SIGN DETAIL
1:75

SB-TR-05
STA. 41+50

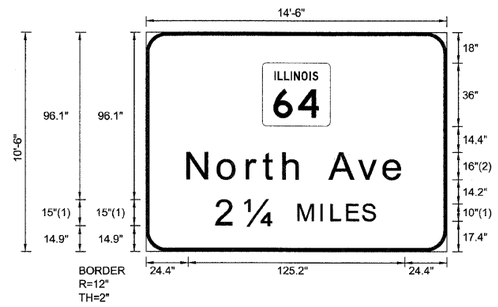

SIGN NUMBER	name	
WIDTH x HGHT.	14'-6" x 10'-6"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT
M1-1100A-2-22-10D	0	67.4	72	39.3	36

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																						LENGTH	SERIES/SIZE
N	o	r	t	h		A	v	e																															ClearviewHwy-5-W-R
24.4	42.1	58.9	68.3	80.1	91.2	106.6	123.2	137.9																														125.3	16/13
2	¼	M	I	L	E	S																																	ClearviewHwy-5-W
41.2	57.5	88.5	101.7	107.6	116.6	125.6																																91.6	15,10

FILE NAME =	DESIGNED - SEW	REVISED -	
$FILEL$	DRAWN - SEW	REVISED -	
USER NAME = $USER$	CHECKED - FML	REVISED -	
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -	

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 12 OF 71 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*	22(1, 1-1, 2&3)RS-7	DUPAGE	661	594
* 290,355		CONTRACT NO. 60G51		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		