SIGN DETAIL

1:75

SB-GM-09
STA. 60+50

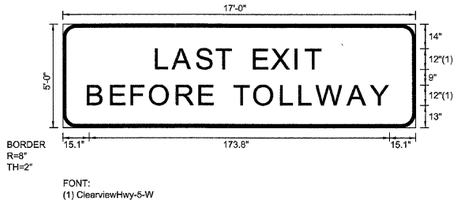

SIGN NUMBER	name	
WIDTH x HGHT.	17'-0" x 5'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	8"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

L	A	S	T		E	X	I	T							LENGTH	SERIES/SIZE
54.5	64.1	77.8	89.2	97.8	111	121.3	134.9	140.8							94.9	12
B	E	F	O	R	E		T	O	L	L	W	A	Y			ClearviewHwy-5-W
15.1	28.4	40.1	50.9	66.3	79.4	87	99.5	111.2	126.7	137.5	147.1	165.3	178.4		173.8	12

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 16 OF 71 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*	22(1, 1-1, 2&3)RS-7	DUPAGE	661	598
* 290,355		CONTRACT NO. 60G51		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		