SIGN DETAIL

1:75

SB-TR-14
STA. 122+00

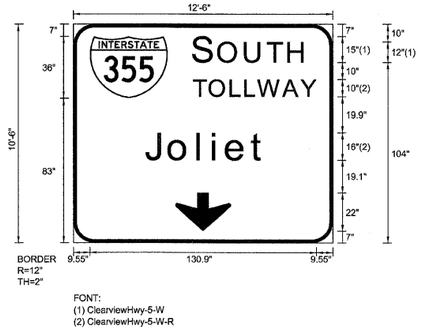

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SIGN NUMBER	Right Exit – Ground
WIDTH x HGHT.	12'–6" x 10'–6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	9.5	83	45	36
ARDOWN	0	59	7	32	22

Panel Style: guide_exp_advance_a.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																						LENGTH	SERIES/SIZE
S	O	U	T	H																																				ClearviewHwy-5-W
69.5	84.3	99.7	112.6	124.8																																			64.4	15,12
T	O	L	L	W	A	Y																																		ClearviewHwy-5-W-R
69.5	78.7	91	99.4	106.9	121.4	131.7																																	70.9	10
J	o	l	i	e	t																																			ClearviewHwy-5-W-R
42	55.5	72.3	80.8	88.7	103.3																																		69.1	1613

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 21 OF 71 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	22(1, 1-1, 2&3)RS-7	DUPAGE	661	603
• 290,355		CONTRACT NO. 60G51		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		