SIGN DETAIL

1:75

EB-BM-06
STA. 22+50

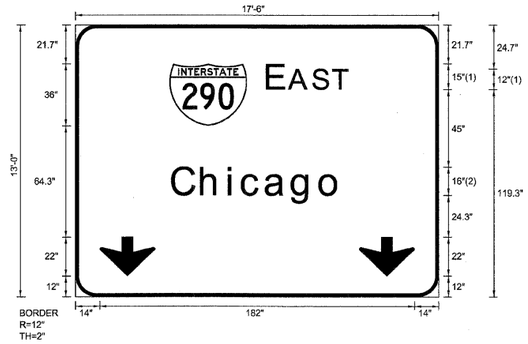

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SIGN NUMBER	name
WIDTH x HGHT.	17'-6" x 13'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	54.2	98.3	45	36
ARDOWN	0	14	12	32	22
ARDOWN	0	164	12	32	22

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																						LENGTH	SERIES/SIZE
E	A	S	T																																						ClearviewHwy-5-W
111.2	124	137.7	149.1																																					46.5	15,12
C	h	i	c	a	g	o																																			ClearviewHwy-5-W-R
56.1	73	88.8	96.6	110.2	125.5	141.6																																		97.8	1613

FILE NAME = $FILEL$	DESIGNED - SEW	REVISED -	LIN ENGINEERING,LTD. Consulting Engineers Chatham, Illinois Westmont, Illinois
	DRAWN - SEW	REVISED -	**STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION**
USER NAME = $USER$	CHECKED - FML	REVISED -	**SIGNING DETAILS**
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -	SCALE: N.T.S. SHEET NO. 27 OF 71 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*	22(1, 1-1, 2&3)RS-7	DUPAGE	661	609
* 290,355		CONTRACT NO. 60G51		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		