SIGN DETAIL

1:75

EB-GM-12
STA. 144+00

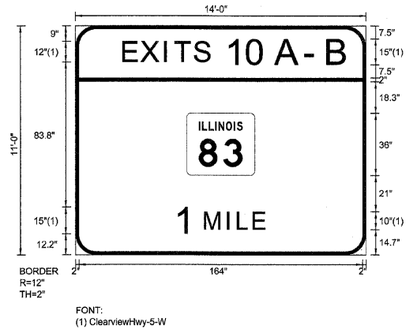

FONT:
(1) ClearviewHwy-5-W

SIGN NUMBER	name
WIDTH x HGHT.	14'-0" x 11'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1-1100A-2-22-10D	0	55.4	57.5	39.3	36
,					

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																		LENGTH	SERIES/SIZE
E	X	I	T	S	1	0	A	–	B																										ClearviewHwy-5-W
14.3	22.9	34.2	39.2	48.6	65.8	78.1	94.1	112.5	124.3																									121.4	10,15
1	M	I	L	E																															ClearviewHwy-5-W
49.4	66.2	79.3	85.2	94.2																														51.2	15,10

FILE NAME = $FILE1$	DESIGNED - SEW	REVISED -	
	DRAWN - SEW	REVISED -	
USER NAME = $USER$	CHECKED - FML	REVISED -	
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -	

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 33 OF 71 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	22(1, 1-1, 2&3)RS-7	DUPAGE	661	615
•	290,355	CONTRACT NO. 60G51		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		