SIGN DETAIL

1:75

EB-TR-14
STA. 192+10

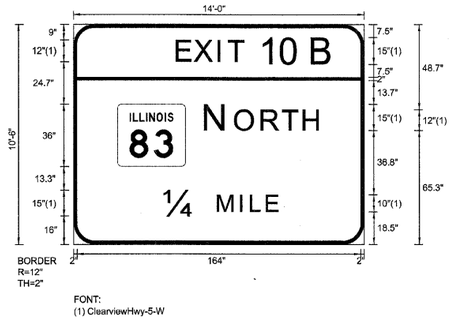

FONT:
(1) ClearviewHwy-5-W

SIGN NUMBER	name
WIDTH x HGHT.	14'-0" x 10'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1-1100A-2-22-10D	0	25.4	44.3	39.3	36

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

								LENGTH	SERIES/SIZE
E	X	I	T	1	0	B			ClearviewHwy-5-W
60.2	70.4	84.1	90	108.7	120.9	138.6		89.8	12,15
N	O	R	T	H					ClearviewHwy-5-W
76.7	93.9	109.3	121.2	133.4				65.9	15,12
1/4	M	I	L	E					ClearviewHwy-5-W
52.8	83.8	96.9	102.9	111.9				65.5	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILE$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 35 OF 71 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*	22(1, 1-1, 2&3)RS-7	DUPAGE	661	617
* 290,355		CONTRACT NO. 60G51		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		