SIGN DETAIL

1:75

EB-TR-21
STA. 250+40

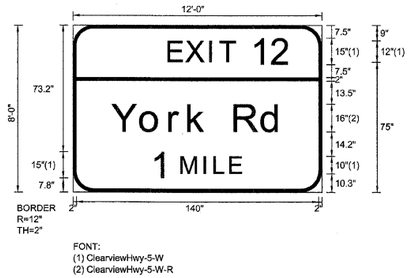

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SIGN NUMBER	name
WIDTH x HGHT.	12'-0" x 8'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																						LENGTH	SERIES-SIZE
E	X	I	T	1	2																																			ClearviewHwy-5-W
55.7	66	79.6	85.6	104.2	115.7																																	70.3	12,15
Y	o	r	k		R	d																																		ClearviewHwy-5-W-R
22.9	39.4	56.2	67.2	78.5	93.8	109.5																																	98.2	16/13
1	M	I	L	E																																			ClearviewHwy-5-W
46.4	63.2	76.3	82.2	91.3																																	51.2	15,10

FILE NAME =	DESIGNED - SEW	REVISED -	
$FILE1$	DRAWN - SEW	REVISED -	
USER NAME = $USER$	CHECKED - FML	REVISED -	
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -	

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 40 OF 71 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	22(1, 1-1, 2&3)RS-7	DUPAGE	661	622
•	290,355	CONTRACT NO. 60G51		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		