SIGN DETAIL

1:75

WB-TR-22
STA. 219+50

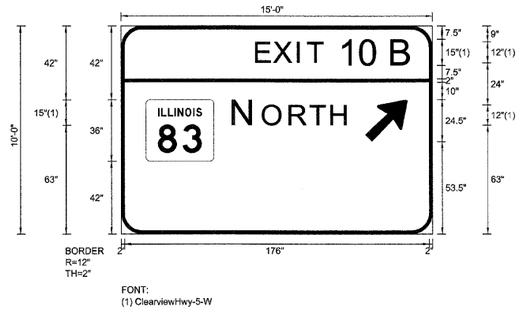

FONT:
(1) ClearviewHwy-5-W

SIGN NUMBER	name
WIDTH x HGHT.	15'-0" x 10'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
ARMED	45	141.1	53.5	20	31.5
M1-1100A-2-22-100	0	14.4	42	39.3	36

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)							LENGTH	SERIES/SIZE
E	X	I	T	1	0	B		ClearviewHwy-5-W
78.6	87.1	98.5	103.5	120.7	132.9	150.6	83.4	10,15
N	O	R	T	H				ClearviewHwy-5-W
65.7	80.4	95.8	107.7	120			63.5	12

FILE NAME =	DESIGNED - SEW	REVISED -
$FILE1$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 58 OF 71 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*	22(1, 1-1, 2&3)RS-7	DUPAGE	661	640
* 290,355		CONTRACT NO. 60G51		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		