SIGN DETAIL

1:75

WB-TR-21
STA. 219+50

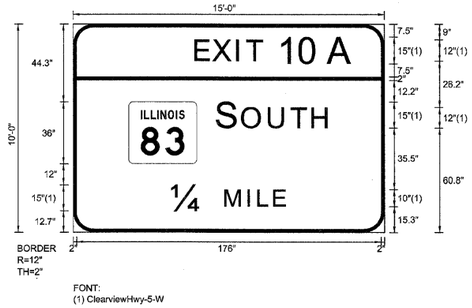

SIGN NUMBER	name
WIDTH x HGHT.	15'-0" x 10'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1-1100A-2-22-10D	0	32.2	39.7	39.3	36

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																		LENGTH	SERIES/SIZE
E	X	I	T	1	0	A																														ClearviewHwy-5-W
71.1	81.4	95.1	101	119.6	131.9	148																													90.9	12,15
S	O	U	T	H																																ClearviewHwy-5-W
83.4	98.2	113.6	126.5	138.7																															64.4	15,12
1/4	M	I	L	E																																ClearviewHwy-5-W
57.3	88.3	101.4	107.3	116.4																															65.5	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILE$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 59 OF 71 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	22(1, 1-1, 2&3)RS-7	DUPAGE	661	641
•	290,355	CONTRACT NO. 60G51		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		