SIGN DETAIL

1:75

WB-GM-23
STA. 232+40

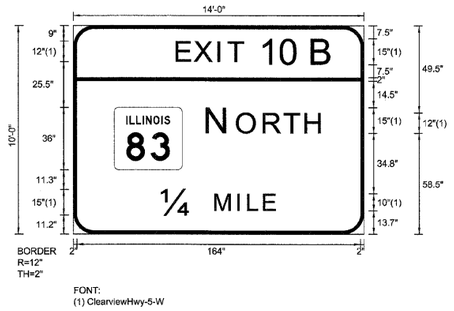

SIGN NUMBER	name
WIDTH x HGHT.	14'-0" x 10'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1-1100A-2-22-10D	0	23.6	37.5	39.3	36

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

								LENGTH	SERIES/SIZE
E	X	I	T	1	0	B			ClearviewHwy-5-W
60.2	70.4	84.1	90	108.7	120.9	138.6		89.8	12,15
N	O	R	T	H					ClearviewHwy-5-W
77.9	95.1	110.5	122.4	134.6				65.9	15,12
1/4	M	I	L	E					ClearviewHwy-5-W
51.3	82.3	95.4	101.3	110.4				65.5	15,10

FILE NAME = $FILE1$	DESIGNED - SEW	REVISED -	LIN ENGINEERING,LTD. Consulting Engineers Chatham, Illinois Westmont, Illinois
USER NAME = $USER$	DRAWN - SEW	REVISED -	**STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION**
PLOT DATE = $DATE$	CHECKED - FML	REVISED -	**SIGNING DETAILS**
	DATE - 12/2009	REVISED -	SCALE: N.T.S. SHEET NO. 61 OF 71 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*	22(1, 1-1, 2&3)RS-7	DUPAGE	661	643
* 290,355		CONTRACT NO. 60G51		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		