SIGN DETAIL

1:75

EB-BM-10I
STA. 75+32

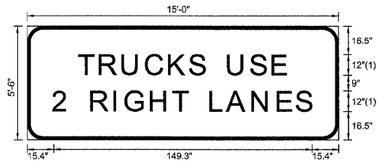

FONT:
(1) ClearviewHwy-5-W

SIGN NUMBER	name	
WIDTH x HGHT.	15'-0" x 5'-6"	
BORDER WIDTH	2"	
CORNER RADIUS	9"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	White
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	Black/Black

SYMBOL	ROT	X	Y	WID	HT

Panel Style: Regulatory_Signs.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)															LENGTH	SERIES/SIZE
T	R	U	C	K	S		U	S	E							ClearviewHwy-5-W
30.2	42.4	55.5	69.1	82.5	94.4	103	116.5	129.6	142.2						119.7	12
2		R	I	G	H	T		L	A	N	E	S				ClearviewHwy-5-W
15.4	23.6	37.5	50.6	57.2	71.9	84.6	93.3	106.4	115.9	130.6	145.3	156			149.3	12

FILE NAME =	DESIGNED - SEW	REVISED -	
$FILE1$	DRAWN - SEW	REVISED -	
USER NAME = $USER$	CHECKED - FML	REVISED -	
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -	

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 64 OF 71 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
*	22(1, 1-1, 2&3)RS-7	DUPAGE	661	646
* 290,355		CONTRACT NO. 60G51		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		