SIGN DETAIL
1:75

EB-TR-63
STA. 600+00

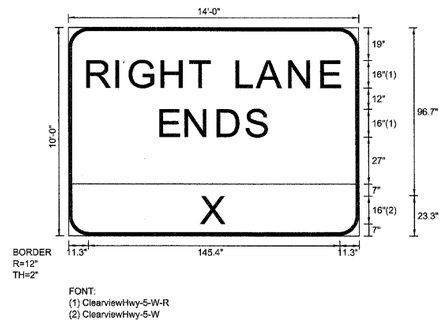

SIGN NUMBER	name	
WIDTH x HGHT.	14'-0" x 10'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Yellow
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	Black/Black

SYMBOL	ROT	X	Y	WID	HT

Panel Style: exit_overhead.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

R	I	G	H	T		L	A	N	E	LENGTH	SERIES-SIZE
11.3	27.8	35.7	54.3	70.3	81.8	97.6	109.4	128	146.6	145.5	ClearviewHwy-5-W-R 16
E	N	D	S							61.1	ClearviewHwy-5-W-R 16
53.5	68.1	86.7	103								
X										13.8	ClearviewHwy-5-W 16
77.1											

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 11 OF 77 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	339
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		