SIGN DETAIL

1:75

EB-TR-78
STA. 715+30

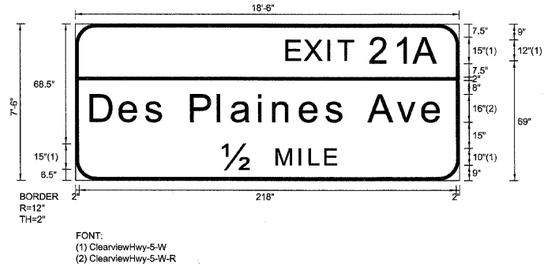

SIGN NUMBER	name	
WIDTH x HGHT.	18'-6" x 7'-6"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																LENGTH	SERIES/SIZE
E	X	I	T	2	1	A											ClearviewHwy-5-W
122.6	132.9	146.6	152.5	171.1	185.3	196.4										87.8	12,15
D	e	s		P	l	a	i	n	e	s		A	v	e			ClearviewHwy-5-W-R
9.2	26	40.8	51	67.2	82.8	90.7	106.3	114.8	130.3	145.1	155.3	169.8	186.4	201.1		203.7	16/13
12	M	I	L	E													ClearviewHwy-5-W
85.3	116.6	129.7	135.7	144.7												65.8	15,10

FILE NAME =	DESIGNED - SEW	REVISED -	LIN ENGINEERING, LTD. Consulting Engineers Chatham, Illinois Westmont, Illinois
$FILEL$	DRAWN - SEW	REVISED -	
USER NAME = $USER$	CHECKED - FML	REVISED -	
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 24 OF 77 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	352
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		