SIGN DETAIL
1:75

EB-BM-86
STA. 808+65

SIGN NUMBER	name
WIDTH x HGHT.	17'-6" x 8'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

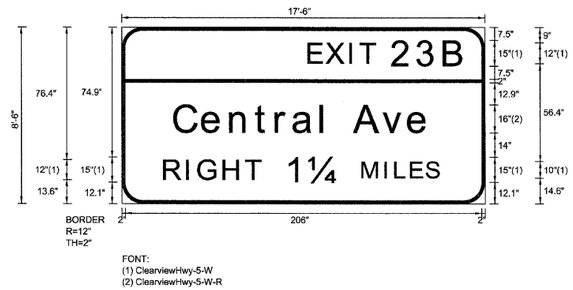

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

													LENGTH	SERIES/SIZE
E	X	I	T	2	3	B								ClearviewHwy-5-W
108.4	118.7	132.4	138.3	156.9	171.3	187.1							90	12,15
C	e	n	t	r	a	l		A	v	e				ClearviewHwy-5-W-R
30.7	46.9	63.1	77.6	89.5	99.5	115.5	120.5	134.7	151.3	166			147.1	16/13
R	I	G	H	T	1	¼	M	I	L	E	S			ClearviewHwy-5-W
24.8	37.9	44.6	59.2	72	95.6	108.3	139.4	152.5	158.4	167.4	176.4		158.8	12,15,10

FILE NAME =	DESIGNED - SEW	REVISED -	
$FILEL$	DRAWN - SEW	REVISED -	
USER NAME = $USER$	CHECKED - FML	REVISED -	
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -	

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 30 OF 77 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	358
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		