SIGN DETAIL
1:75

WB-CL-76
STA. 595+90

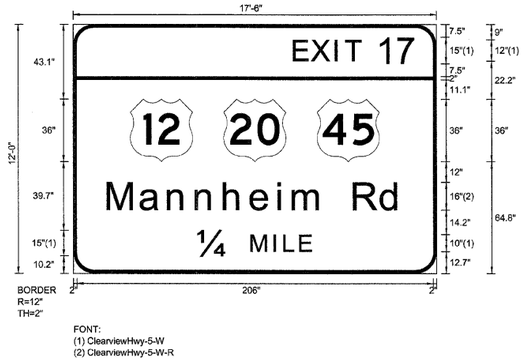

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SIGN NUMBER	name
WIDTH x HGHT.	17'-6" x 12'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1_4	0	33	64.9	36	36
M1_4	0	87	64.9	36	36
M1_4	0	141	64.9	36	36

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)												LENGTH	SERIES-SIZE
E	X	I	T	1	7								ClearviewHwy-5-W
128.2	138.4	152.1	158	176.7	187.9							70.3	12,15
M	a	n	n	h	e	i	m		R	d			ClearviewHwy-5-W-R
20.2	39.1	55.1	71.2	87.4	102.9	118.8	127.3	145.3	162.5	178.3		169.7	16/13
¼	M	I	L	E									ClearviewHwy-5-W
72.3	103.3	116.4	122.3	131.4								65.5	15,10

FILE NAME =	DESIGNED - SEW	REVISED -	LIN ENGINEERING, LTD. Consulting Engineers Chatham, Illinois Westmont, Illinois
$FILE_$	DRAWN - SEW	REVISED -	**STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION**
USER NAME = $USER$	CHECKED - FML	REVISED -	**SIGNING DETAILS**
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -	SCALE: N.T.S. SHEET NO. 50 OF 77 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	378
		CONTRACT NO. 60652		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		