SIGN DETAIL

1:75

EB-BM-114
STA. 1118+00

SIGN NUMBER	name
WIDTH x HGHT.	15'-6" x 8'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

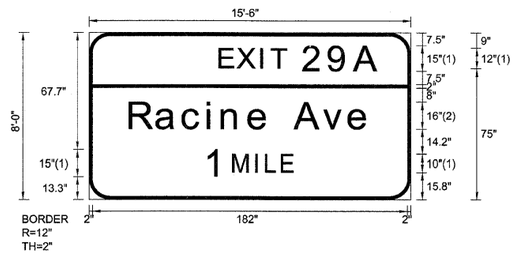

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

										LENGTH	SERIES/SIZE
E	X	I	T	2	9	A					ClearviewHwy-5-W
75.9	86.2	99.9	105.8	124.4	139.3	154				92.1	12,15
R	a	c	i	n	e		A	v	e		ClearviewHwy-5-W-R
23.8	39.2	54.5	68.7	77.1	92.7	104.4	119.2	135.8	150.5	138.5	16/13
1	M	I	L	E							ClearviewHwy-5-W
67.9	83.7	96.8	102.7	111.8						50.2	15,10

FILE NAME =	DESIGNED - SEW	REVISED -	
$FILEL$	DRAWN - SEW	REVISED -	
USER NAME = $USER$	CHECKED - SEW	REVISED -	
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -	

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 16 OF 79 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2828B,D, ETC., 3031.1)RS-6	COOK	300	229
		CONTRACT NO. 60G53		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		