SIGN DETAIL
1:75

WB-BM-113
STA. 943+70

SIGN NUMBER	name	
WIDTH x HGHT.	17'-0" x 8'-6"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT

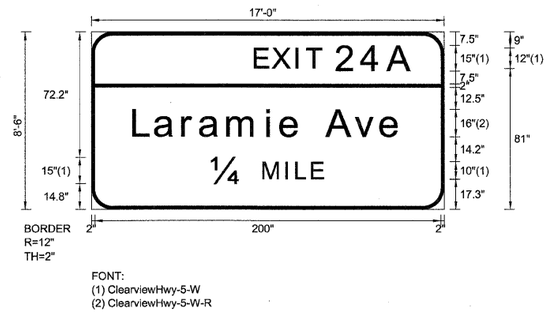

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																								LENGTH	SERIES/SIZE
E	X	I	T	2	4	A																																			ClearviewHwy-5-W
94.9	105.2	118.9	124.8	142.4	156.9	172																																		91.1	12,15
L	a	r	a	m	i	e		A	v	e																															ClearviewHwy-5-W-R
24.7	37.1	53	63.1	79	101.9	109.7	121.5	136.3	152.9	167.6																														154.6	16/13
¼	M	I	L	E																																					ClearviewHwy-5-W
69.8	99.8	112.9	118.8	127.9																																				64.5	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - SEW	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Wilsonville, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 44 OF 79 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2828B,D, ETC., 3031.1)RS-6	COOK	300	257
		CONTRACT NO. 60053		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		