SIGN DETAIL
1:75

WB-BM-120
STA. 1038+10

SIGN NUMBER	name
WIDTH x HGHT.	16'-6" x 8'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

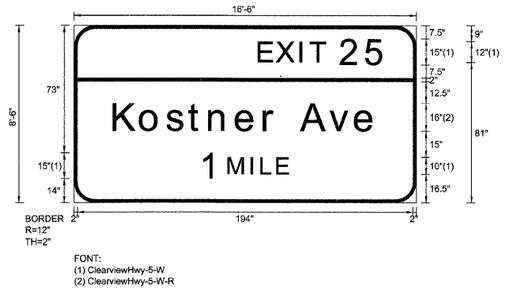

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

											LENGTH	SERIES/SIZE
E	X	I	T	2	5							ClearviewHwy-5-W
107.3	117.6	131.2	137.1	154.8	169.7						72.7	12,15
K	o	s	t	n	e	r		A	v	e		ClearviewHwy-5-W-R
23.3	38.6	54	66.7	78.6	94.1	110.3	117.6	131.6	148.2	162.9	151.3	16/13
1	M	I	L	E								ClearviewHwy-5-W
73.9	89.7	102.8	108.7	117.8							50.2	15,10

FILE NAME =	DESIGNED - SEW	REVISED -	LIN ENGINEERING, LTD. Consulting Engineers Chatham, Illinois Westmont, Illinois	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SIGNING DETAILS
$FILEL$	DRAWN - SEW	REVISED -			
USER NAME = $USER$	CHECKED - SEW	REVISED -			
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -			SCALE: N.T.S. SHEET NO. 49 OF 79 SHEETS STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2828B,D, ETC., 3031.1)RS-6	COOK	300	262
		CONTRACT NO. 60G53		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		