SIGN DETAIL
1:75

EB-TR-24
STA. 302+80

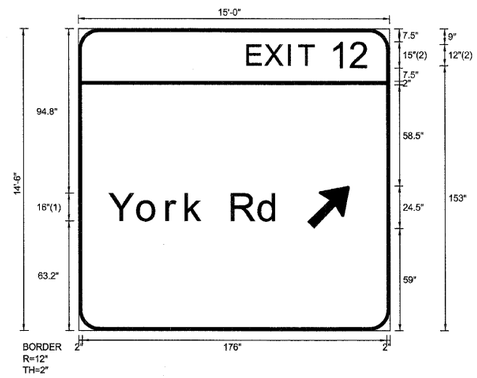

FONT:
(1) ClearviewHwy-5-W-R
(2) ClearviewHwy-5-W

SIGN NUMBER	name	
WIDTH x HGHT.	15'-0" x 14'-6"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT
ARMED	45	132.2	59	20	31.5

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																								LENGTH	SERIES/SIZE
E	X	I	T	1	2																																				ClearviewHwy-5-W
98.1	108.4	122	128	146.6	158.1																																			70.3	12,15
Y	o	r	k		R	d																																			ClearviewHwy-5-W-R
18	34.5	51.3	62.3	73.6	88.9	104.6																																		98.2	16/13

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 3 OF 58 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	2009-099BR	COOK/DUPAGE	394	331
		CONTRACT NO. 60157		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		