

## HOT-MIX ASPHALT DESIGN

TO BE USED AT STRUCTURES 039-0013, 039-0049, 039-0065

LOCATION:	HOT MIX ASPHALT SURFACE COURSE
MIXTURE USE(S):	POLYMERIZED HOT-MIX ASPHALT SURFACE CURSE, MIX D, N105
AC/PG:	SBS PG76-22
RAP % (MAX):	0
DESIGN AIR VOIDS:	4.0%, 105 GYRATION DESIGN
MIXTURE COMPOSITION: (GRADATION MIXTURE)	IL - 9.5 mm OR IL 12.5 mm
FRICTION AGGREGATE:	D SURFACE

TO BE USED AT STRUCTURES 028-0051 & 039-0056


LOCATION:	HOT MIX ASPHALT SURFACE COURSE
MIXTURE USE(S):	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N90
AC/PG:	PG64-22
RAP % (MAX):	10
DESIGN AIR VOIDS:	4.0%, 90 GYRATION DESIGN
MIXTURE COMPOSITION: (GRADATION MIXTURE)	IL - 9.5 mm OR IL 12.5 mm
FRICTION AGGREGATE:	C SURFACE

LOCATION:	HOT MIX ASPHALT BINDER COURSE
MIXTURE USE(S):	HOT-MIX ASPHALT BINDER COURSE, N90, IL-19.0
AC/PG:	PG64-22
RAP % (MAX):	10
DESIGN AIR VOIDS:	4.0%, 90 GYRATION DESIGN
MIXTURE COMPOSITION: (GRADATION MIXTURE)	IL - 9.0 mm
FRICTION AGGREGATE:	NONE

## PAINT PAVEMENT MARKING - LINE 4" (FOOT)

	028-0051	039-0013	039-0049	039-0056	039-0065	
YELLOW	317	160	170	119	37	
WHITE	282	200	213	106	294	
TOTAL	599	360	383	225	331	

Note: Raised Reflective Pavement Markers will be replaced by others on a separate contract.

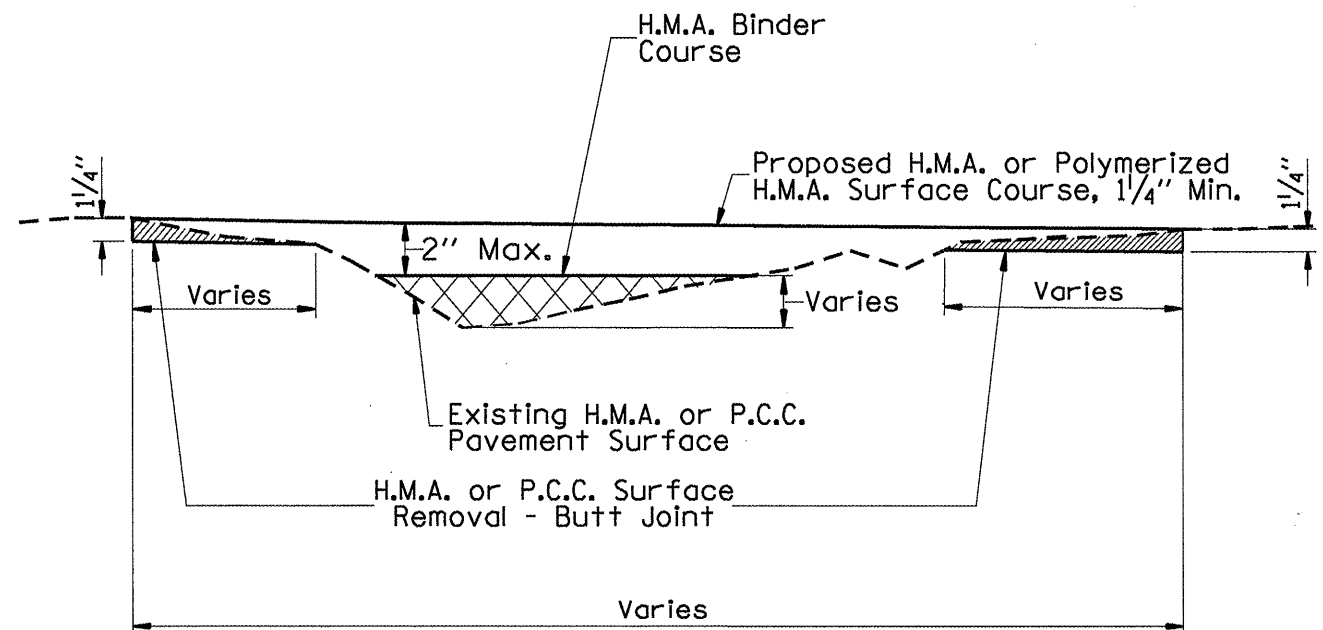

TYPICAL H.M.A. BINDER COURSE