SIGN DETAIL

1:75

WB-TR-55
STA. 474+80

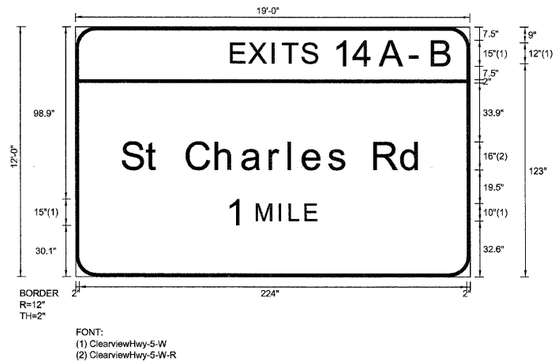

SIGN NUMBER	name	
WIDTH x HGHT.	19'-0" x 12'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																						LENGTH	SERIES/SIZE
E	X	I	T	S	1	4	A	–	B																														ClearviewHwy-5-W
90.4	100.6	114.3	120.2	131.5	150.1	161.7	176.7	195.1	206.9																													128	12,15
S	t		C	h	a	r	l	e	s		R	d																											ClearviewHwy-5-W-R
27.2	41.3	49.1	64.6	81.4	96.6	112.6	123.6	131.8	146.6	156.8	173.1	188.8																										173.1	16/13
1	M	I	L	E																																			ClearviewHwy-5-W
88.2	104.9	118.1	124	133																																		51.2	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 48 OF 58 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	2009-099BR	COOK/DUPAGE	394	376
		CONTRACT NO. 60157		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		