


* - LOCATION	LEFT
STA 576+00	31.3'
STA 579+00	25.2'
STA 582+74	25.4'
STA 587+00	25.2'
STA 592+00	25.1'
STA 602+00	26.0'
STA 602+65	26.0'

STA 575+89 TO STA 577+99.99  
 STATION EQUATION:  
 STA 577+99.99 (BK) = STA. 578+00.00 (AHD)  
 STA 578+00.00 TO STA 602+65.50

** - LOCATION	LEFT
STA 576+00	26.7'
STA 579+00	26.6'
STA 582+74	26.1'
STA 584+80	36.6'
STA 586+66	36.0'
STA 587+00	26.1'
STA 592+00	26.5'
STA 597+00	26.7'
STA 602+00	26.2'
STA 602+65	26.8'

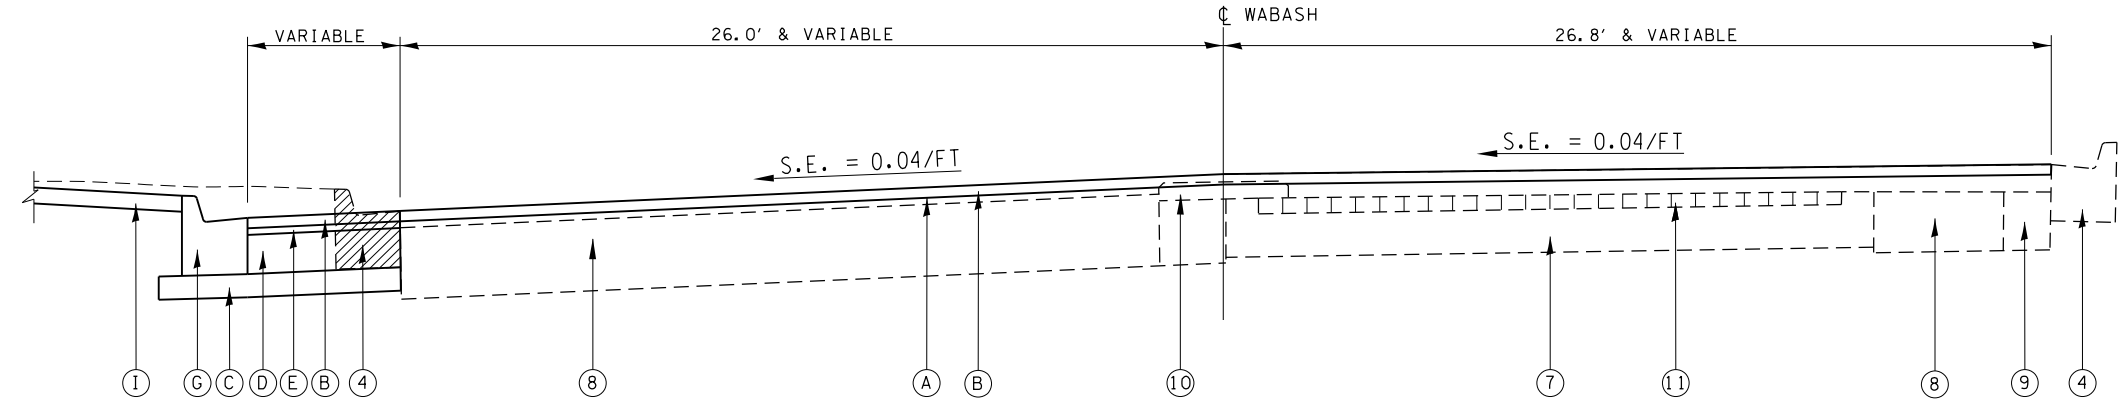

- PR COMBINATION CURB & GUTTER REMOVAL  
 STA. 602+65.50 TO STA. 85+03.75

STA 602+65.50 TO STA 603+08.51  
 STATION EQUATION:  
 STA 603+08.51 (BK) = STA. 83+28.31 (AHD)  
 STA 83+28.31 TO STA 85+03.75

NOTE:  
 SEE STRIPING DETAIL FOR LAYOUT OF PAVEMENT MARKINGS FOR THRU LANES, TURNING LANES, ISLANDS, ETC.

**EXISTING LEGEND**

- ① PCC PAVEMENT
- ② HMA SURFACE, 3 1/2" AND VARIABLE
- ③ CONCRETE MEDIAN
- ④ CONCRETE CURB AND GUTTER
- ⑤ PIPE UNDERDRAINS
- ⑥ NOT USED
- ⑦ PCC BASE COURSE +/- 7"
- ⑧ PCC BASE COURSE, 9"
- ⑨ PCC BASE COURSE WIDENING, 9"
- ⑩ PCC MEDIAN, TYPE C-4 (MODIFIED)
- ⑪ BRICK PAVEMENT 2 1/2"

**PROPOSED LEGEND**

- Ⓐ HOT-MIX ASPHALT SURFACE REMOVAL, VARIABLE DEPTH (1 1/2" @  $\phi$ )
- Ⓑ POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "E", N70, 1 1/2"
- Ⓒ SUB-BASE GRANULAR MATERIAL, TY B (DEPTH = 4")
- Ⓓ BASE COURSE (OPTION), (10 1/2" DEPTH)
- Ⓔ ITEM OMITTED
- Ⓕ PAVEMENT MARKING 5"
- Ⓖ COMBINATION CONCRETE CURB & GUTTER, TYP B-6.24
- Ⓗ CONCRETE MEDIAN SURFACE, 4"
- Ⓘ INCIDENTAL HMA SURFACING, 3" DEPTH