




F.A.R.T. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
80	03 IMPROVEMENT SAFETY	BUREAU		6A
FED. ROAD DIST. NO.	ILLINOIS FED. AID PROJECT			
	CONTRACT # 66740			

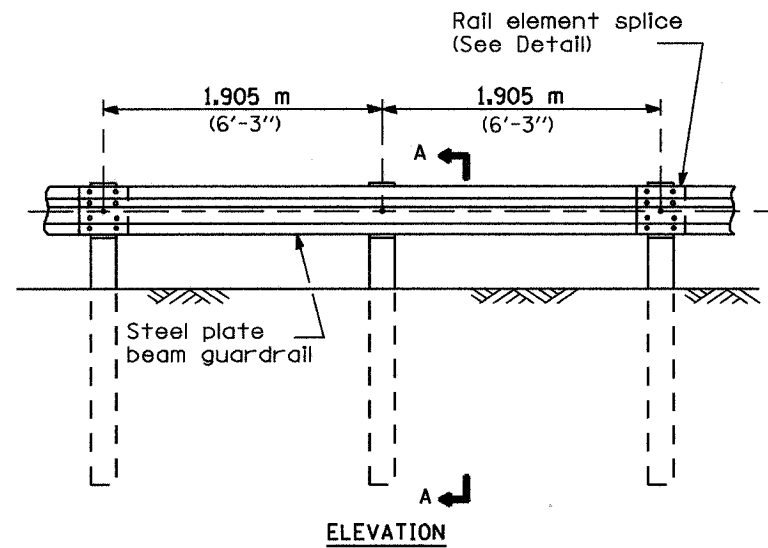


TYPE A
1.905 m (6'-3") Typical post spacing

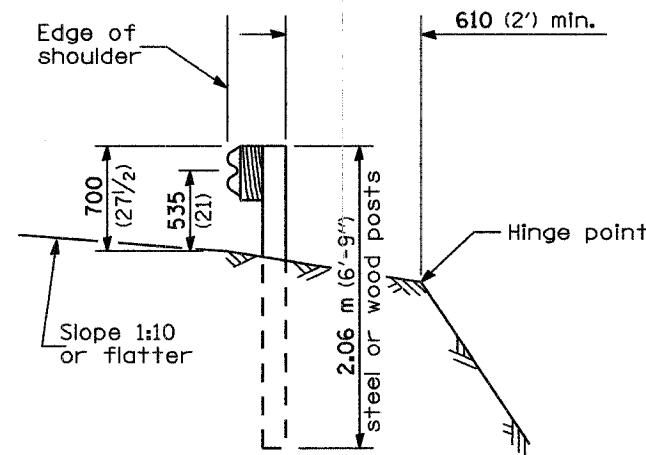


SECTION A-A

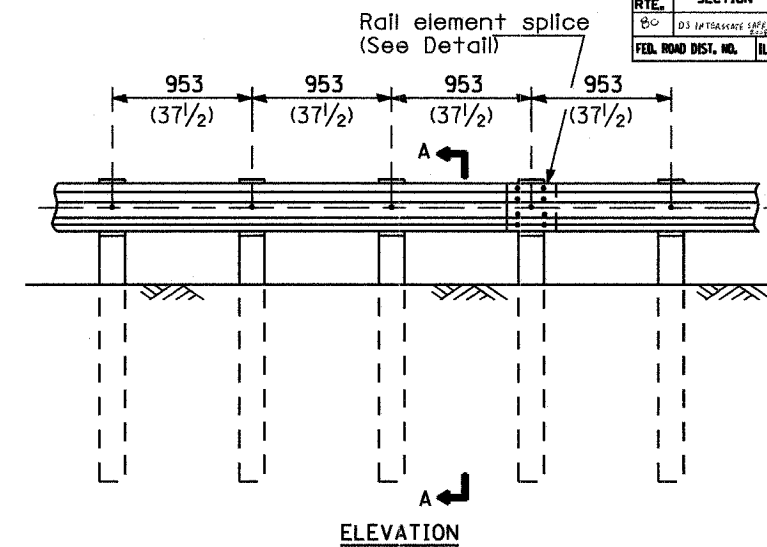


TYPE B
953 (37 1/2) Closed post spacing

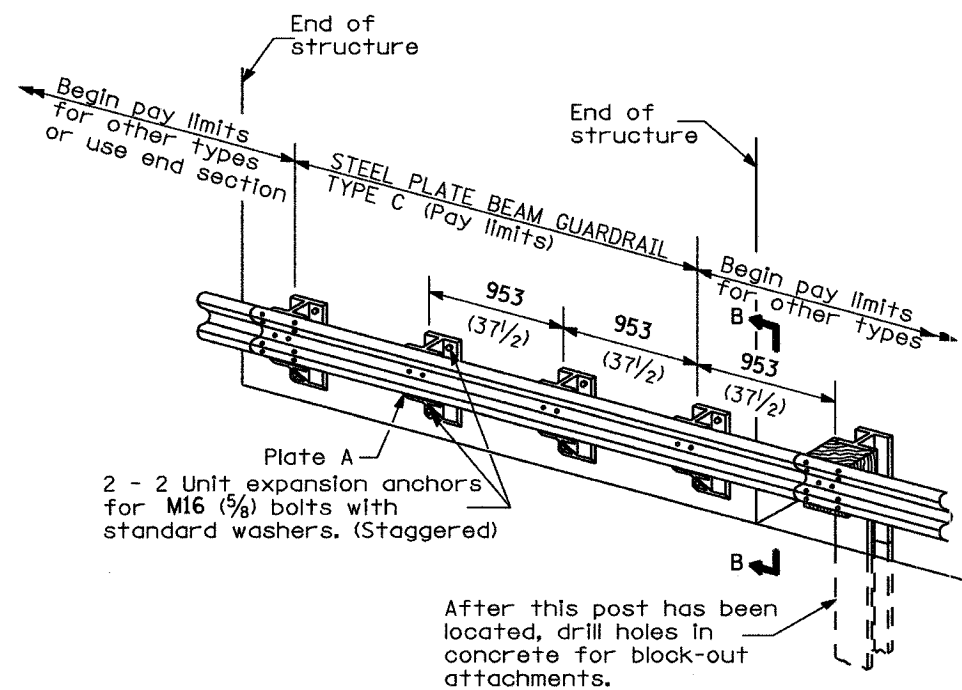


TYPE C
953 (37 1/2) Block-out spacing

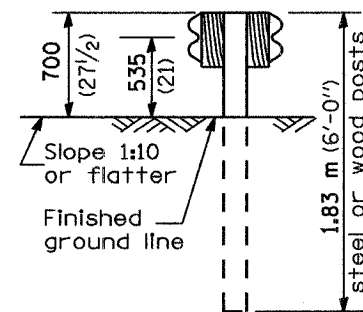

SECTION C-C

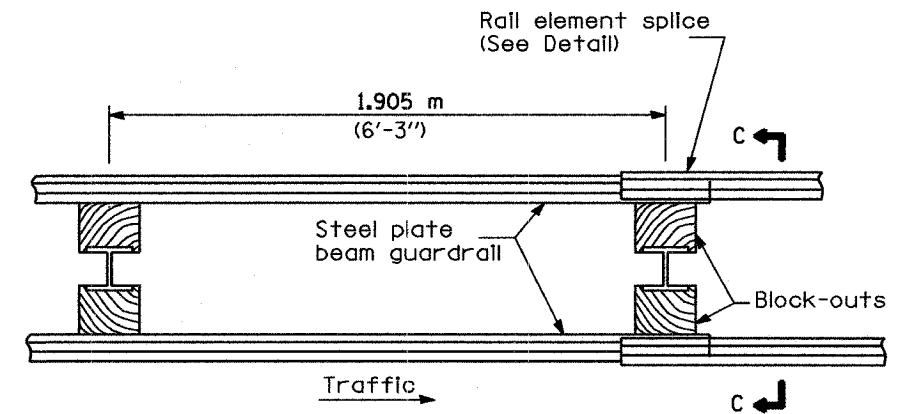

TYPE D
Double steel plate beam guardrail
1.905 m (6'-3") typical post spacing

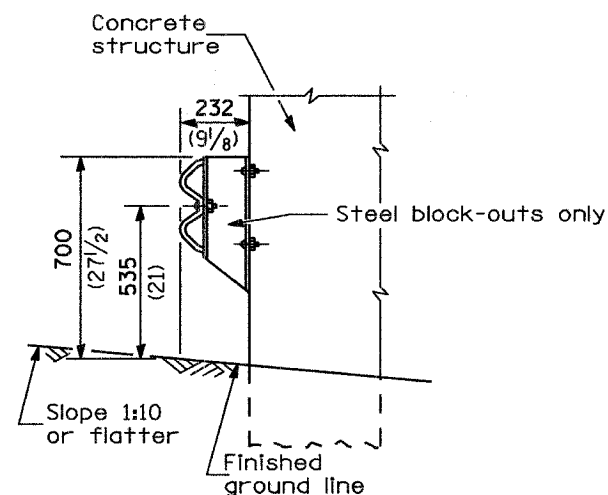

SECTION B-B

GENERAL NOTES

All slope ratios are expressed as units of vertical displacement to units of horizontal displacement (V:H).

All dimensions are in millimeters (inches) unless otherwise shown.

The existing steel posts may be drilled to match the bolt pattern shown herein for the wood block-out, or a new steel post shall be provided.

This detail is applicable to the guardrail system used prior to January 1, 2007. For details on the Midwest Guardrail System, see Standard 630001.

REMOVE AND REERECT STEEL PLATE BEAM GUARDRAIL

(Sheet 1 of 4)

DETAIL