


| | | | | |
|--------------------|----------------|---------|--------------|--------------|
| ROUTE NO. | SECTION | COUNTY | TOTAL SHEETS | SHEET NUMBER |
| ILLINOIS ROUTE 1 | 06-00063-00-SW | EDGAR | 28 | 23 |
| STA. 4+66 | TO STA. 7+15.8 | | | |
| F.H.W.A. REG. | ILLINOIS | PROJECT | TE-0005(83) | |
| CONTRACT NO. 91375 | | | | |
| SCALE IN FEET | | | | |

NOTES:

- ALL NEW PAVEMENT/SIDEWALK SHALL "MATCH" EXISTING PAVEMENT/SIDEWALK. EACH AREA WILL BE EVALUATED BY FIELD ENGINEER AND CONTRACTOR PRIOR TO CONSTRUCTION FOR FINALIZED VERTICAL/HORIZONTAL ALIGNMENTS.
- LIGHT POLES - THE EXISTING LIGHT POLES AND BASES ARE TO REMAIN IN PLACE AND MUST BE PROTECTED DURING CONSTRUCTION. THE CONTRACTOR WILL PLACE A NEW 2-INCH DIAMETER PVC CONDUIT FOR A "FUTURE LIGHTING PROJECT" AS A PART OF THIS PROJECT.

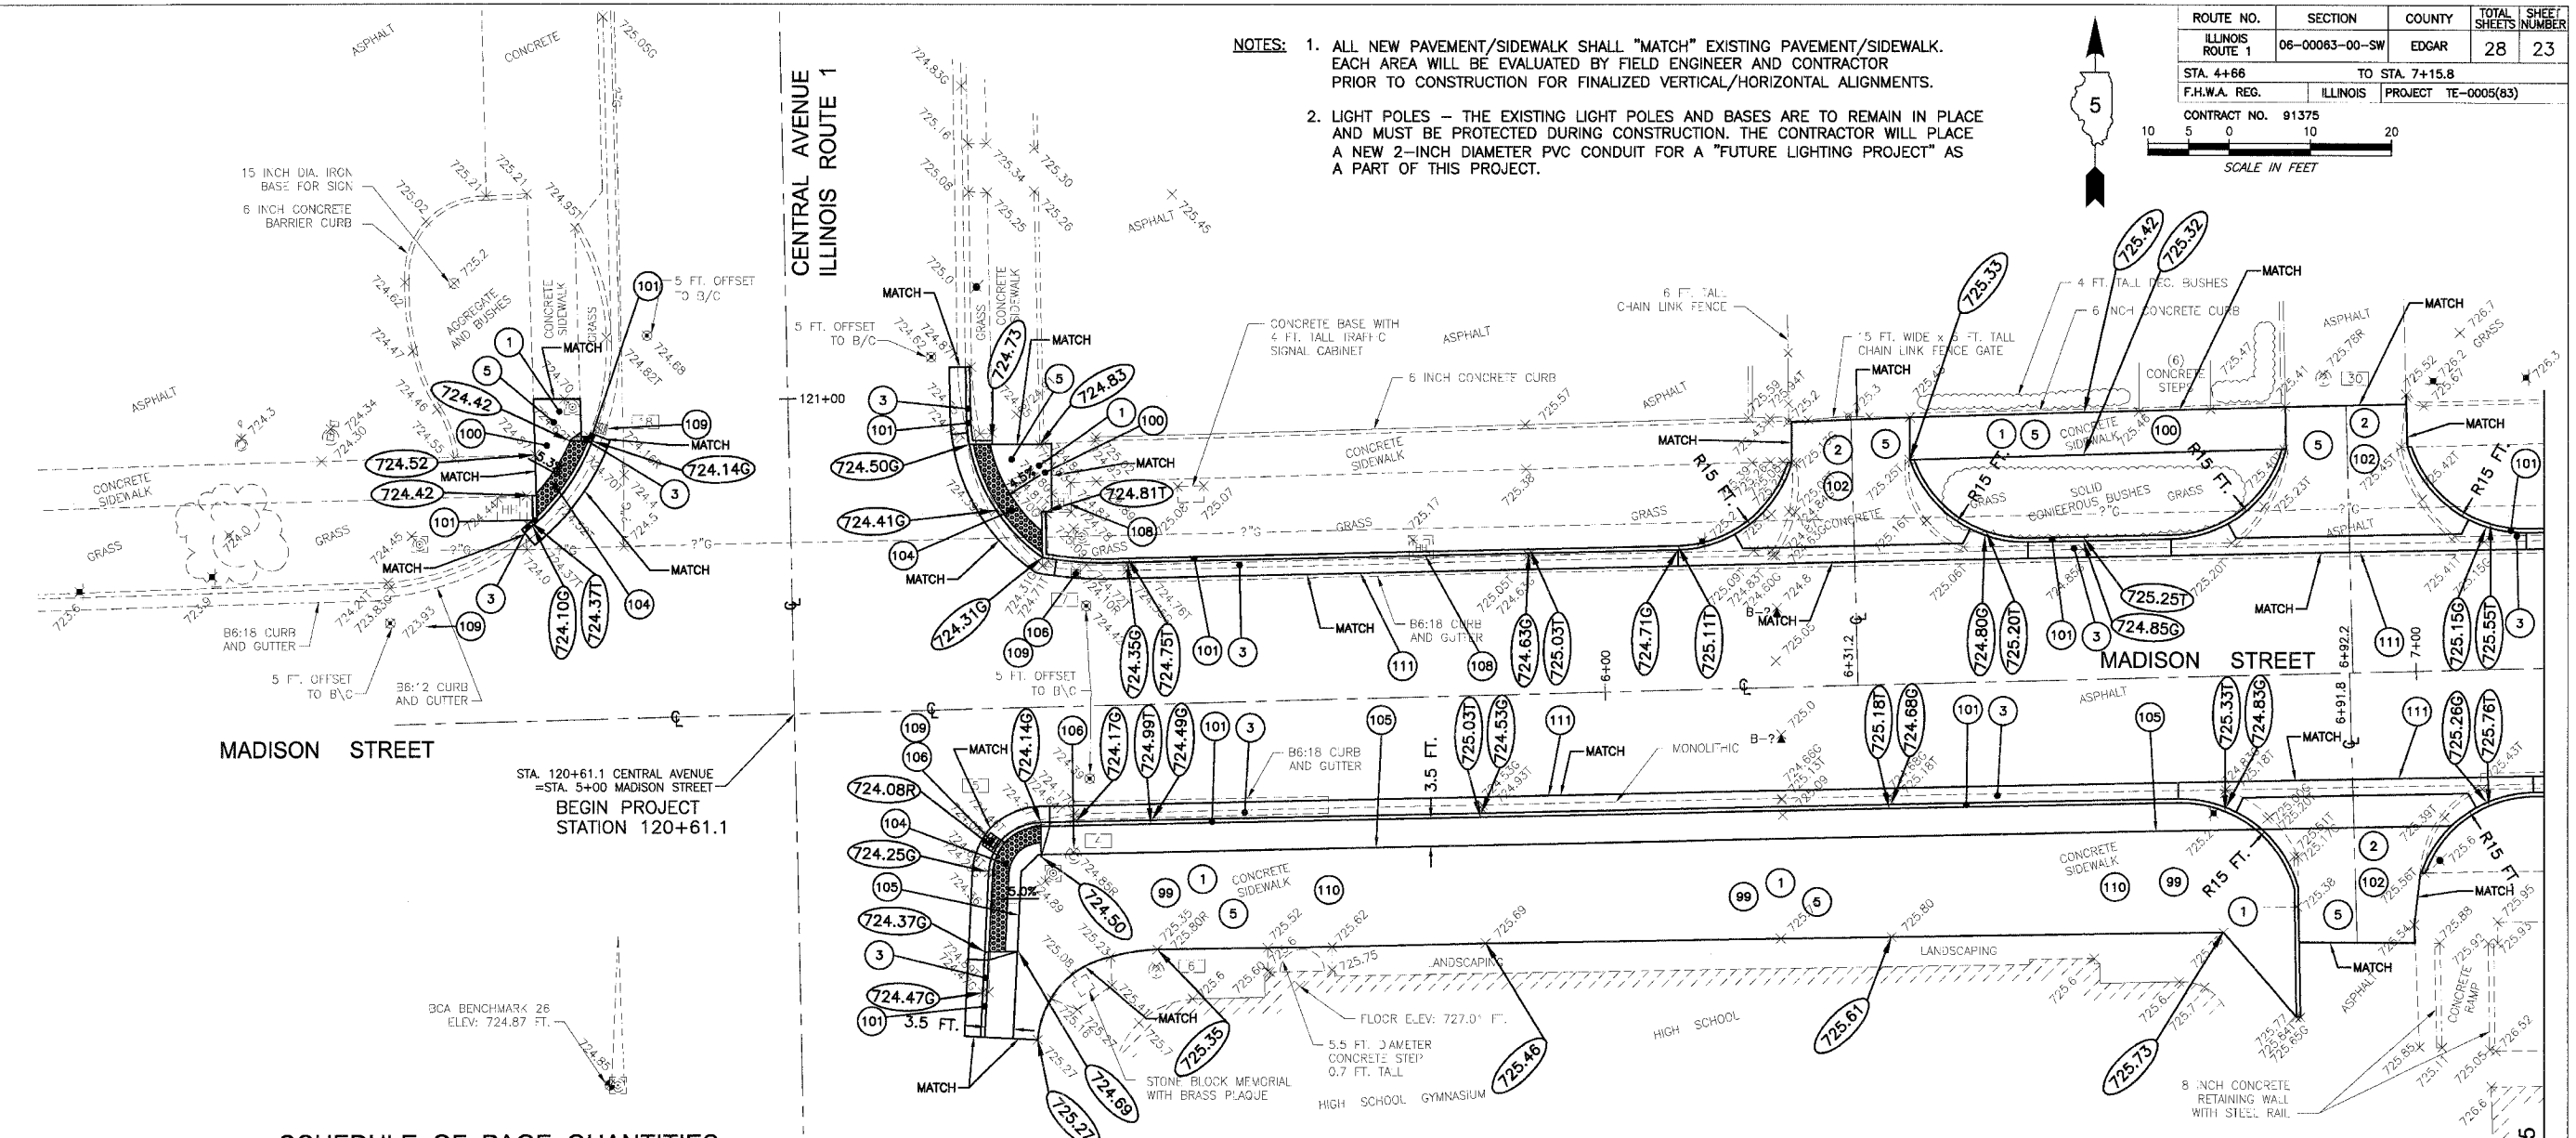

SCHEDULE OF PAGE QUANTITIES

| ITEM NUMBER | PAY ITEM DESCRIPTION | UNIT | QUANTITY |
|-------------|---------------------------|-------|----------|
| 20200100 | EARTH EXCAVATION | CU YD | 20 |
| 21101625 | TOPSOIL F & P 6 INCH | SQ YD | 41 |
| 25000100 | SEEDING, CLASS 1 | ACRE | 0.04 |
| 25000400 | NITROGEN FERT. NuTR | POUND | 9 |
| 25000500 | PHOSPHORUS FERT. NuTR | POUND | 9 |
| 25000600 | POTASSIUM FERT. NuTR | POUND | 9 |
| 25100105 | MULCH METHOD 1 | ACRE | 0.09 |
| 28000500 | INLET AND PIPE PROTECTION | EACH | 5 |
| 35101400 | AGGREGATE BASE CSE B | TONS | 65 |
| 42000500 | PCC PVT 10 | SQ YD | 41 |
| 42300200 | PCC DRIVEWAY PAVT 6 | SQ YD | 106 |
| 42400200 | PC CONCRETE SIDEWALK 5 | SQ FT | 347 |
| 42400300 | PC CONCRETE SIDEWALK 6 | SQ FT | 2,600 |
| 42400800 | DETECTABLE WARNINGS | SQ FT | 83 |
| 44000200 | DRIVEWAY PAVEMENT REMOVAL | SQ YD | 111 |

| ITEM NUMBER | PAY ITEM DESCRIPTION | UNIT | QUANTITY |
|-------------|--------------------------------------|-------|----------|
| 44000500 | COMBINATION CURB & GUTTER REMOVAL | FOOT | 442 |
| 44000600 | SIDEWALK REMOVAL | SQ FT | 3,207 |
| 5000819 | PC SIDEWALK TEXTURED, COLORED 6 INCH | SQ FT | 0 |
| 55021600 | SS 2 RCP CL 3 12 | FOOT | 0 |
| 56500300 | DOM MET VLTS ADJ. | EACH | 0 |
| 56500600 | DOM WATER SER. BOX ADJUSTMENT | EACH | 0 |
| 60236600 | INLET TA T9 F & G | EACH | 0 |
| 60255600 | MANHOLE ADJ. (SPECIAL) | EACH | 1 |
| 60262510 | INLET ADJ. NEW F & G SPL | EACH | 2 |
| 60605000 | COMBINATION C C & G TB 6.24 MOD | FOOT | 442 |
| 81012600 | CON. T2 PVC | FOOT | 198 |
| 81400115 | HANDHOLE TO BE ADJUSTED | EACH | 2 |
| X0322468 | GAS VALVE TO BE ADJUSTED | EACH | 0 |

- KEYED NOTES FOR NEW CONSTRUCTION**
- 100 PORTLAND CEMENT CONCRETE SIDEWALK - 5 INCH THICKNESS
 - 101 COMBINATION CURB AND GUTTER - B6:24
 - 102 PORTLAND CEMENT CONCRETE DRIVEWAY - 6 INCH THICKNESS
 - 103 RED PORTLAND CEMENT CONCRETE BRICK STAMPED SIDEWALK - 6 INCH THICKNESS
 - 104 PORTLAND CEMENT CONCRETE RAMP WITH DETECTABLE WARNING SURFACE
 - 105 2-INCH DIAMETER PVC ELECTRICAL CONDUIT
 - 106 INLET / MANHOLE RECONSTRUCTION / ADJUSTMENT
 - 107 12-INCH DIAMETER STORM SEWER
 - 108 UTILITY ADJUSTMENT
 - 109 PROVIDE INLET EROSION CONTROL AT THIS OR FIRST DOWNSTREAM INLET/MANHOLE
 - 110 PROVIDE AGGREGATE BASE COURSE CA6 - VARIABLE THICKNESS BETWEEN SUBGRADE AND BOTTOM OF NEW CONCRETE
 - 111 PORTLAND CEMENT CONCRETE PAVEMENT - 10 INCH THICKNESS

- KEYED NOTES FOR DEMOLITION**
- 1 PORTLAND CEMENT CONCRETE SIDEWALK REMOVAL
 - 2 PORTLAND CEMENT CONCRETE / ASPHALT DRIVEWAY REMOVAL
 - 3 CURB, CURB AND GUTTER REMOVAL
 - 4 INLET / MANHOLE REMOVAL
 - 5 EXCAVATE TO PROPOSED SUBGRADE ELEVATION

| REVISIONS | | ILLINOIS DEPARTMENT OF TRANSPORTATION 2008 STREETSCAPE IMPROVEMENT PROJECT CITY OF PARIS, ILLINOIS |
|--|--------------|--|
| NAME | DATE | |
| | | STREETSCAPE PLAN MADISON STREET |
| | | |
| | | |
| | | |
| | | |
| SCALE: 1 IN. = 10 FT. DRAWN BY: SDS | | DATE: 101207 DESIGNED BY: MCG/ELC |
| © 2007 ALL RIGHTS RESERVED BERNS, CUNY AND ASSOCIATES, P.C. | | |
| JOB: 5556-12 | DATE: 101207 | SHEET 23 OF 28 |
| FILE: 5556-S23.DWG | | |

MATCHLINE - STA. 7+15.8 SEE SHEET 25