


PAVEMENT CROSS - SECTION (2 LANES)

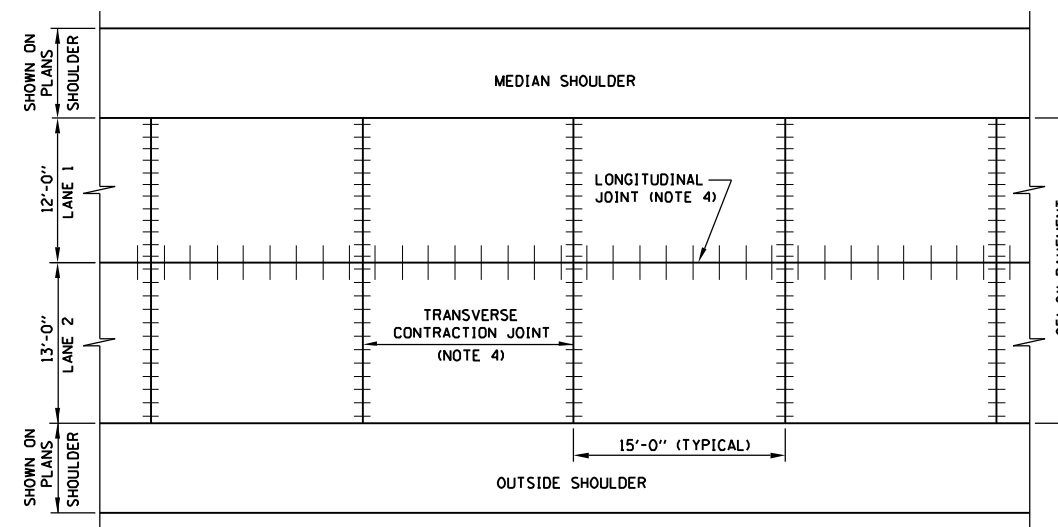

PAVEMENT PLAN
2 - LANE SECTION

GENERAL NOTES:

1. DOWEL BASKET ASSEMBLIES, WHERE USED, SHALL BE SUPPORTED AND ANCHORED IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS.
2. WHEN ADJACENT LANES ARE NOT BUILT IN ONE OPERATION, A LONGITUDINAL JOINT SHALL BE REPLACED WITH BULKHEAD LONGITUDINAL JOINT.
3. MATERIALS ARE PROJECT SPECIFIC. REFER TO PROJECT PLANS AND CONTRACT DOCUMENTS FOR DETAILS.
4. SEE STANDARD A7 (PAVEMENT JOINTS) AND IDOT STANDARD 420001 (PAVEMENT JOINTS) FOR DETAILS OF JOINTS AND TIE BARS NOT SHOWN.
5. PAVEMENT DESIGNS ARE PROJECT SPECIFIC, OTHER MATERIALS MAY BE SUBSTITUTED FOR HOT-MIX ASPHALT BASE COURSE AND SUBGRADE AGGREGATE. REFER TO PROJECTS PLANS FOR DETAILS AND MATERIAL THICKNESS.

CONTRACT 60I31 SHEET 878 OF 963
SHEET 1 OF 2



DATE	REVISIONS
5-1-2009	DELETED BLOCK-OUTS DETAIL, REMOVED SHOULDER DIMENSIONS

J.P.C. PAVEMENT
12" OR LESS

STANDARD A5-01

APPROVED *Paul Kovacs* DATE 5-1-2009
CHIEF ENGINEER