F.A. SECTION COUNTY TOTAL SHEETS NO.


709 105BR-5 CHAMPAIGN 31 10C

CONTRACT 90933


PARTIAL DEPTH REMOVAL (X4401705)

## PCC PARTIAL DEPTH HOT-MIX ASPHALT PATCHING

## RESURFACED PCC PAVEMENT

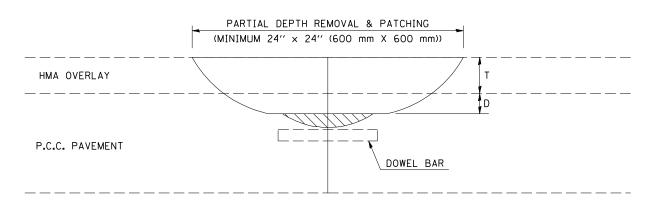

## BARE PCC PAVEMENT

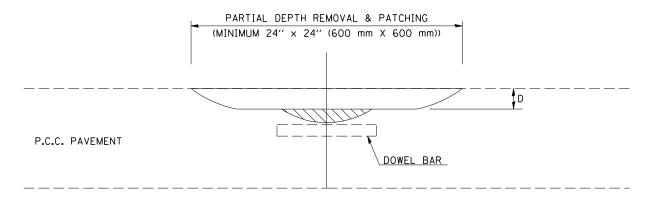

	NAME	DATE	REVISIONS	
DESIGNED	T.J.B.	08/06	NAME	DATE
CHECKED				
CADD NO.	X4421000			

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

## GENERAL NOTES

AIR EQUIPMENT

OR MECHANICAL

SWEEPER REMOVAL OF LOOSE AND/OR

UNSOUND CONCRETE

MILL MACHINE

AND/OR WHEEL

SAW REMOVAL

ALL VOLUME OF PARTIAL DEPTH REMOVAL SHALL BE REPLACED WITH HOT-MIX ASPHALT (HMA) AND PAID FOR AT THE CONTRACT UNIT PRICE PER TON FOR PARTIAL DEPTH PATCHING.

T = THICKNESS OF HMA OVERLAY(S). SEE EXISTING TYPICAL CROSS SECTION.

GENERAL NOTE 406H SHALL INCLUDE MIXTURE REQUIREMENTS FOR PARTIAL DEPTH PATCHING.

HMA REPLACEMENT IN RESURFACED PCC PAVEMENT LOCATIONS SHALL BE ACCORDING TO SECTION 406 OF THE STANDARD SPECIFICATIONS.

D = DEPTH OF PARTIAL DEPTH REMOVAL INTO EXISTING PCC PAVEMENT. ( 3" ( 75 mm)  $\pm$  OR TO SOUND CONCRETE)

TRANSVERSE CONTRACTION JOINT SHOWN - OTHER LOCATIONS SIMILAR.