


FAP ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
	05-00016-03-BR	MADISON	129	46
STA.	TO STA.			
CONTRACT NO.: 97351				

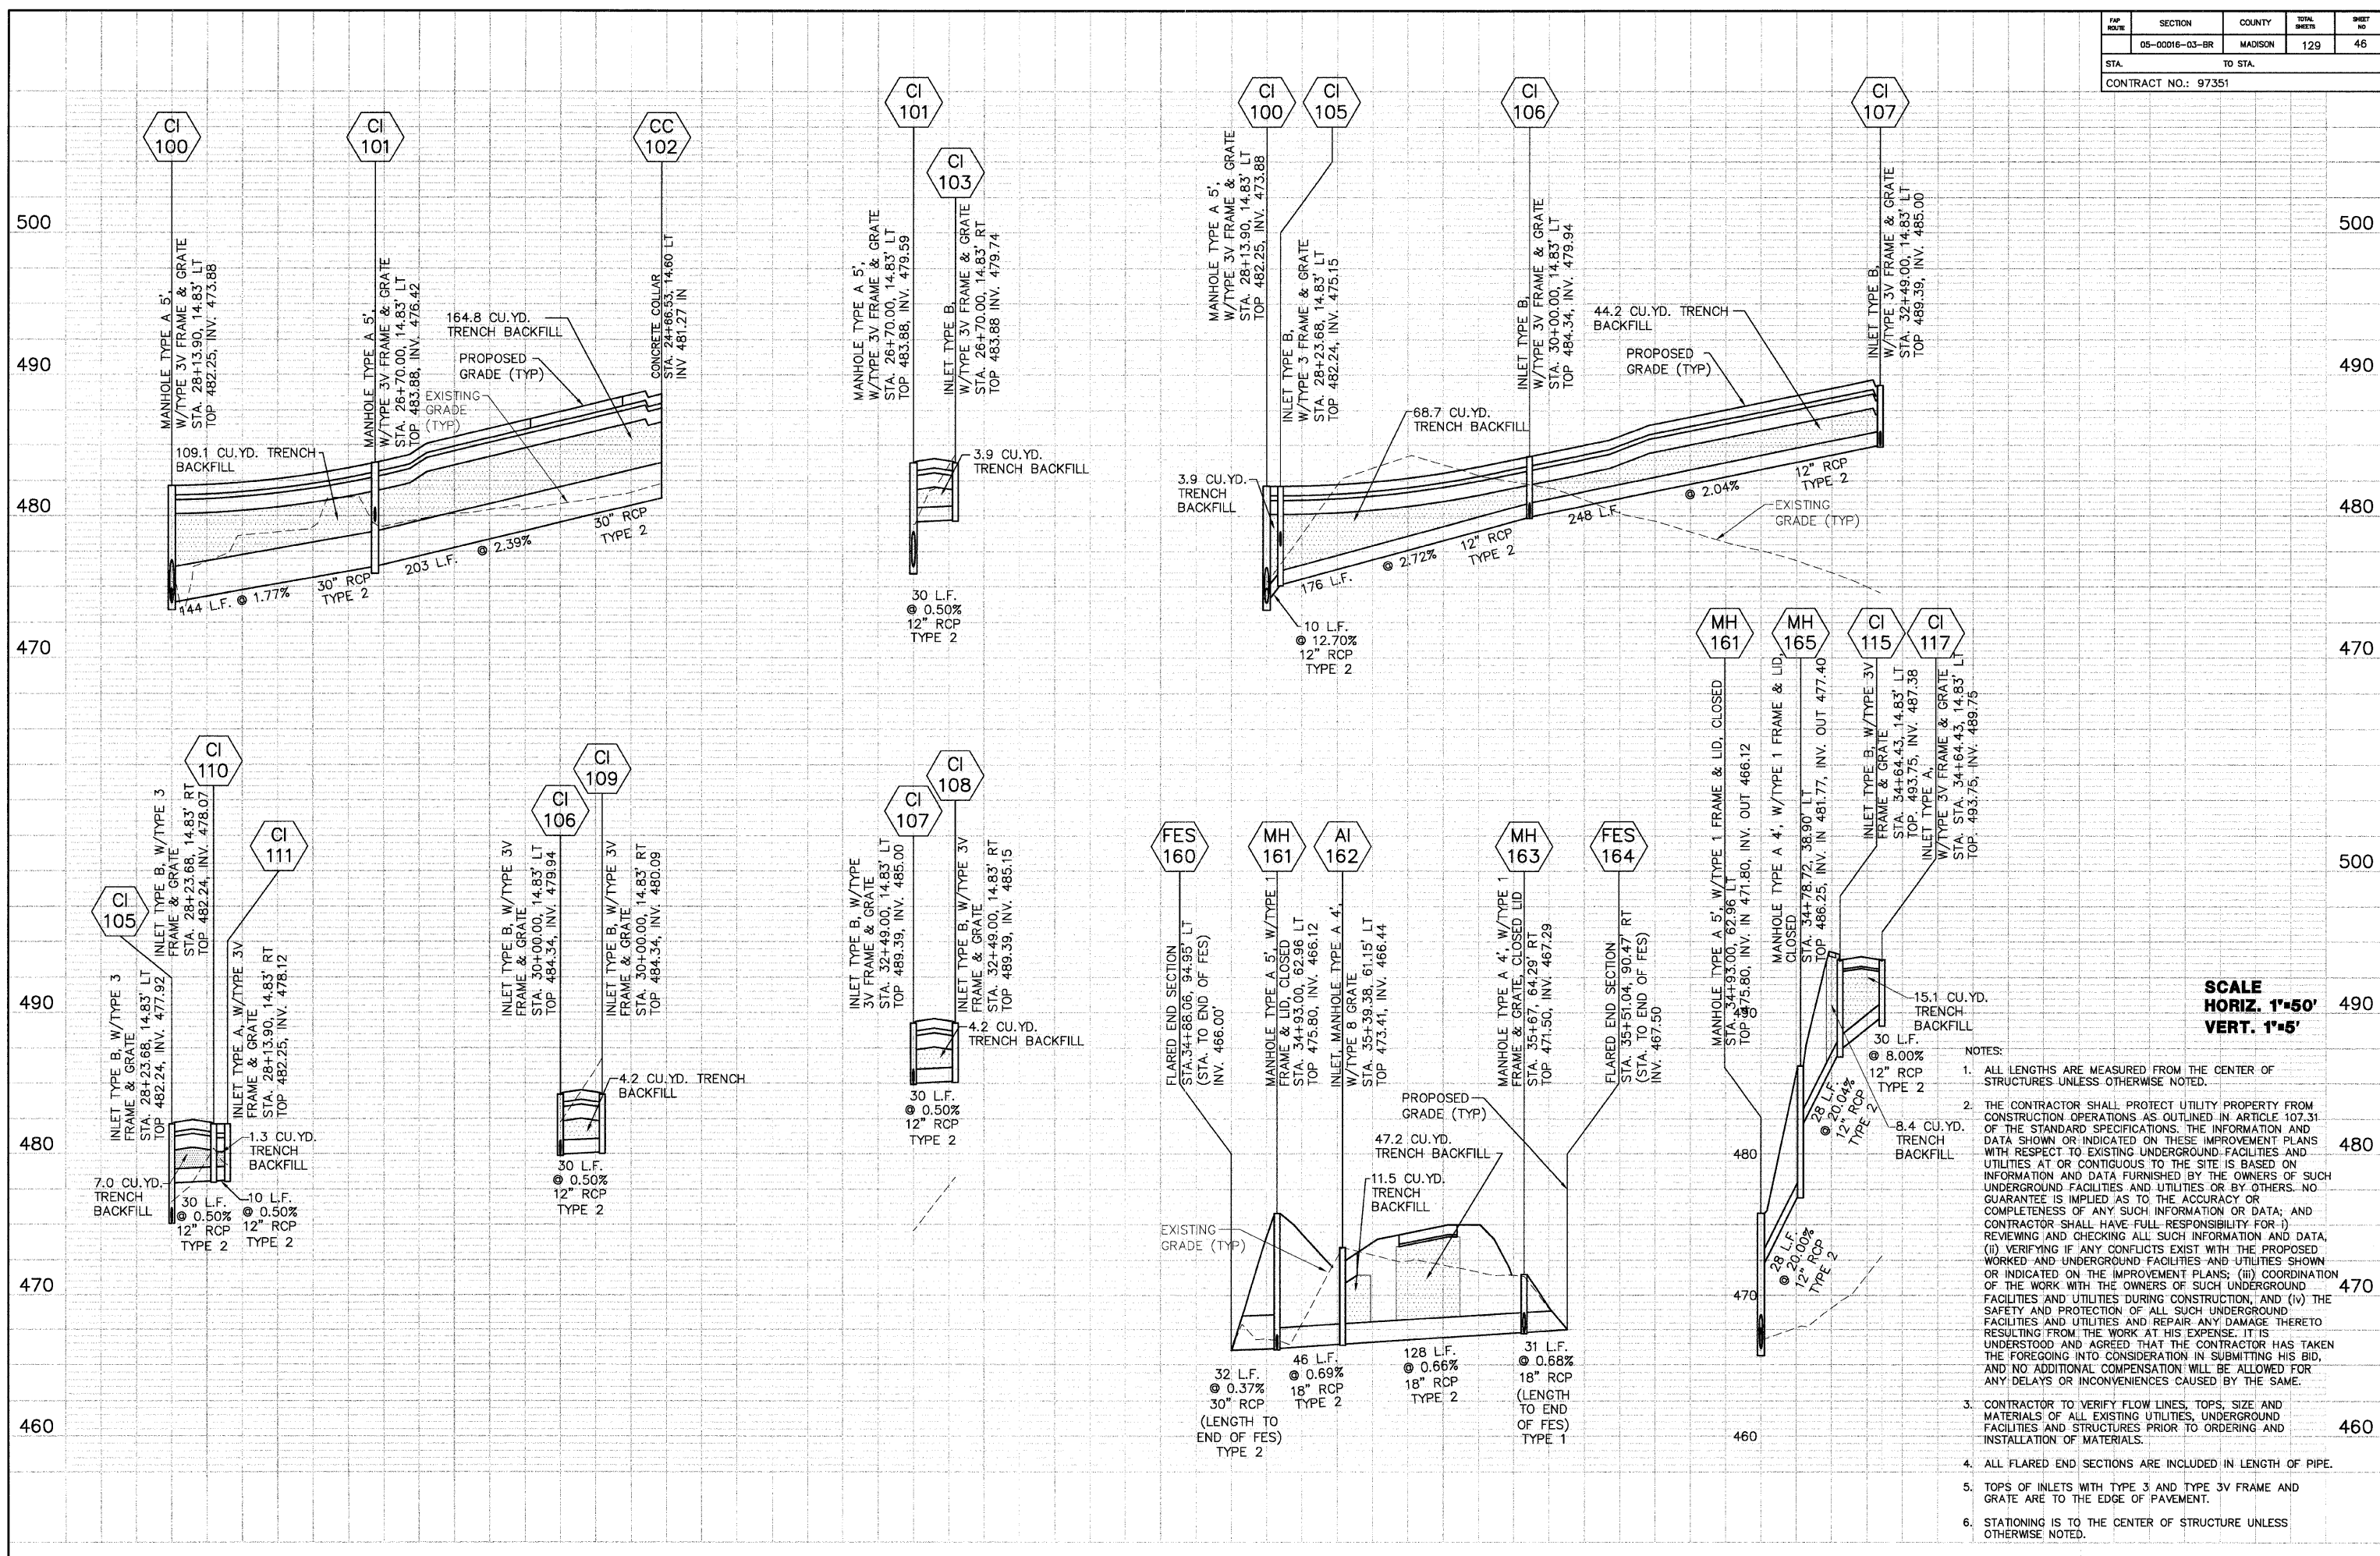

PROFILE	SURVEYED	DATE
PLOTTED	BY	DATE
NOTE BOOK	RECORDED	BY
NO.	STRUCTURE NOTATIONS CHECKED	BY

SCALE
HORIZ. 1"=50'
VERT. 1"=5'

- NOTES:
1. ALL LENGTHS ARE MEASURED FROM THE CENTER OF STRUCTURES UNLESS OTHERWISE NOTED.
 2. THE CONTRACTOR SHALL PROTECT UTILITY PROPERTY FROM CONSTRUCTION OPERATIONS AS OUTLINED IN ARTICLE 107.31 OF THE STANDARD SPECIFICATIONS. THE INFORMATION AND DATA SHOWN OR INDICATED ON THESE IMPROVEMENT PLANS WITH RESPECT TO EXISTING UNDERGROUND FACILITIES AND UTILITIES AT OR CONTIGUOUS TO THE SITE IS BASED ON INFORMATION AND DATA FURNISHED BY THE OWNERS OF SUCH UNDERGROUND FACILITIES AND UTILITIES OR BY OTHERS. NO GUARANTEE IS IMPLIED AS TO THE ACCURACY OR COMPLETENESS OF ANY SUCH INFORMATION OR DATA; AND CONTRACTOR SHALL HAVE FULL RESPONSIBILITY FOR: (i) REVIEWING AND CHECKING ALL SUCH INFORMATION AND DATA, (ii) VERIFYING IF ANY CONFLICTS EXIST WITH THE PROPOSED WORKED AND UNDERGROUND FACILITIES AND UTILITIES SHOWN OR INDICATED ON THE IMPROVEMENT PLANS; (iii) COORDINATION OF THE WORK WITH THE OWNERS OF SUCH UNDERGROUND FACILITIES AND UTILITIES DURING CONSTRUCTION, AND (iv) THE SAFETY AND PROTECTION OF ALL SUCH UNDERGROUND FACILITIES AND UTILITIES AND REPAIR ANY DAMAGE THERETO RESULTING FROM THE WORK AT HIS EXPENSE. IT IS UNDERSTOOD AND AGREED THAT THE CONTRACTOR HAS TAKEN THE FOREGOING INTO CONSIDERATION IN SUBMITTING HIS BID, AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED FOR ANY DELAYS OR INCONVENIENCES CAUSED BY THE SAME.
 3. CONTRACTOR TO VERIFY FLOW LINES, TOPS, SIZE AND MATERIALS OF ALL EXISTING UTILITIES, UNDERGROUND FACILITIES AND STRUCTURES PRIOR TO ORDERING AND INSTALLATION OF MATERIALS.
 4. ALL FLARED END SECTIONS ARE INCLUDED IN LENGTH OF PIPE.
 5. TOPS OF INLETS WITH TYPE 3 AND TYPE 3V FRAME AND GRATE ARE TO THE EDGE OF PAVEMENT.
 6. STATIONING IS TO THE CENTER OF STRUCTURE UNLESS OTHERWISE NOTED.