



Notes:
 Approach slab and sidewalk concrete shall be paid for as Concrete Superstructure.
 Approach footing concrete shall be paid for as Concrete Structures.
 Reinforcement shall be paid for as Reinforcement Bars, Epoxy Coated.
 The approach footing maximum applied service bearing pressure (Qmax) = 2.0 ksf.
 For bar splicer details, see Sheet No. 31.
 Cost of excavation for approach footing included with Concrete Structures.

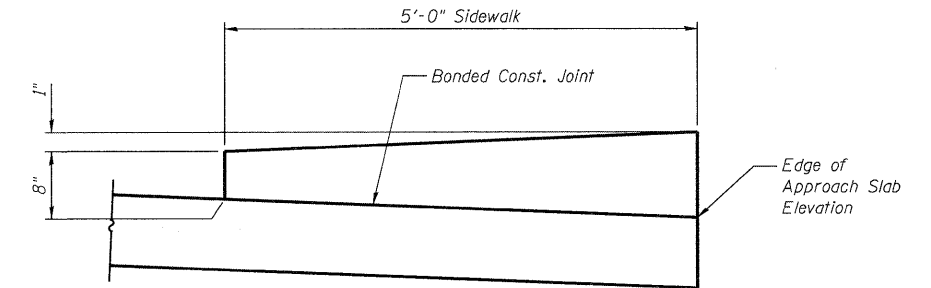

TYPICAL SIDEWALK DETAIL

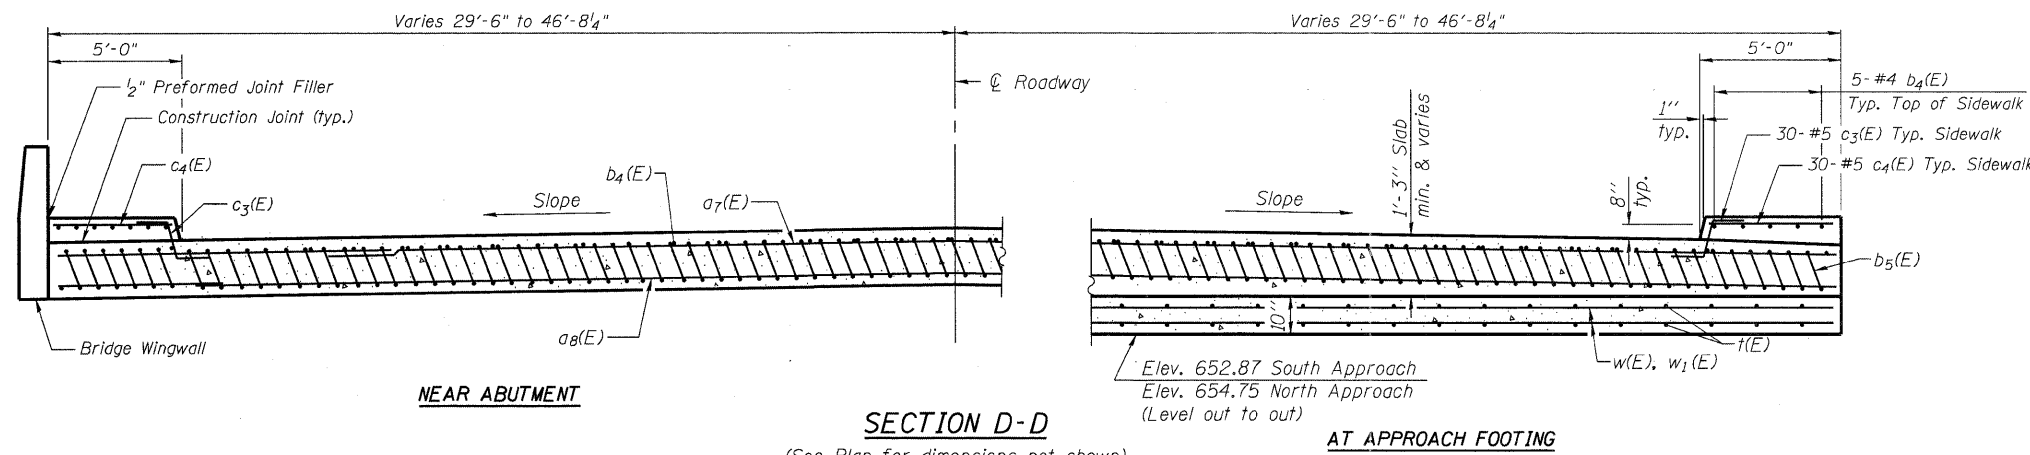


NEAR ABUTMENT

SECTION D-D


(See Plan for dimensions not shown)

AT APPROACH FOOTING

- * Tilt #9 bars as required to maintain clearance.
- ** Cut length of bars in field to provide 24" extension beyond b5 bar.
- *** Cost included with Concrete Superstructure.

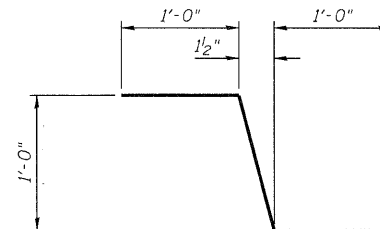

BAR c3(E)

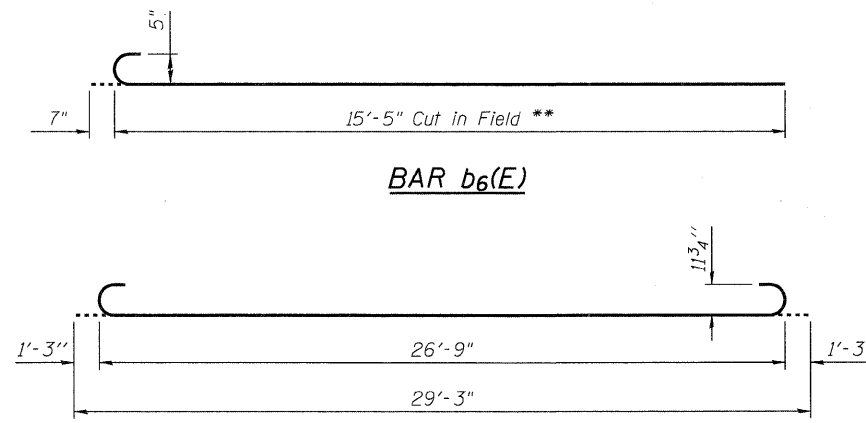


BAR b6(E)

BAR b5(E)

**TWO APPROACHES
BILL OF MATERIAL**

Bar	No.	Size	Length	Shape
a7(E)	138	#4	26'-10"	—
a8(E)	172	#5	39'-3"	—
b4(E)	120	#4	29'-6"	—
b5(E)	300	#9	29'-3"	—
b6(E)	120	#5	16'-0"	—
c3(E)	120	#5	3'-0"	—
c4(E)	120	#5	4'-7"	—
f(E)	160	#4	9'-8"	—
w(E)	160	#5	34'-3"	—
w1(E)	80	#5	10'-0"	—
Concrete Superstructure			Cu. Yd.	205.9
Concrete Structures			Cu. Yd.	47.0
Reinforcement Bars, Epoxy Coated			Pound	51,800

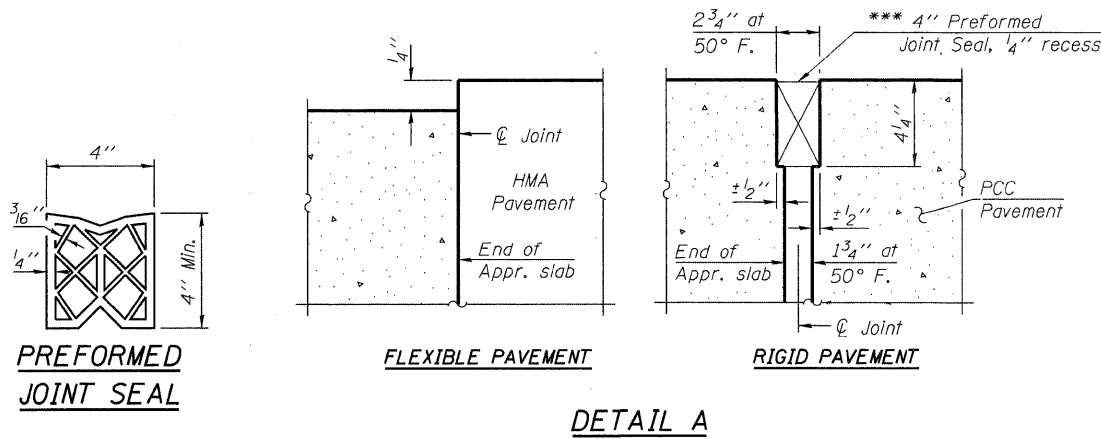

**PREFORMED
JOINT SEAL**

FLEXIBLE PAVEMENT

RIGID PAVEMENT

DETAIL A