

INDEX OF SHEETS	DESCRIPTION
1	TITLE
2	GENERAL NOTES, STANDARDS
3-3A	SUMMARY OF QUANTITIES
4-5	TYPICAL SECTIONS
6-11	PROPOSED ROADWAY PLANS
12-17	PAVEMENT MARKING PLANS
18-29	DISTRICT ONE DETAILS
30	CITY OF NAPERVILLE VALVE VAULT DETAIL
30A	PAVEMENT CORE MEASUREMENTS


1-20-2012 LETTING ITEM 072 STATE OF ILLINOIS

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0082	11-00149-00-RS	WILL	30	1

CONTRACT NO. 63659

DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS PLANS FOR PROPOSED FEDERAL AID HIGHWAY

**FAU ROUTE 0082 (BOOK ROAD)
111TH STREET TO 87TH STREET
RESURFACING
SECTION 11-00149-00-RS
PROJECT NO. M-9003(831)
CITY OF NAPERVILLE
WILL COUNTY
JOB NO: C-91-576-11**

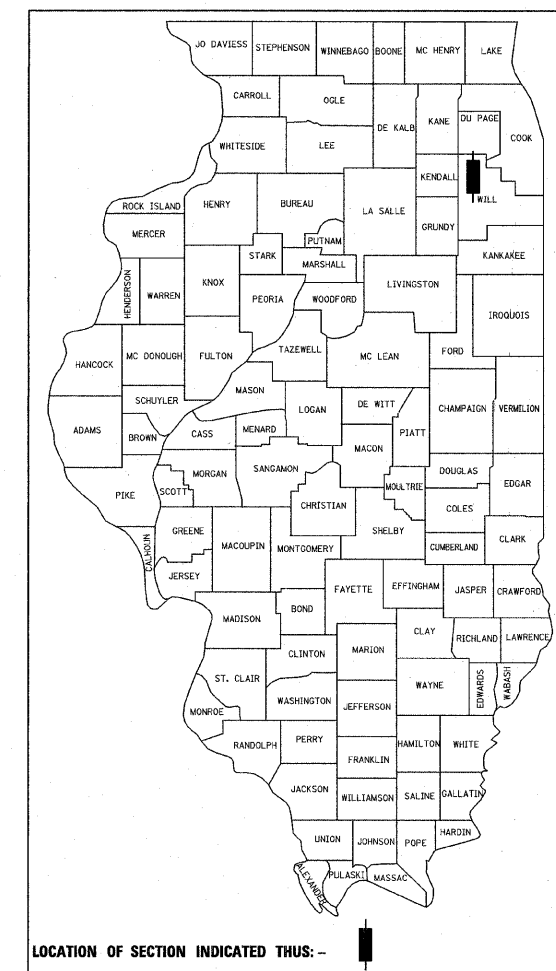


DESIGN DESIGNATION

24500 (32) MINOR ARTERIAL 4.3 (FD-20)
ADT (2030) ADT = 24,000

TRAFFIC DATA


FROM 111-TH STREET TO CONAN DOYLE ROAD:
ADT (2006 /2007) = 15,600
FROM CONAN DOYLE ROAD TO 87-TH STREET:
ADT (2006 /2007) = 21,500
POSTED SPEED = 40 MPH

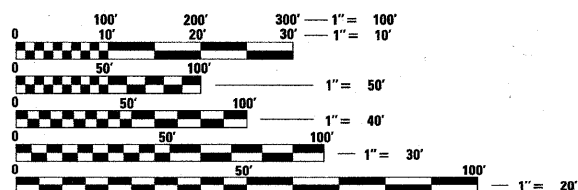

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123 OR 811

CONTRACT NO. 63659

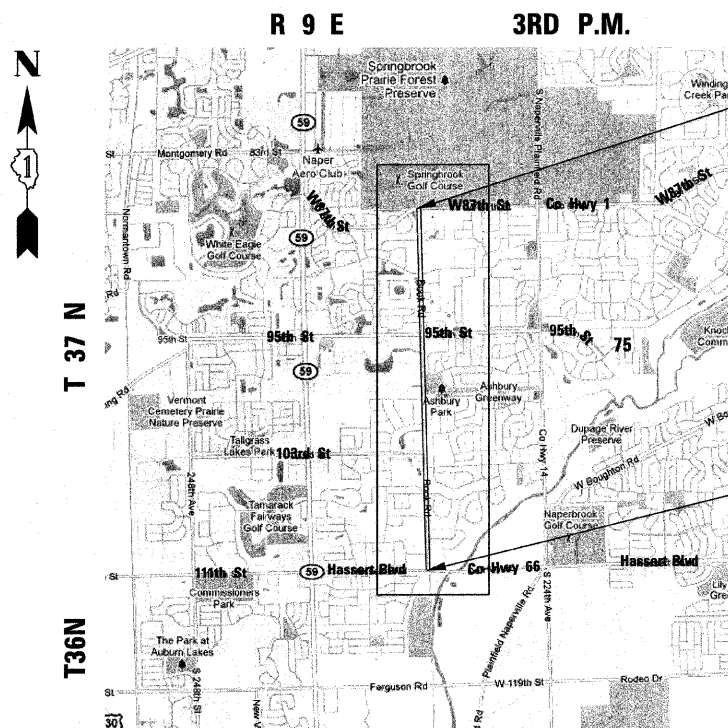

LOCATION MAP
NOT TO SCALE

GROSS LENGTH = 16,192.30 FT (3.07 MILES)
NET LENGTH = 16,132.29 FT
(60.01 FT OMISSION AT 95TH STREET)

PROJECT ENDS
STATION 172 + 22.30

PROJECT BEGINS
STATION 10 + 30.00



DATE: 10/18/11
Express 11/30/11

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

Approved October 12 20 11
William J. Tranel
CITY OF NAPERVILLE, CITY ENGINEER

Passed November 1 20 11
Cheryl Chamberlaine
DISTRICT 1 ENGINEER OF LOCAL ROADS AND STREETS

Releasing for Bid
Based on Limited
Review NOVEMBER 2, 20 11
Diane M. O'Keefe
DEPUTY DIRECTOR OF HIGHWAYS, REGION 1 ENGINEER

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

PLANS PREPARED BY:

URS 100 S. WACKER DR., SUITE 500 TEL (312)-939-1000
CHICAGO IL, 60606 FAX (312)-939-4198

PROGRAM AND OFFICE ENGINEER: CHARLES F. RIDDLE, P.E. 847-705-4406 SCHAUMBURG, IL

GENERAL NOTES

SPECIFICATIONS, STANDARDS AND SPECIAL PROVISIONS:

ALL CONSTRUCTION SHALL BE PERFORMED IN ACCORDANCE WITH THE ILLINOIS DEPARTMENT OF TRANSPORTATION "STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION", ADOPTED JANUARY 1, 2012. (HEREINAFTER REFERRED TO AS THE STANDARD SPECIFICATIONS); THE "SUPPLEMENTAL SPECIFICATIONS AND RECURRING SPECIAL PROVISIONS", ADOPTED JANUARY 1, 2012; THE LATEST EDITION OF THE "ILLINOIS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS"; THE "DETAILS" ON THE PLANS AND THE "SPECIAL PROVISIONS" INCLUDED IN THE CONTRACT DOCUMENTS. ANY REFERENCE TO STANDARDS THROUGHOUT THE PLANS OR SPECIAL PROVISIONS SHALL BE INTERPRETED AS THE LATEST STANDARD OF THE ILLINOIS DEPARTMENT OF TRANSPORTATION.

PROJECT COORDINATION:

THE CONTRACTOR SHALL NOTIFY THE ENGINEER AT LEAST 72 HOURS IN ADVANCE OF BEGINNING WORK AND SHALL COORDINATE ALL CONSTRUCTION OPERATIONS WITH THE ENGINEER. ATTENTION IS CALLED TO SECTION 701 OF THE STANDARD SPECIFICATIONS AND THE SPECIAL PROVISIONS FOR TRAFFIC CONTROL AND PROTECTION. THE STORAGE OF EQUIPMENT AND/OR MATERIALS WITHIN THE RIGHT-OF-WAY SHALL REQUIRE PRIOR WRITTEN APPROVAL OF THE ENGINEER.

SAFETY:

PER ARTICLE 701.12 OF THE STANDARD SPECIFICATIONS, ALL CONSTRUCTION PERSONNEL SHALL BE REQUIRED TO WEAR FLUORESCENT SAFETY VESTS OF THE SPECIFIED COLOR/S AT ALL TIMES WHILE ON THE CONSTRUCTION SITE.

TRAFFIC CONTROL AND MAINTENANCE:

THE CONTRACTOR SHALL SCHEDULE HIS WORK SO THAT ONLY ONE TEMPORARY LANE CLOSURE IN EACH DIRECTION IS IMPLEMENTED AT A TIME. A LANE CLOSURE WILL ONLY BE PERMITTED DURING CONSTRUCTION OPERATIONS AND IN ACCORDANCE WITH THE APPLICABLE IDOT STANDARD. THE CONTRACTOR SHALL FURNISH, ERECT, AND MAINTAIN ALL SIGNS, BARRICADES AND OTHER TRAFFIC CONTROL DEVICES INCLUDING FLAGGERS REQUIRED TO MAINTAIN TRAFFIC FLOW. THE CONTRACTOR SHALL SCHEDULE HIS WORK SO THAT NO HOLES IN THE PAVEMENT, AS DETERMINED BY THE ENGINEER, REMAIN OPEN OVER NIGHT. ACCESS TO ABUTTING PROPERTY SHALL BE PROVIDED AT ALL TIMES DURING CONSTRUCTION OF THIS PROJECT. TIME REQUIRED FOR CONSTRUCTION AT DRIVEWAYS SHALL BE LIMITED TO THE MINIMUM TIME REQUIRED FOR SAID CONSTRUCTION AND, IF REQUIRED, TEMPORARY AGGREGATE SURFACE FOR DRIVEWAY ACCESS SHALL BE PROVIDED.

PAVEMENT STRIPING:

BEFORE BEGINNING ANY WORK, THE CONTRACTOR SHALL RETAIN AND RECORD (FOR FUTURE REFERENCES) ALL EXISTING PAVEMENT MARKING LINES IN ORDER THAT THESE LOCATIONS CAN BE RE-ESTABLISHED FOR STRIPING. EXACT LOCATIONS OF ALL STRIPING SHALL BE AS DIRECTED BY THE ENGINEER.

SAW CUTTING FOR REMOVAL:

THE CONTRACTOR SHALL BE REQUIRED TO MAKE A FULL DEPTH SAW CUT AT THE EDGE OF PAVEMENT ADJACENT TO THE REMOVAL OF ALL CONCRETE CURB OR COMBINATION CONCRETE CURB AND GUTTER. THE CONTRACTOR SHALL MAKE ALL FULL DEPTH SAW CUTS REQUIRED FOR THE REMOVAL OF CONCRETE CURB AND GUTTERS, SIDEWALKS AND DRIVEWAYS AS SPECIFIED, OR AS DIRECTED BY THE ENGINEER. THE COST SHALL BE CONSIDERED INCLUDED IN THE COST FOR REMOVAL OF THE SPECIFIED ITEM IN THE CONTRACT.

BASE COURSE CLEANING:

PRIOR TO APPLYING THE BITUMINOUS PRIME COAT, THE BASE SURFACE INCLUDING GUTTERS SHALL BE CLEANED OF LOOSE GRINDINGS, LEAVES, OF ALL DUST, DIRT, WEEDS AND OTHER FOREIGN MATERIALS. ALL CRACK FILL MATERIAL SHALL BE REMOVED IN ITS ENTIRETY ALONG THE CURB LINE. COST TO BE CONSIDERED INCLUDED IN THE COST OF THE HOT-MIX ASPHALT SURFACE WORK.

BASE PATCHING AND REPAIR

PRIOR TO THE PLACEMENT OF PATCHES FOR BASE REPAIR, THE SUBGRADE SHALL BE INSPECTED BY THE ENGINEER. IF ADDITIONAL SUBBASE REPAIR IS NECESSARY, THE AREA SHALL BE UNDERCUT AND BACKFILLED WITH P.G.E. SUBGRADE MATERIAL AS APPROVED BY THE ENGINEER.

CLEAN-UP AND DISPOSAL:

THE CONTRACTOR SHALL MAINTAIN THE SITE IN A CLEAN AND ORDERLY MANNER. DEBRIS AND ANY SURPLUS MATERIAL SHALL BE REMOVED AND RESTORATION SHALL PROCEED AS THE WORK PROCEEDS. IF THE ENGINEER SO DIRECTS, THE CONTRACTOR SHALL STOP ALL OTHER WORK AND CONCENTRATE ON CLEAN-UP AND RESTORATION. DEBRIS AND SURPLUS MATERIAL SHALL BE DISPOSED OF BY THE CONTRACTOR AT AN APPROVED OFF-SITE DISPOSAL AREA.

CONSTRUCTION LIMITS:

THE CONTRACTOR SHALL CONFINE OPERATIONS WITHIN THE DEDICATED ROADWAY RIGHTS-OF-WAY. ANY DAMAGE OUTSIDE OF RIGHTS-OF-WAY SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE.

LANDSCAPING RESTORATION:

ALL LANDSCAPING DAMAGED DURING CONSTRUCTION SHALL BE RESTORED WITH A MINIMUM OF 4" OF PULVERIZED TOP SOIL, SODDING, AND FERTILIZER NUTRIENTS.

CURB AND GUTTER REPLACEMENT:

THE MINIMUM THICKNESS OF THE PROPOSED GUTTER FLAG SHALL BE 10" UNLESS OTHERWISE STATED IN THE PLANS OR DIRECTED BY THE ENGINEER. DISTURBED PAVEMENT AND GROUND AREAS SHALL BE RESTORED IMMEDIATELY FOLLOWING REPLACEMENT OPERATIONS AND IN ALL CASES WITHIN THREE (3) WORKING DAYS FROM THE DATE THE CURB AND GUTTER WAS CAST. THE ENGINEER SHALL STOP THE CONTRACTOR FROM FURTHER REMOVAL OPERATIONS AT ANY TIME HE DETERMINES THE RESTORATION IS NOT BEING DONE IN A TIMELY MANNER. FAILURE TO COMPLY WITH THESE REQUIREMENTS SHALL RESULT IN THE ENFORCEMENT OF LIQUIDATED DAMAGES IN THE AMOUNT SPECIFIED IN ARTICLE 108.09 OF THE STANDARD SPECIFICATIONS.

REMOVAL OF EXISTING PAVEMENT AND APPURTENANCES

WHEN PORTIONS OF EXISTING PAVEMENTS OR APPURTENANCES ARE TO REMAIN IN PLACE, OR ADJACENT EXISTING PAVEMENTS OR APPURTENANCES ARE TO REMAIN IN PLACE, THE CONTRACTOR SHALL FORM A PERPENDICULAR STRAIGHT JOINT BY FULL-DEPTH MACHINE SAWING AT THE ENDS AND ALL EDGES OF PORTIONS TO BE REMOVED TO PREVENT SURFACE SPALLING WHEN THE EXISTING PAVEMENT OR APPURTENANCE IS REMOVED. ANY DAMAGE TO THE EXISTING PAVEMENT OR APPURTENANCE TO REMAIN IN PLACE SHALL BE REPAIRED OR REMOVED AND REPLACED BY THE CONTRACTOR AT HIS/HER OWN EXPENSE, AS DIRECTED BY THE ENGINEER. THIS WORK WILL NOT BE MEASURED FOR PAYMENT BUT SHALL BE CONSIDERED INCLUDED IN THE ITEM BEING REMOVED.

STATE STANDARDS

STANDARD NO.	DESCRIPTION
000001-06	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
424001-06	CURB RAMPS FOR SIDEWALKS
442201-03	CLASS C AND D PATCHES
606001-04	CONCRETE CURB TYPE B AND COMBINATION CONCRETE CURB AND GUTTER
701501-06	URBAN LANE CLOSURE, 2L, 2W UNDIVIDED
701701-08	URBAN LANE CLOSURE, MULTILANE INTERSECTION
701801-05	LANE CLOSURE MULTILANE 1W OR 2W CROSSWALK OR SIDEWALK CLOSURE
701901-02	TRAFFIC CONTROL DEVICES
780001-03	TYPICAL PAVEMENT MARKINGS
886001-01	DETECTOR LOOP INSTALLATIONS
886006-01	TYPICAL LAYOUTS FOR DETECTION LOOPS

DISTRICT 1 STANDARDS

STANDARD NO.	DESCRIPTION
BD-1	DRIVEWAY DETAILS-DISTANCE BETWEEN R.O.W. AND FACE OF CURB & EDGE OF SHOULDER >= 15'(4.5m)
BD-2	DRIVEWAY DETAILS - DISTANCE BETWEEN ROW AND FACE OF CURB < 15'(4.5m)
BD-8	FRAMES AND LIDS ADJUSTMENT WITH MILLING
BD-22	PAVEMENT PATCHING FOR HMA SURFACED PAVEMENT
BD-24	CURB OR CURB AND GUTTER REMOVAL AND REPLACEMENT
BD-32	BUTT JOINT AND HMA TAPER
TC-10	TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS
TC-13	DISTRICT ONE TYPICAL PAVEMENT MARKINGS
TC-14	TRAFFIC CONTROL AND PROTECTION AT TURN BAYS (TO REMAIN OPEN TO TRAFFIC)
TC-16	PAVEMENT MARKING LETTERS AND SYMBOLS FOR TRAFFIC STAGING
TC-22	ARTERIAL ROAD INFORMATION SIGN
TS-07	DETECTOR LOOP INSTALLATION DETAILS FOR ROADWAY RESURFACING

FILE NAME = D:\naperv\11e_28567854_Backup\Drawings\General\GenNotes.dgn



USER NAME = #USER1#	DESIGNED - EVI	REVISED -
PLOT SCALE = 5/8"=1'-0"	DRAWN - KJB	REVISED -
PLOT DATE = 10/11/2011 3:31:42 PM	CHECKED - DAK	REVISED -
	DATE - 10/24/2011	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

GENERAL NOTES & STANDARDS

NTS SHEET NO. 1 OF 1 SHEETS STA. — TO STA. —

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0082	11-00149-00-RS	WILL	30	2
CONTRACT NO.			63659	
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

SUMMARY OF QUANTITIES

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	ROADWAY LAPP 0005
20201200	REMOVAL AND DISPOSAL OF UNSUITABLE MATERIAL	CU YD	110	110
21101615	TOPSOIL FURNISH AND PLACE, 4"	SQ YD	238	238
25000400	NITROGEN FERTILIZER NUTRIENT	POUND	3	3
25000500	PHOSPHORUS FERTILIZER NUTRIENT	POUND	3	3
25000600	POTASSIUM FERTILIZER NUTRIENT	POUND	3	3
25200110	SODDING, SALT TOLERANT	SQ YD	238	238
35101500	AGGREGATE BASE COURSE, TYPE B	CU YD	13	13
35501308	HOT-MIX ASPHALT BASE COURSE, 6"	SQ YD	2	2
35501316	HOT-MIX ASPHALT BASE COURSE, 8"	SQ YD	2	2
40201000	AGGREGATE FOR TEMPORARY ACCESS	TON	50	50
40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	12,914	12,914
40600300	AGGREGATE (PRIME COAT)	TON	258	258
40600400	MIXTURE FOR CRACKS, JOINTS, AND FLANGEWAYS	TON	15	15
40600827	POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50	TON	2,712	2,712
40600895	CONSTRUCTING TEST STRIP	EACH	1	1
40600982	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SQ YD	913	913
40601005	HOT-MIX ASPHALT REPLACEMENT OVER PATCHES	TON	215	215
40603335	HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50	TON	1	1
40603595	POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90	TON	6,328	6,328
42300200	PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 6 INCH	SQ YD	2	2

* = SPECIALTY ITEM

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	ROADWAY LAPP 0005
42300400	PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 8 INCH	SQ YD	2	2
42400200	PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH	SQ FT	2,039	2,039
42400800	DETECTABLE WARNINGS	SQ FT	442	442
44000159	HOT-MIX ASPHALT SURFACE REMOVAL, 2 1/2"	SQ YD	63,657	63,657
44000161	HOT-MIX ASPHALT SURFACE REMOVAL, 3"	SQ YD	2	2
44000200	DRIVEWAY PAVEMENT REMOVAL	SQ YD	5.4	5.4
44000500	COMBINATION CURB AND GUTTER REMOVAL	FOOT	256	256
44000600	SIDEWALK REMOVAL	SQ FT	2,000	2,000
44002224	HOT-MIX ASPHALT REMOVAL OVER PATCHES, 6"	SQ YD	640	640
44201713	CLASS D PATCHES, TYPE I, 6 INCH	SQ YD	160	160
44201717	CLASS D PATCHES, TYPE II, 6 INCH	SQ YD	160	160
44201721	CLASS D PATCHES, TYPE III, 6 INCH	SQ YD	160	160
44201723	CLASS D PATCHES, TYPE IV, 6 INCH	SQ YD	160	160
48101200	AGGREGATE SHOULDERS, TYPE B	TON	30	30
60603800	COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12	FOOT	233	233
60604400	COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.18	FOOT	16	16
60605000	COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24	FOOT	7	7
67100100	MOBILIZATION	L SUM	1	1
70102620	TRAFFIC CONTROL AND PROTECTION, STANDARD 701501	L SUM	1	1
70102635	TRAFFIC CONTROL AND PROTECTION, STANDARD 701701	L SUM	1	1

(1) = INCLUDES REMOVAL

FILE NAME - D:\naperv\11e_253678E4_Book1\APP\Roadway\Drawings\Quant\Summary\S00.dgn



USER NAME = #USER*	DESIGNED - EVI	REVISED -
PLOT SCALE = 50.0000' / 1" IN.	DRAWN - KJB	REVISED -
PLOT DATE = 11/29/2011 10:18:43 AM	CHECKED - DAK	REVISED -
	DATE - 10/24/2011	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUMMARY OF QUANTITIES

NTS SHEET NO. 1 OF 2 SHEETS STA. — TO STA. —

F.A.U. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 3
FED. ROAD DIST. NO. 1 ILLINOIS			CONTRACT NO. 63659	

SUMMARY OF QUANTITIES

70102640	TRAFFIC CONTROL AND PROTECTION, STANDARD 701801	L SUM	1	1
70106800	CHANGEABLE MESSAGE SIGN	CAL MO	2	2
70300100	SHORT TERM PAVEMENT MARKING	FOOT	12,400 (1)	12,400 (1)
70300210	TEMPORARY PAVEMENT MARKING LETTERS AND SYMBOLS	SQ FT	2,278 (1)	2,278 (1)
70300220	TEMPORARY PAVEMENT MARKING - LINE 4"	FOOT	139,830 (1)	139,830 (1)
70300240	TEMPORARY PAVEMENT MARKING - LINE 6"	FOOT	11,232 (1)	11,232 (1)
70300260	TEMPORARY PAVEMENT MARKING - LINE 12"	FOOT	5,970 (1)	5,970 (1)
70300280	TEMPORARY PAVEMENT MARKING - LINE 24"	FOOT	814 (1)	814 (1)
* 78000100	THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS	SQ FT	1,139	1,139
* 78000200	THERMOPLASTIC PAVEMENT MARKING - LINE 4"	FOOT	69,915	69,915
* 78000400	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	FOOT	5,616	5,616
* 78000600	THERMOPLASTIC PAVEMENT MARKING - LINE 12"	FOOT	2,985	2,985
* 78000650	THERMOPLASTIC PAVEMENT MARKING - LINE 24"	FOOT	407	407
* 88600600	DETECTOR LOOP REPLACEMENT	FOOT	1,163	1,163
X6030310	FRAMES AND LIDS TO BE ADJUSTED (SPECIAL)	EACH	9	9
Z0017400	DRAINAGE & UTILITY STRUCTURES TO BE ADJUSTED	EACH	8	8
Z0030850	TEMPORARY INFORMATION SIGNING	SQ FT	100	100
Z0042002	POROUS GRANULAR EMBANKMENT, SUBGRADE	CU YD	110	110

* = SPECIALTY ITEM

(1) = INCLUDES REMOVAL

FILE NAME = #FILE#




USER NAME = #USER#	DESIGNED - EVI	REVISED -
	DRAWN - KJB	REVISED -
PLOT SCALE = #SCALE#	CHECKED - DAK	REVISED -
PLOT DATE = #DATE#	DATE - 10/24/2011	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SUMMARY OF QUANTITIES


SHEET NO. 2 OF 2 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0082	11-00149-00-RS	WILL	30	3A
CONTRACT NO.			63659	
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

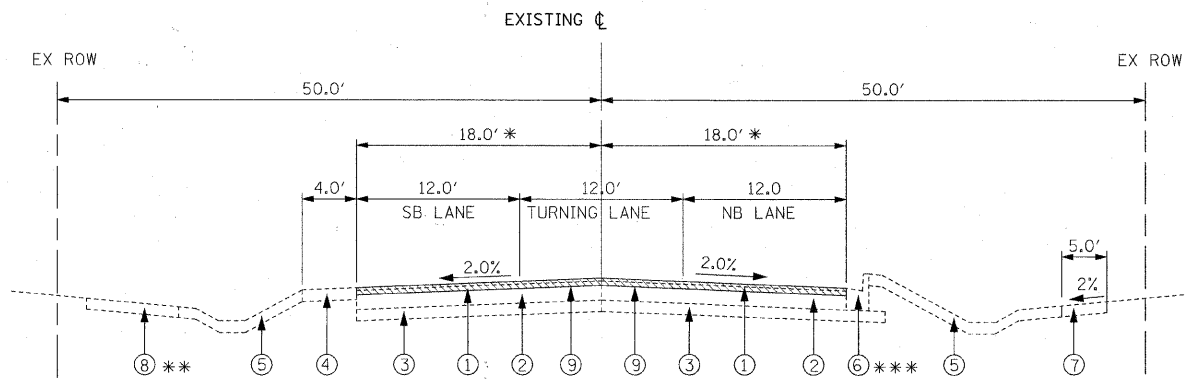

EXISTING TYPICAL SECTION NO. 1


BOOK ROAD
 STA 10+30.00 TO STA 64+05.81
 STA 95+86.92 TO STA 99+70.77
 STA 157+82.05 TO STA 172+22.30

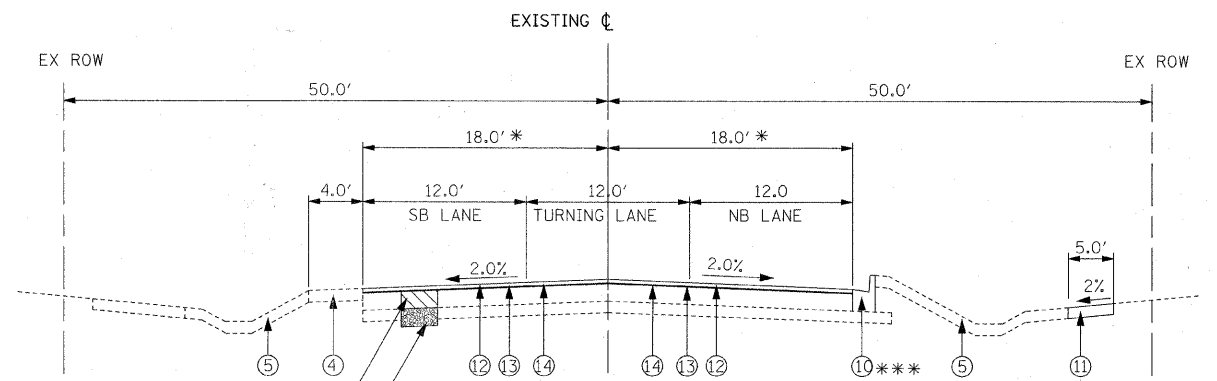

PROPOSED TYPICAL SECTION NO. 1


BOOK ROAD
 STA 10+30.00 TO STA 64+05.81
 STA 95+86.92 TO STA 99+70.77
 STA 157+82.05 TO STA 172+22.30

- * EXISTING PAVEMENT TAPERS:
 STA 64+05.81 TO STA 65+43.81 - 18.0' TO 12.0'
 STA 93+59.92 TO STA 95+86.92 - 12.0' TO 18.0'
 STA 99+70.77 TO STA 101+75.77 - 18.0' TO 12.0'
 STA 105+09.87 TO STA 106+54.87 - 12.0' TO 16.5'
 STA 146+37.37 TO STA 149+45.37 - 16.5' TO 12.0'
 STA 153+92.05 TO STA 157+82.05 - 12.0' TO 18.0'
- ** EXISTING SHARED USE TRAIL LOCATIONS:
 STA 90+00.0 TO STA 99+50.0
 STA 143+45.0 TO STA 172+00.0

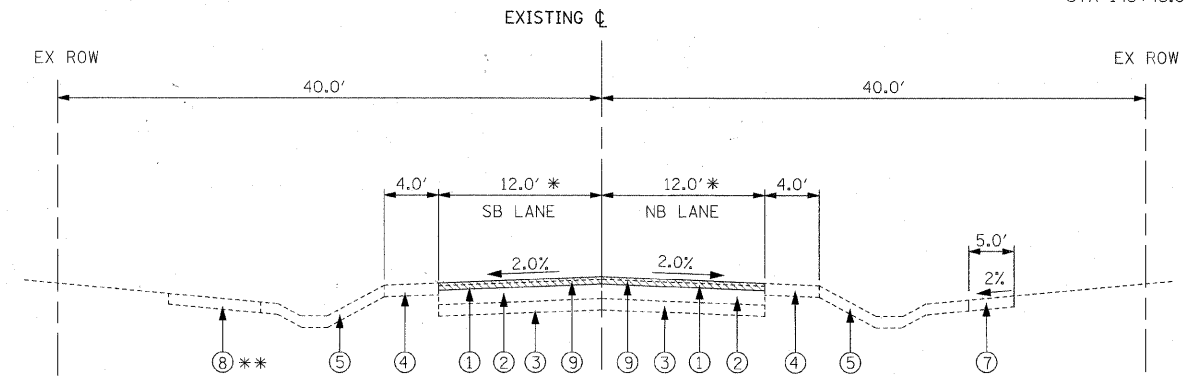

EXISTING TYPICAL SECTION NO. 2

BOOK ROAD
 STA 65+43.81 TO STA 93+59.92
 STA 101+75.77 TO STA 105+09.87
 STA 149+45.37 TO STA 153+92.05

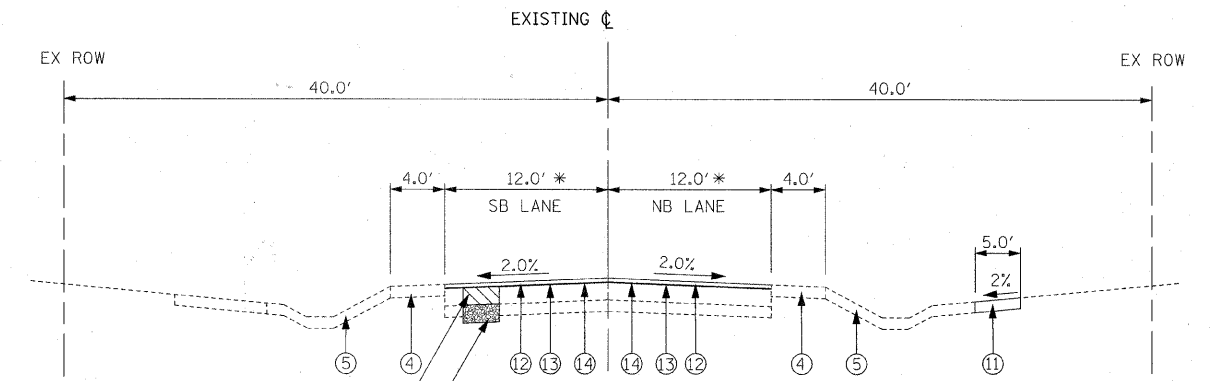

PROPOSED TYPICAL SECTION NO. 2

BOOK ROAD
 STA 65+43.81 TO STA 93+59.92
 STA 101+75.77 TO STA 105+09.87
 STA 149+45.37 TO STA 153+92.05

- *** EXISTING CURB AND GUTTER LOCATIONS:
 STA 56+80.0 TO STA 60+80.0 (RT)
 STA 106+54.9 TO STA 125+80.0 (LT/RT)
 STA 125+80.0 TO STA 127+10 (LT)
 STA 125+80.0 TO STA 135+60.0 (RT)
 STA 166+30.5 TO STA 172+33.2 (RT)

LEGEND

EXISTING:

- ① EXISTING HMA SURFACE COURSE, 2" AND HMA BINDER COURSE, 3"
- ② EXISTING BITUMINOUS BASE COURSE, 4"
- ③ EXISTING SUBBASE GRANULAR MATERIAL, TYPE B (CRUSHED), 6"
- ④ EXISTING AGGREGATE SHOULDER, TYPE B, 6"
- ⑤ EXISTING TOPSOIL
- ⑥ EXISTING COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12
- ⑦ EXISTING PCC SIDEWALK, 5"
- ⑧ EXISTING BITUMINOUS SHARED USE TRAIL

PROPOSED:

- ⑨ HMA SURFACE REMOVAL, 2-1/2" (44000159) (SEE EXISTING)
- ⑩ COMBINATION CONCRETE CURB & GUTTER, TYPE B-6.12 (60603800) AND COMBINATION CURB AND GUTTER REMOVAL (44000500) AS DIRECTED BY ENGINEER
- ⑪ PCC SIDEWALK 5" (42400200), WITH AGG. BASE COURSE, TYPE B 2" (35101500) AND SIDEWALK REMOVAL (44000600) AS DIRECTED BY ENGINEER
- ⑫ POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F" N90, 1 3/4" (40603595)
- ⑬ POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50, 3/4" (40600827)
- ⑭ BITUMINOUS MATERIALS (PRIME COAT) (40600100)

NOTE 1: CONTRACTOR SHALL PATCH BEFORE MILLING. SEE PATCHING DETAIL BD400-04 (BD-22) FOR INCLUDED ITEMS TO PATCHING COST AND FOR ADDITIONAL PATCHING DETAILS.

NOTE 2: AT LOCATIONS OF UNSUITABLE MATERIAL, AS DETERMINED BY THE ENGINEER, THE SUBGRADE TREATMENT SHALL CONSIST OF EXCAVATION OF UNSUITABLE MATERIAL TO A DEPTH OF 10 INCHES BELOW EXISTING PAVEMENT BASE AND PLACING POROUS GRANULAR EMBANKMENT SUBGRADE.

FILE NAME = #FILES#




USER NAME = #USER#	DESIGNED - EVI	REVISED -
PLOT SCALE = #SCALE#	DRAWN - KJB	REVISED -
PLOT DATE = #DATE#	CHECKED - DAK	REVISED -
	DATE - 10/24/2011	REVISED -

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**


TYPICAL SECTIONS	
BOOK ROAD (111TH STREET TO 87TH STREET)	
SCALE: N.T.S.	SHEET NO. 1 OF 2 SHEETS
STA. ---	TO STA. ---

F.A.U. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 4
FED. ROAD DIST. NO. 1 ILLINOIS			CONTRACT NO. 63659	

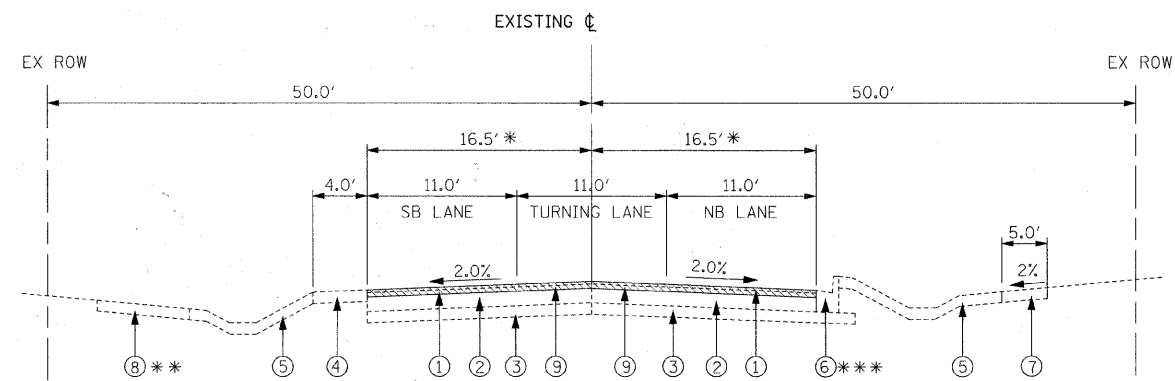

EXISTING TYPICAL SECTION NO. 3

BOOK ROAD
STA 106+54.87 TO STA 146+37.37

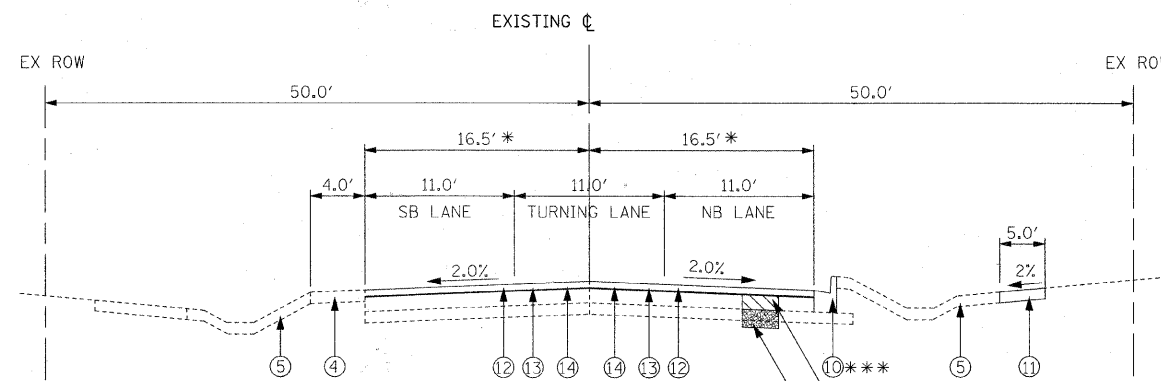

PROPOSED TYPICAL SECTION NO. 3

BOOK ROAD
STA 106+54.87 TO STA 146+37.37

- * EXISTING PAVEMENT TAPERS:
 STA 64+05.81 TO STA 65+43.81 - 18.0' TO 12.0'
 STA 93+59.92 TO STA 95+86.92 - 12.0' TO 18.0'
 STA 99+70.77 TO STA 101+75.77 - 18.0' TO 12.0'
 STA 105+09.87 TO STA 106+54.87 - 12.0' TO 16.5'
 STA 146+37.37 TO STA 149+45.37 - 16.5' TO 12.0'
 STA 153+92.05 TO STA 157+82.05 - 12.0' TO 18.0'
- ** EXISTING SHARED USE TRAIL LOCATIONS:
 STA 90+00.0 TO STA 99+50.0
 STA 143+45.0 TO STA 172+00.0
- *** EXISTING CURB AND GUTTER LOCATIONS:
 STA 56+80.0 TO STA 60+80.0 (RT)
 STA 106+54.9 TO STA 125+80.0 (LT/RT)
 STA 125+80.0 TO STA 127+10 (LT)
 STA 125+80.0 TO STA 135+60.0 (RT)
 STA 166+30.5 TO STA 172+33.2 (RT)

HOT-MIX ASPHALT MIXTURE REQUIREMENTS

MIXTURE TYPE	AIR VOIDS @ Ndes
POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90 (1 3/4")	4% @ 90 Gyr.
POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50, (3/4")	4% @ 50 Gyr.
CLASS D PATCHES (IN 3 LIFTS) (HMA BINDER IL-19 mm)	4% @ 70 Gyr.
HOT-MIX ASPHALT BASE COURSE 6" (IN 2 LIFTS)	4% @ 50 Gyr.
HOT-MIX ASPHALT REPLACEMENT OVER PATCHES (HMA BINDER IL-19mm)	4% @ 70 Gyr.
DRIVEWAYS: HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N50 (IL 9.5 mm); 3"	4% @ 50 Gyr.

THE UNIT WEIGHT USED TO CALCULATE ALL HOT-MIX ASPHALT SURFACE MIXTURE QUANTITIES IS 112 LBS/SQ YD/IN

THE "AC TYPE" FOR POLYMERIZED HMA MIXES SHALL BE "SBS/SBR PG 76-22" AND FOR NON-POLYMERIZED HMA THE "AC TYPE" SHALL BE "PG 64-22" UNLESS MODIFIED BY DISTRICT ONE SPECIAL PROVISIONS.

FOR "PERCENT OF RAP" SEE DISTRICT ONE SPECIAL PROVISIONS.

LEGEND

- EXISTING:
 - ① EXISTING HMA SURFACE COURSE, 2" AND HMA BINDER COURSE, 3"
 - ② EXISTING BITUMINOUS BASE COURSE, 4"
 - ③ EXISTING SUBBASE GRANULAR MATERIAL, TYPE B (CRUSHED), 6"
 - ④ EXISTING AGGREGATE SHOULDER, TYPE B, 6"
 - ⑤ EXISTING TOPSOIL
 - ⑥ EXISTING COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12
 - ⑦ EXISTING PCC SIDEWALK, 5"
 - ⑧ EXISTING BITUMINOUS SHARED USE TRAIL
- PROPOSED:
 - ⑨ HMA SURFACE REMOVAL, 2-1/2" (44000159) (SEE EXISTING)
 - ⑩ COMBINATION CONCRETE CURB & GUTTER, TYPE B-6.12 (60603800) AND COMBINATION CURB AND GUTTER REMOVAL (44000500) AS DIRECTED BY ENGINEER
 - ⑪ PCC SIDEWALK 5" (42400200), WITH AGG. BASE COURSE, TYPE B 2" (35101500) AND SIDEWALK REMOVAL (44000600) AS DIRECTED BY ENGINEER
 - ⑫ POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F" N90, 1 3/4" (40603595)
 - ⑬ POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50, 3/4" (40600827)
 - ⑭ BITUMINOUS MATERIALS (PRIME COAT) (40600100)

NOTE 1: CONTRACTOR SHALL PATCH BEFORE MILLING. SEE PATCHING DETAIL BD400-04 (BD-22) FOR INCLUDED ITEMS TO PATCHING COST AND FOR ADDITIONAL PATCHING DETAILS.

NOTE 2: AT LOCATIONS OF UNSUITABLE MATERIAL, AS DETERMINED BY THE ENGINEER, THE SUBGRADE TREATMENT SHALL CONSIST OF EXCAVATION OF UNSUITABLE MATERIAL TO A DEPTH OF 10 INCHES BELOW EXISTING PAVEMENT BASE AND PLACING POROUS GRANULAR EMBANKMENT SUBGRADE.

FILE NAME = 8FILES





USER NAME = #USER#	DESIGNED - EVI	REVISED -
	DRAWN - KJB	REVISED -
PLOT SCALE = #SCALE#	CHECKED - DAK	REVISED -
PLOT DATE = #DATE#	DATE - 10/24/2011	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS
BOOK ROAD (111TH STREET TO 87TH STREET)

SCALE: N.T.S. SHEET NO. 2 OF 2 SHEETS STA. — TO STA. —

F.A.U. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 5
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				CONTRACT NO. 63659

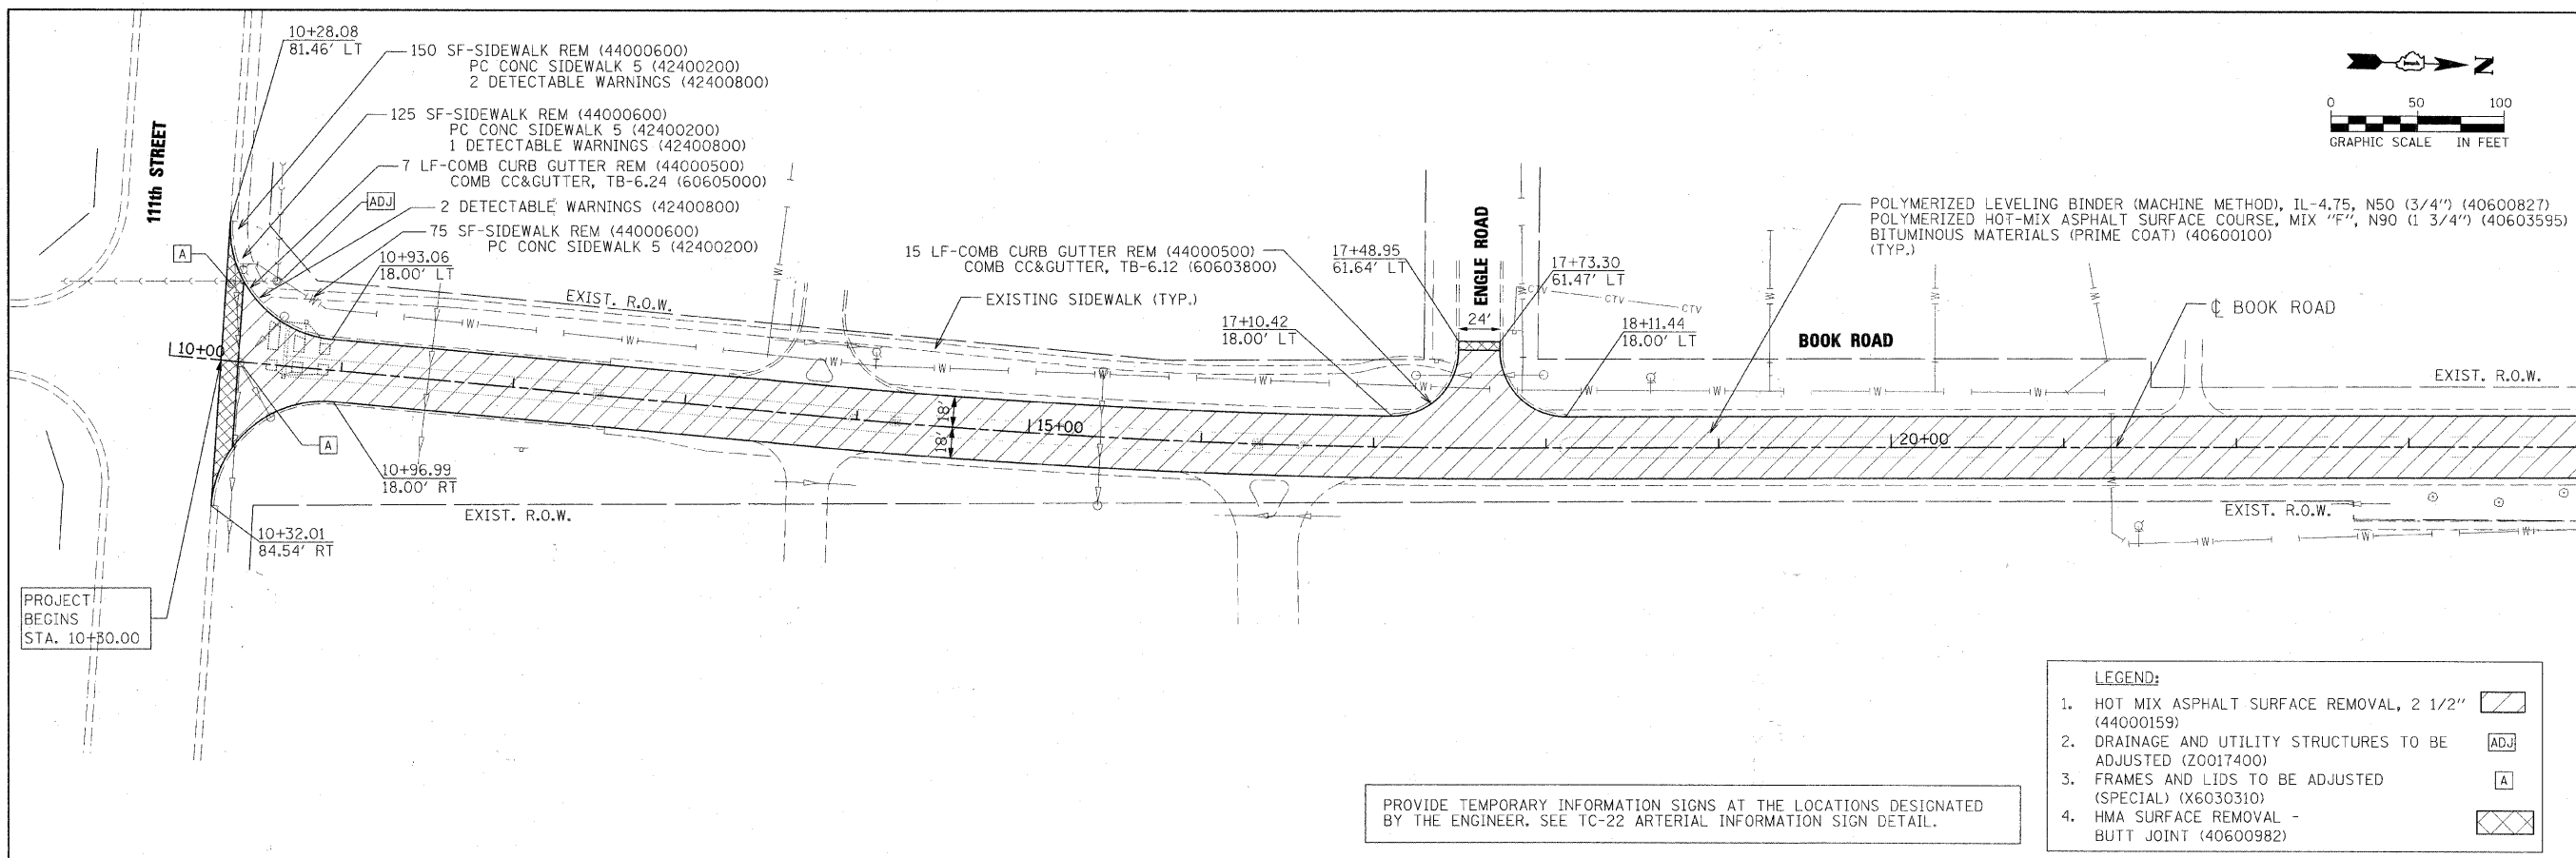



LEGEND:

1. HOT MIX ASPHALT SURFACE REMOVAL, 2 1/2" (44000159)	
2. DRAINAGE AND UTILITY STRUCTURES TO BE ADJUSTED (Z0017400)	
3. FRAMES AND LIDS TO BE ADJUSTED (SPECIAL) (X6030310)	
4. HMA SURFACE REMOVAL - BUTT JOINT (40600982)	

PROVIDE TEMPORARY INFORMATION SIGNS AT THE LOCATIONS DESIGNATED BY THE ENGINEER. SEE TC-22 ARTERIAL INFORMATION SIGN DETAIL.

NOTES:

1. THE ACTUAL LOCATION OF PAVEMENT PATCHING WILL BE DETERMINED IN THE FIELD, DURING CONSTRUCTION, BY THE RESIDENT ENGINEER.
2. ALL CRACK FILL MATERIAL TO BE REMOVED IN ENTIRETY ALONG CURB LINE. REMOVAL OF THE MATERIAL SHALL BE PAID FOR AS HOT MIX ASPHALT REMOVAL.
3. THE CONTRACTOR SHALL REESTABLISH THE AGGREGATE SHOULDER AREAS UP TO 4 FEET WIDE FROM THE ROADWAY EDGE LINE. PAID FOR AS AGGREGATE SHOULDERS, TYPE B 6" (48101200)

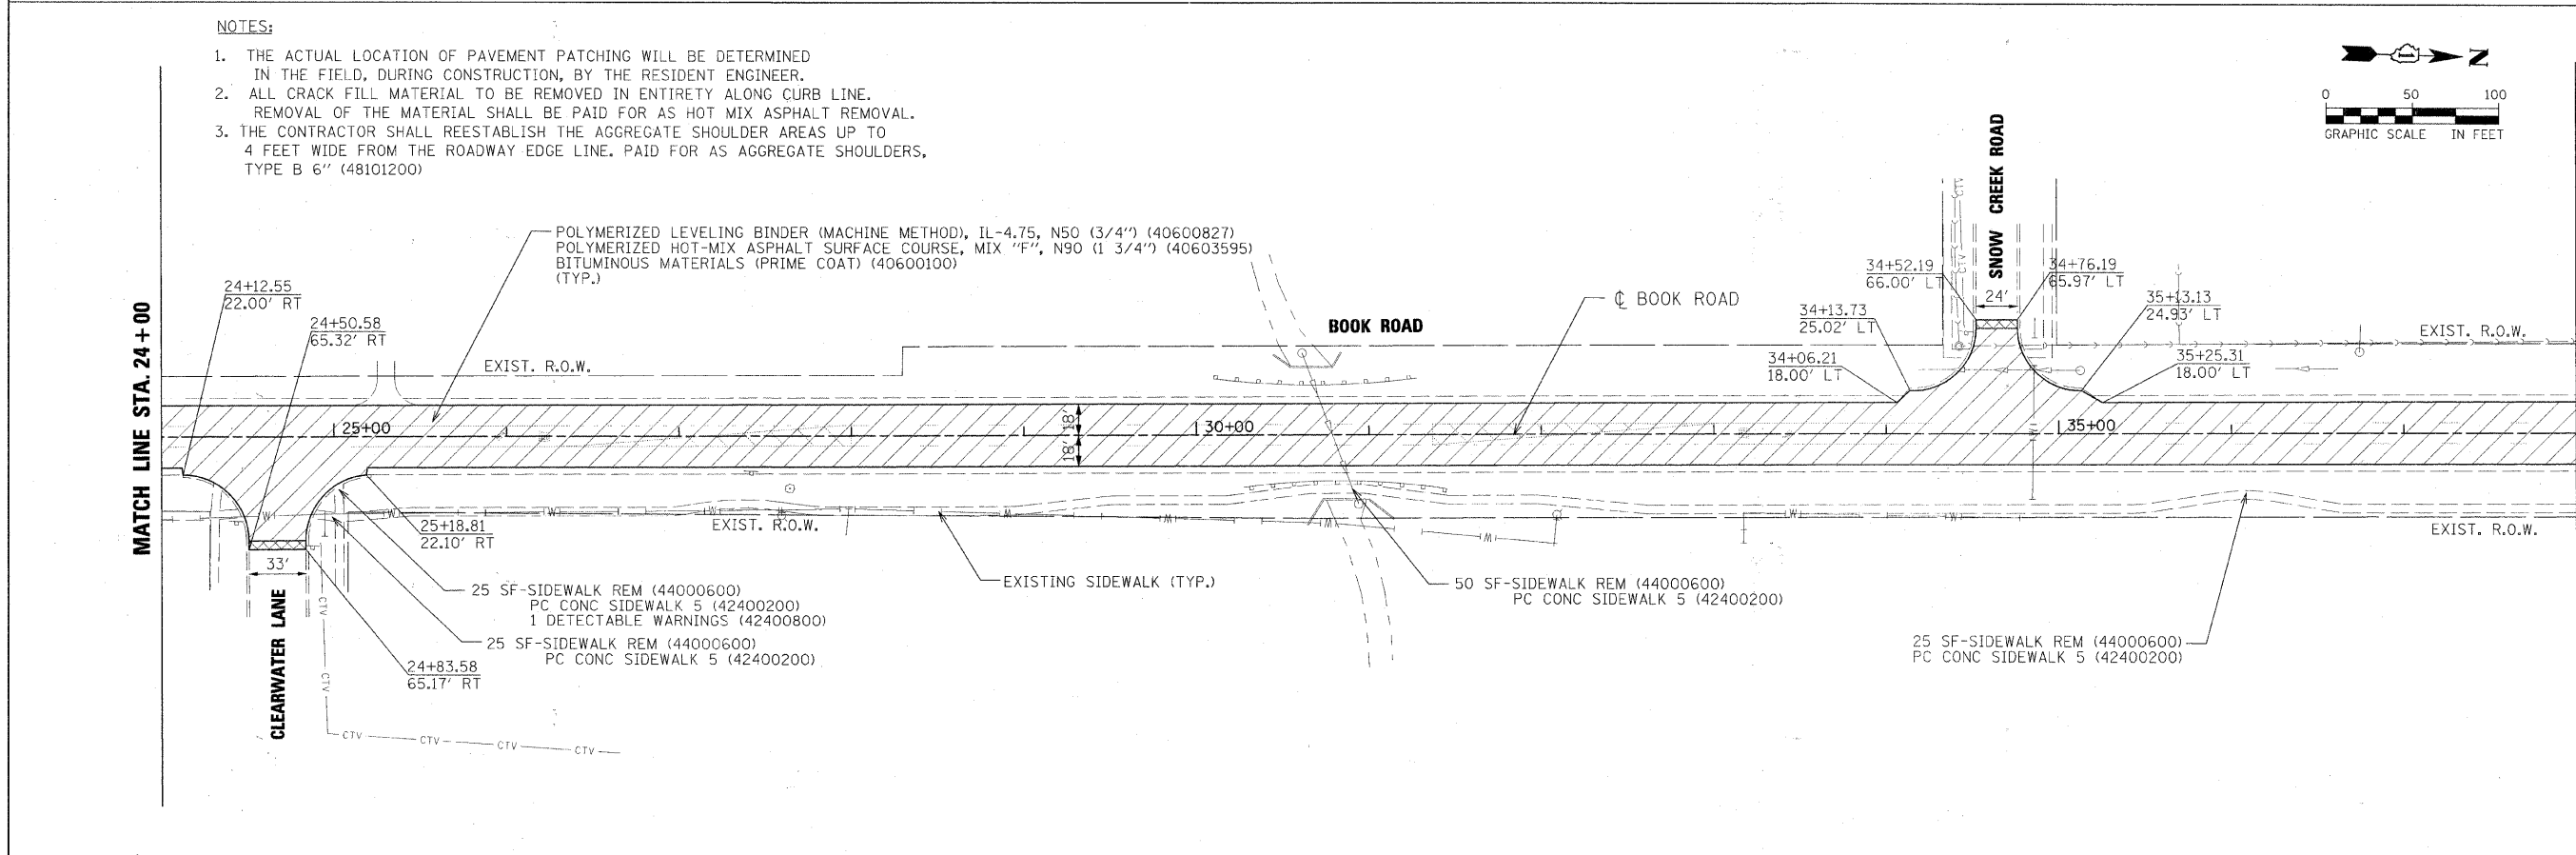

FILE NAME = #FILE#





USER NAME = #USER#	DESIGNED - EVI	REVISED -
PLOT SCALE = #SCALE#	DRAWN - KJB	REVISED -
PLOT DATE = #DATE#	CHECKED - DAK	REVISED -
#TIME#	DATE - 10/24/2011	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

BOOK ROAD PROPOSED ROADWAY PLAN	
SCALE: 1" = 50'±	SHEET NO. 1 OF 6 SHEETS
STA. 10+30	TO STA. 38+00

F.A.U. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30'	SHEET NO. 6
CONTRACT NO. 63659			ILLINOIS FED. AID PROJECT	

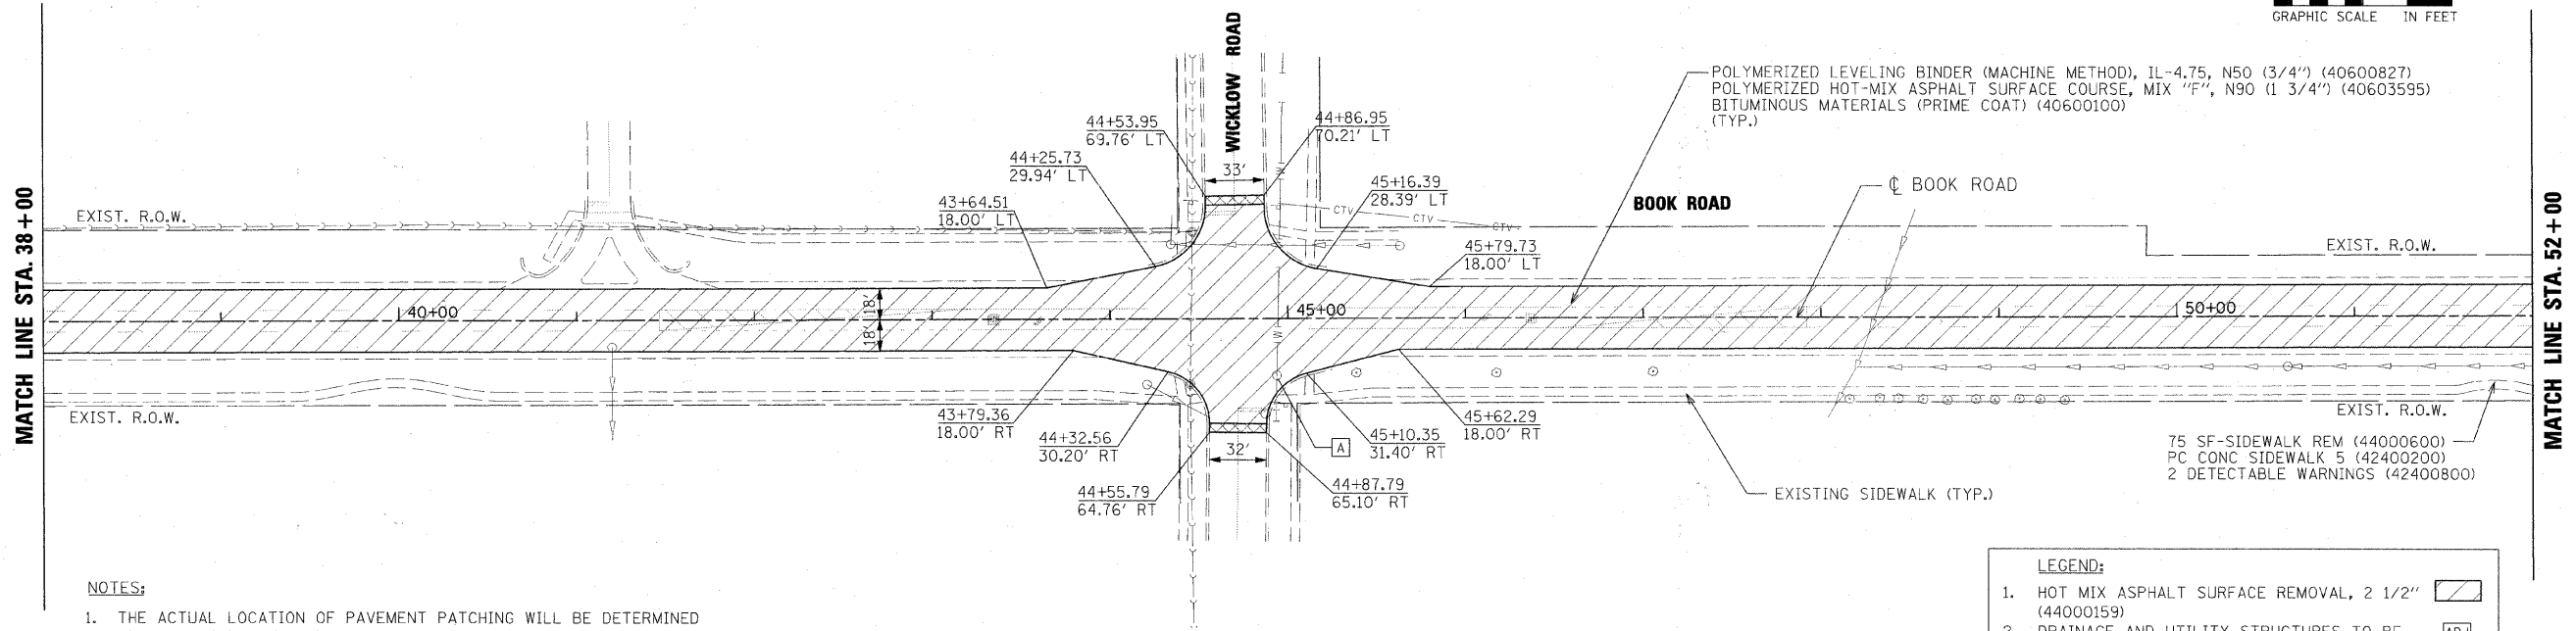



NOTES:

1. THE ACTUAL LOCATION OF PAVEMENT PATCHING WILL BE DETERMINED IN THE FIELD, DURING CONSTRUCTION, BY THE RESIDENT ENGINEER.
2. ALL CRACK FILL MATERIAL TO BE REMOVED IN ENTIRETY ALONG CURB LINE. REMOVAL OF THE MATERIAL SHALL BE PAID FOR AS HOT MIX ASPHALT REMOVAL.
3. THE CONTRACTOR SHALL REESTABLISH THE AGGREGATE SHOULDER AREAS UP TO 4 FEET WIDE FROM THE ROADWAY EDGE LINE. PAID FOR AS AGGREGATE SHOULDERS, TYPE B 6" (48101200)

LEGEND:

1. HOT MIX ASPHALT SURFACE REMOVAL, 2 1/2" (44000159)	
2. DRAINAGE AND UTILITY STRUCTURES TO BE ADJUSTED (Z0017400)	
3. FRAMES AND LIDS TO BE ADJUSTED (SPECIAL) (X6030310)	
4. HMA SURFACE REMOVAL - BUTT JOINT (40600982)	

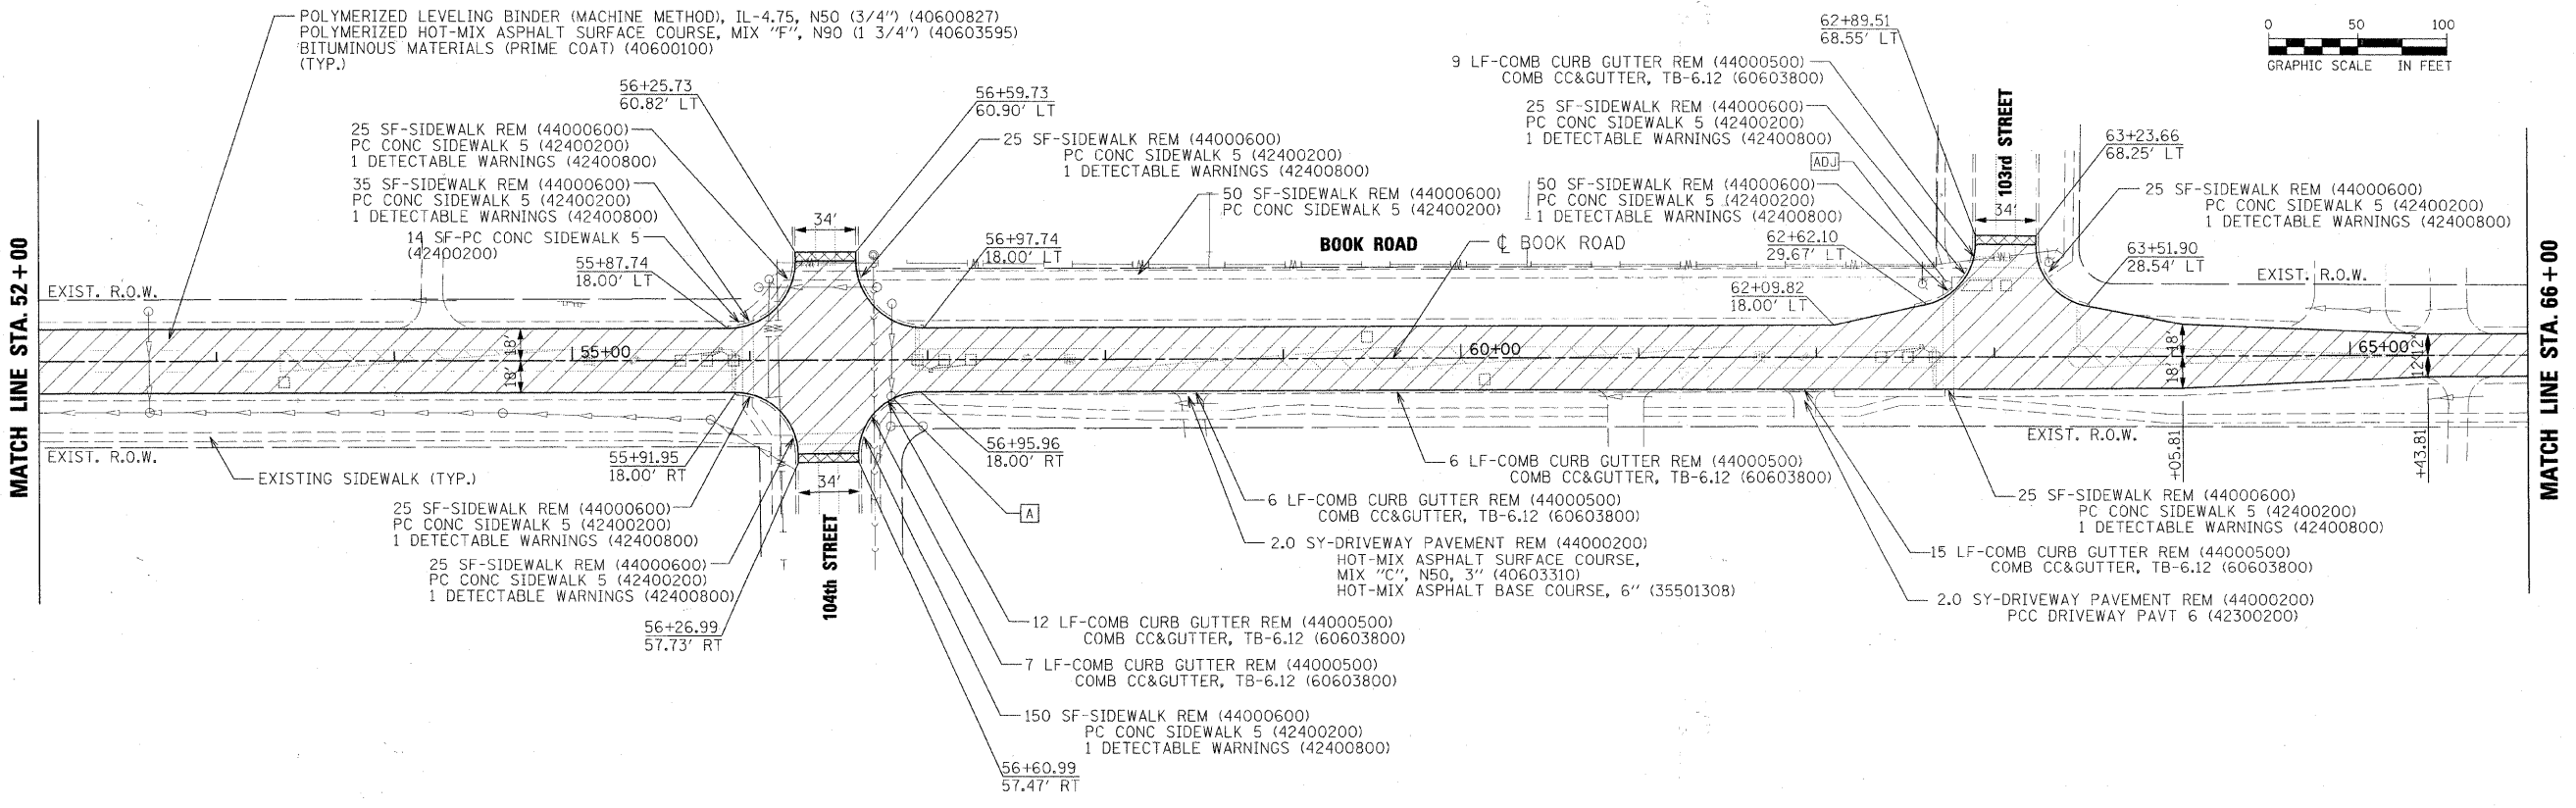

USER NAME = #USER#	DESIGNED - EVI	REVISED -
PLOT SCALE = #SCALE#	DRAWN - KJB	REVISED -
PLOT DATE = #DATE#	CHECKED - DAK	REVISED -
	DATE - 10/24/2011	REVISED -



**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**BOOK ROAD
PROPOSED ROADWAY PLAN**

SCALE: 1" = 50 ft | SHEET NO. 2 OF 6 SHEETS | STA. 38+00 TO STA. 66+00

F.A.U. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 7
CONTRACT NO. 63659			FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT	

FILE NAME = #FILES#

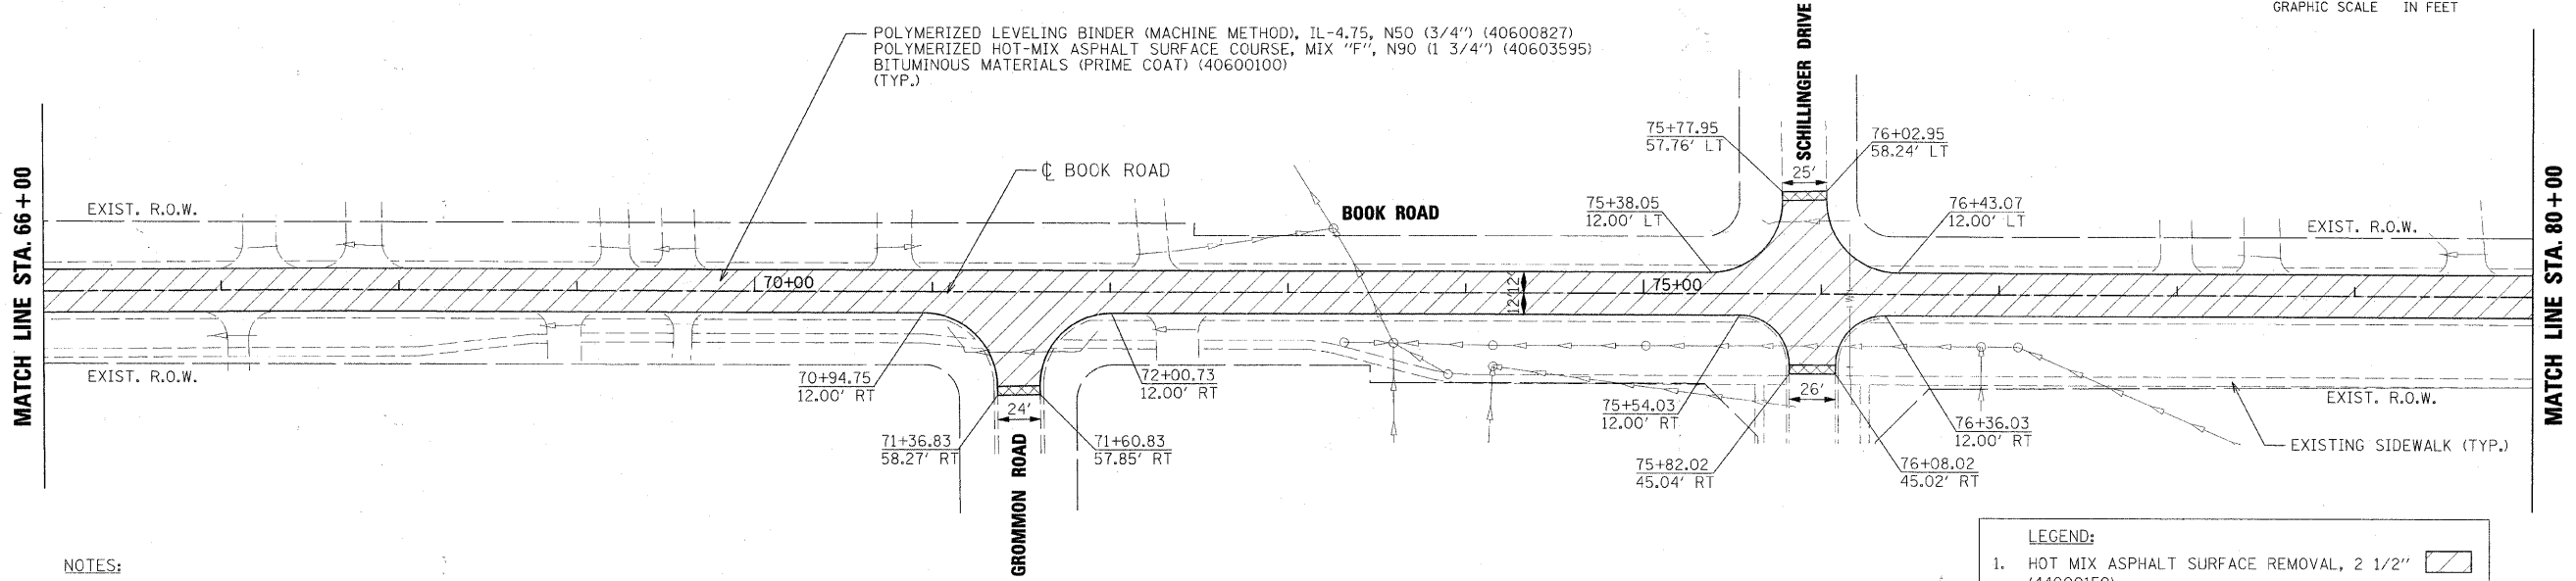



NOTES:

1. THE ACTUAL LOCATION OF PAVEMENT PATCHING WILL BE DETERMINED IN THE FIELD, DURING CONSTRUCTION, BY THE RESIDENT ENGINEER.
2. ALL CRACK FILL MATERIAL TO BE REMOVED IN ENTIRETY ALONG CURB LINE. REMOVAL OF THE MATERIAL SHALL BE PAID FOR AS HOT MIX ASPHALT REMOVAL.
3. THE CONTRACTOR SHALL REESTABLISH THE AGGREGATE SHOULDER AREAS UP TO 4 FEET WIDE FROM THE ROADWAY EDGE LINE. PAID FOR AS AGGREGATE SHOULDERS, TYPE B 6" (48101200)

LEGEND:

1. HOT MIX ASPHALT SURFACE REMOVAL, 2 1/2" (44000159)	
2. DRAINAGE AND UTILITY STRUCTURES TO BE ADJUSTED (Z0017400)	
3. FRAMES AND LIDS TO BE ADJUSTED (SPECIAL) (X6030310)	
4. HMA SURFACE REMOVAL - BUTT JOINT (40600982)	

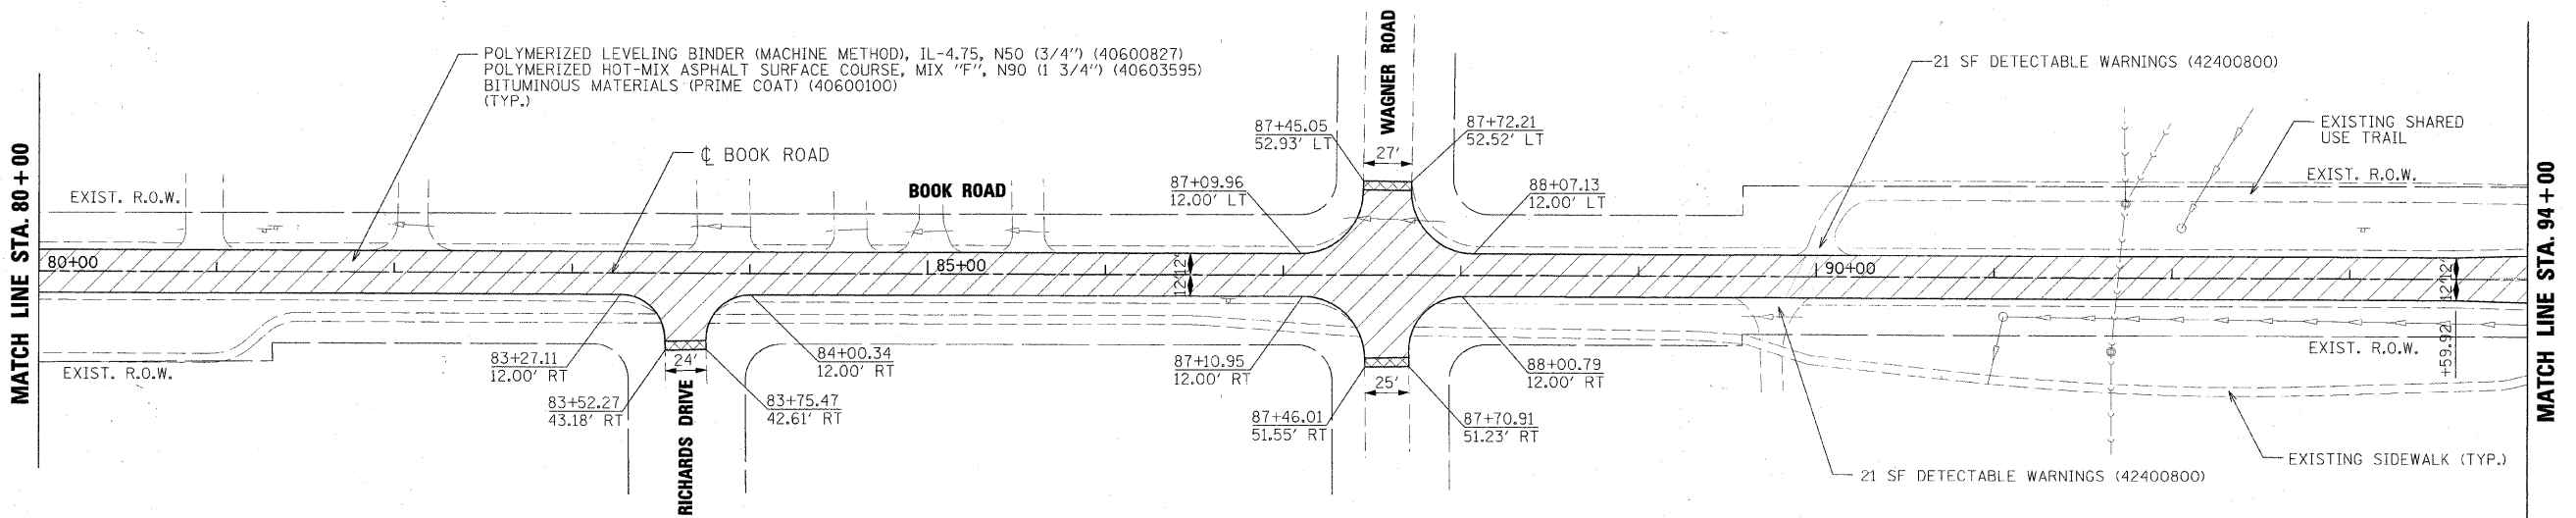

USER NAME = #USER#	DESIGNED - EVI	REVISED -
PLOT SCALE = #SCALE#	DRAWN - KJB	REVISED -
PLOT DATE = #DATE#	CHECKED - DAK	REVISED -
#TIME#	DATE - 10/24/2011	REVISED -



**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**BOOK ROAD
PROPOSED ROADWAY PLAN**



SCALE: 1" = 50 FT SHEET NO. 3 OF 6 SHEETS STA. 66+00 TO STA. 94+00

F.A.J. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 8
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT			CONTRACT NO. 63659	

FILE NAME = #FILE#

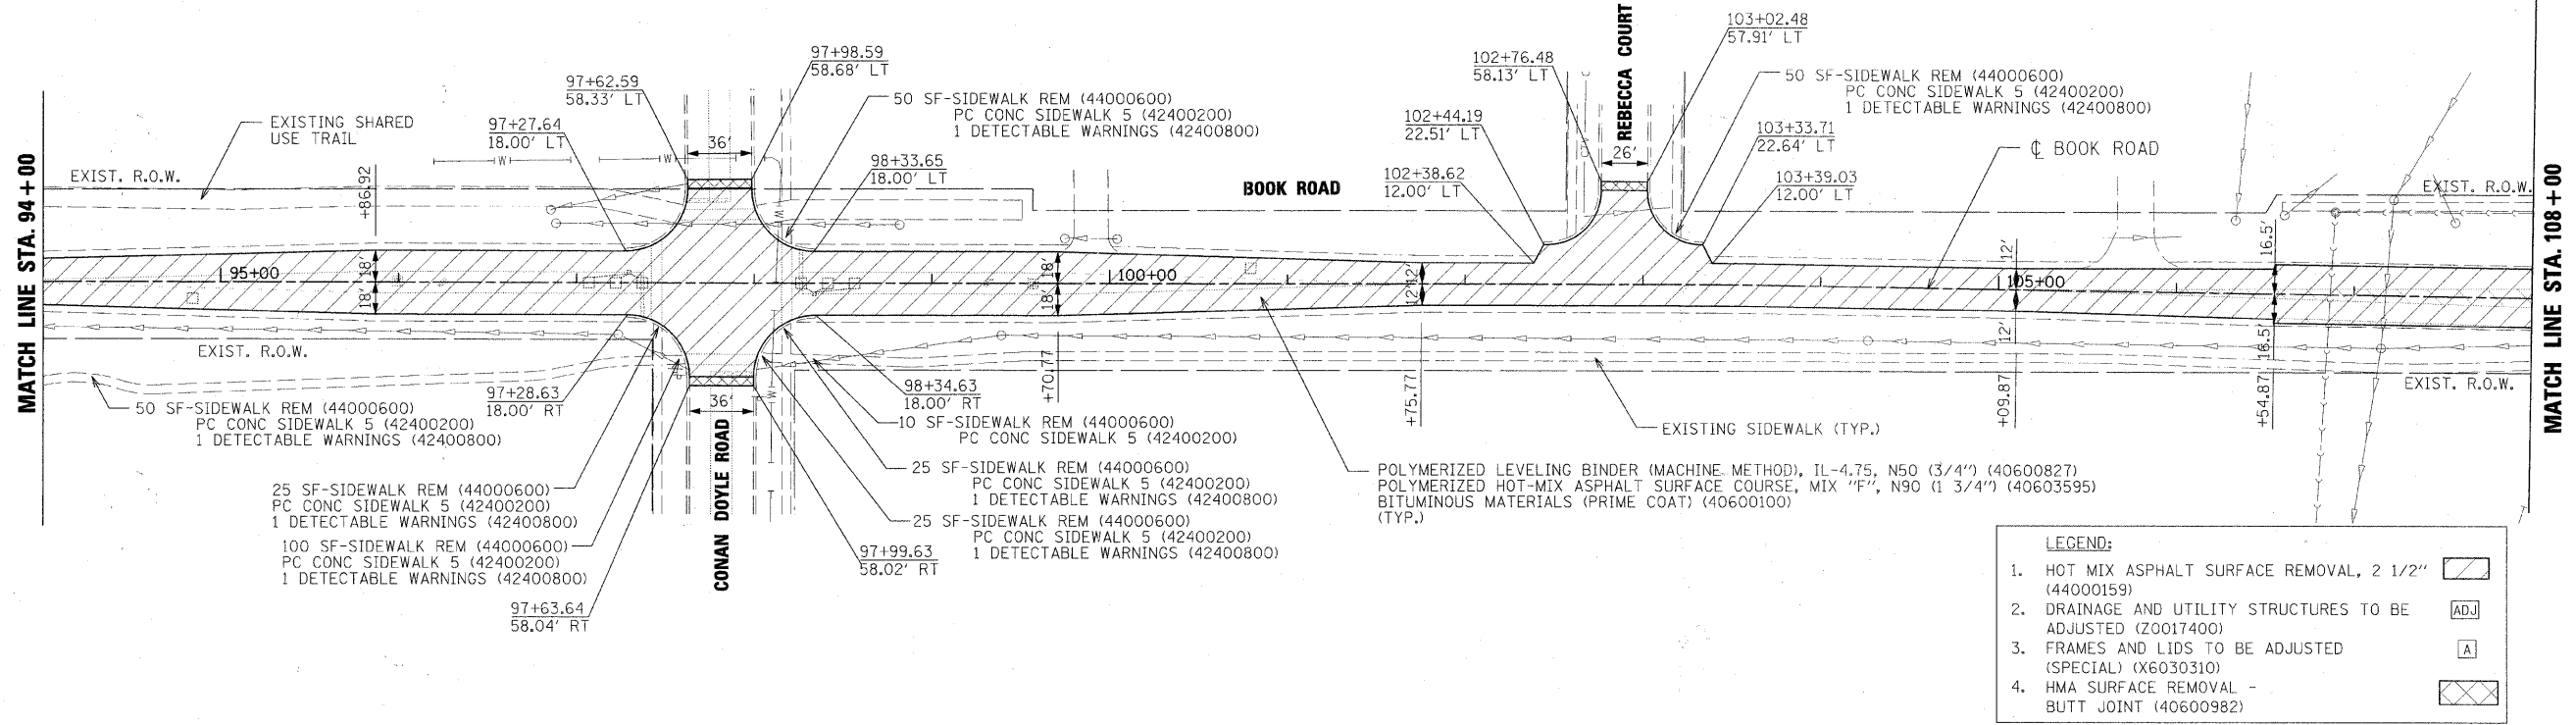

- NOTES:**
- THE ACTUAL LOCATION OF PAVEMENT PATCHING WILL BE DETERMINED IN THE FIELD, DURING CONSTRUCTION, BY THE RESIDENT ENGINEER.
 - ALL CRACK FILL MATERIAL TO BE REMOVED IN ENTIRETY ALONG CURB LINE. REMOVAL OF THE MATERIAL SHALL BE PAID FOR AS HOT MIX ASPHALT REMOVAL.
 - THE CONTRACTOR SHALL REESTABLISH THE AGGREGATE SHOULDER AREAS UP TO 4 FEET WIDE FROM THE ROADWAY EDGE LINE. PAID FOR AS AGGREGATE SHOULDERS, TYPE B 6" (48101200)

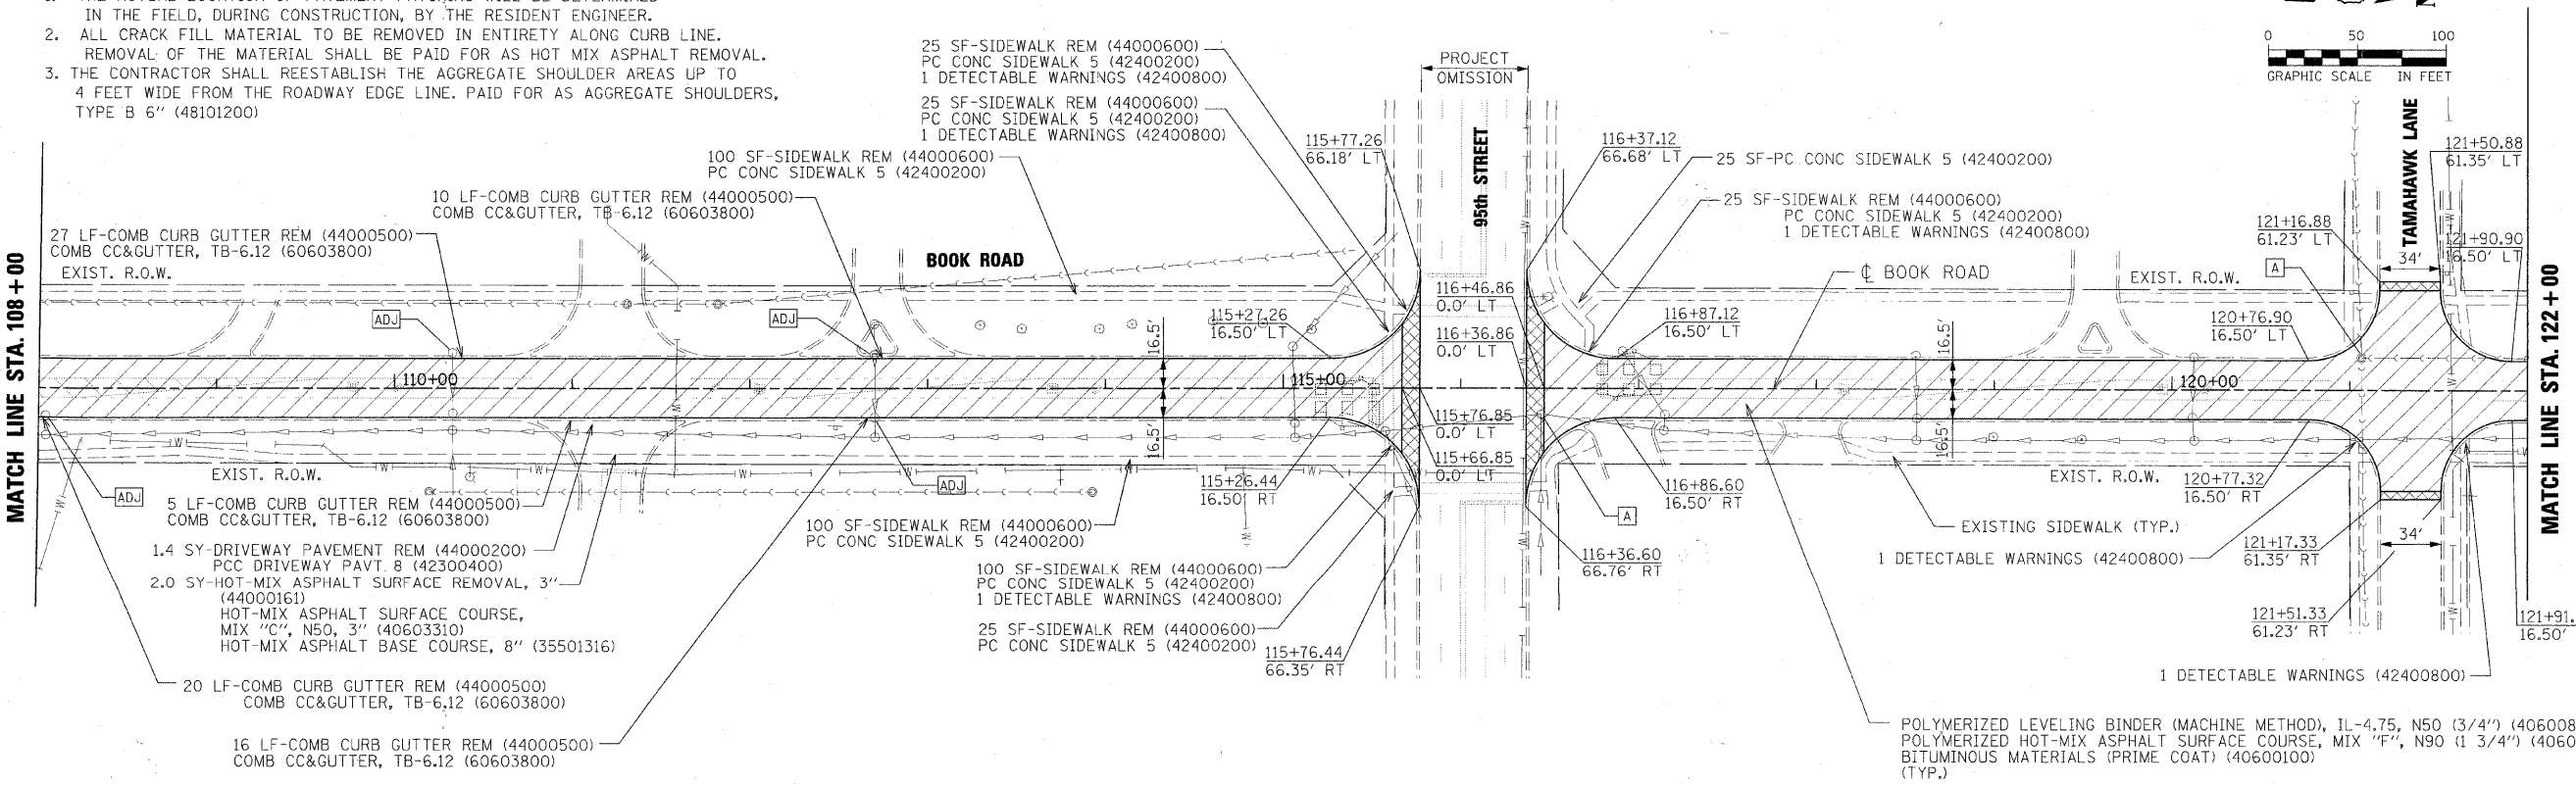

FILE NAME = #FILES#





USER NAME = #USER#	DESIGNED - EVI	REVISED -
PLOT SCALE = #SCALE#	DRAWN - KJB	REVISED -
PLOT DATE = #DATE#	CHECKED - DAK	REVISED -
#TIME#	DATE - 10/24/2011	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**



BOOK ROAD PROPOSED ROADWAY PLAN	
SCALE: 1" = 50' ±	SHEET NO. 4 OF 6 SHEETS
STA. 94+00	TO STA. 122+00

F.A.U. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 9
CONTRACT NO. 63659			FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT	

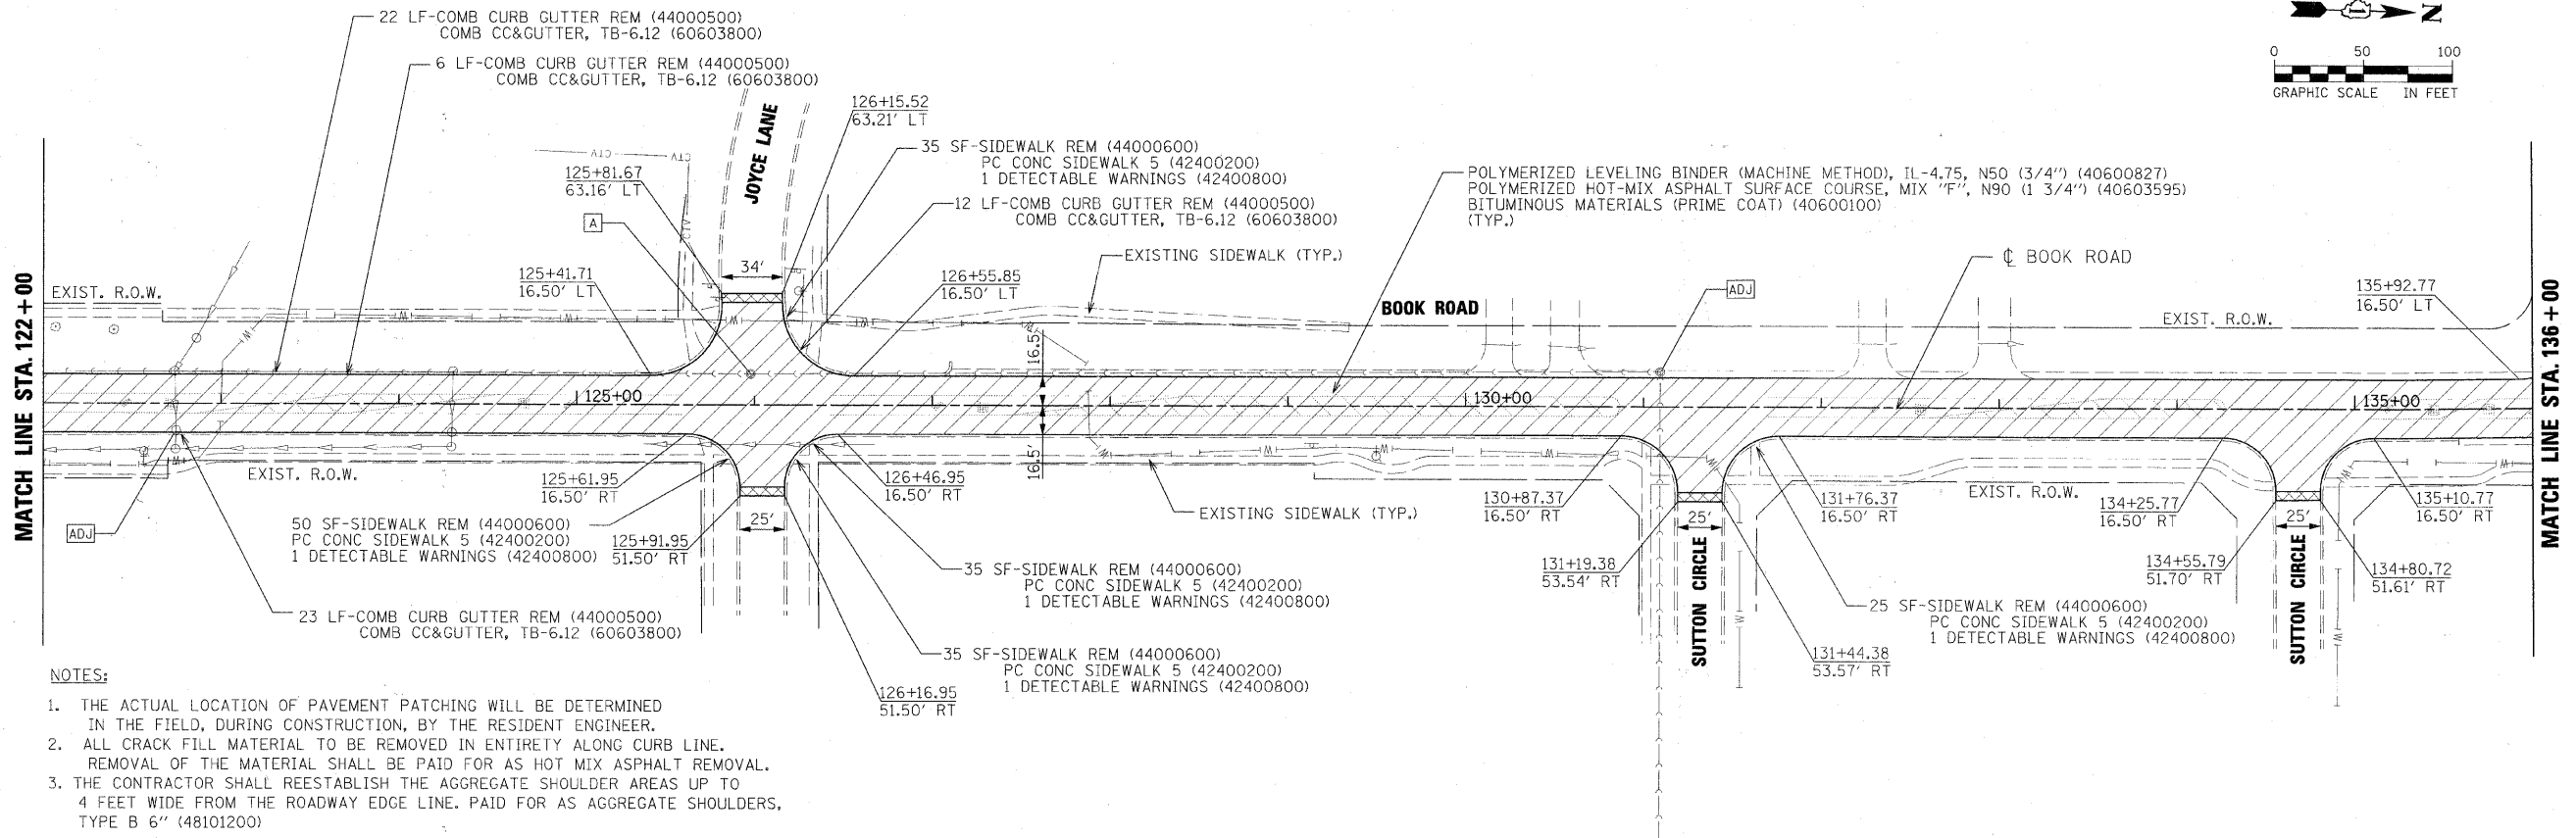

LEGEND:

1. HOT MIX ASPHALT SURFACE REMOVAL, 2 1/2" (44000159)	
2. DRAINAGE AND UTILITY STRUCTURES TO BE ADJUSTED (Z0017400)	
3. FRAMES AND LIDS TO BE ADJUSTED (SPECIAL) (X6030310)	
4. HMA SURFACE REMOVAL - BUTT JOINT (40600982)	

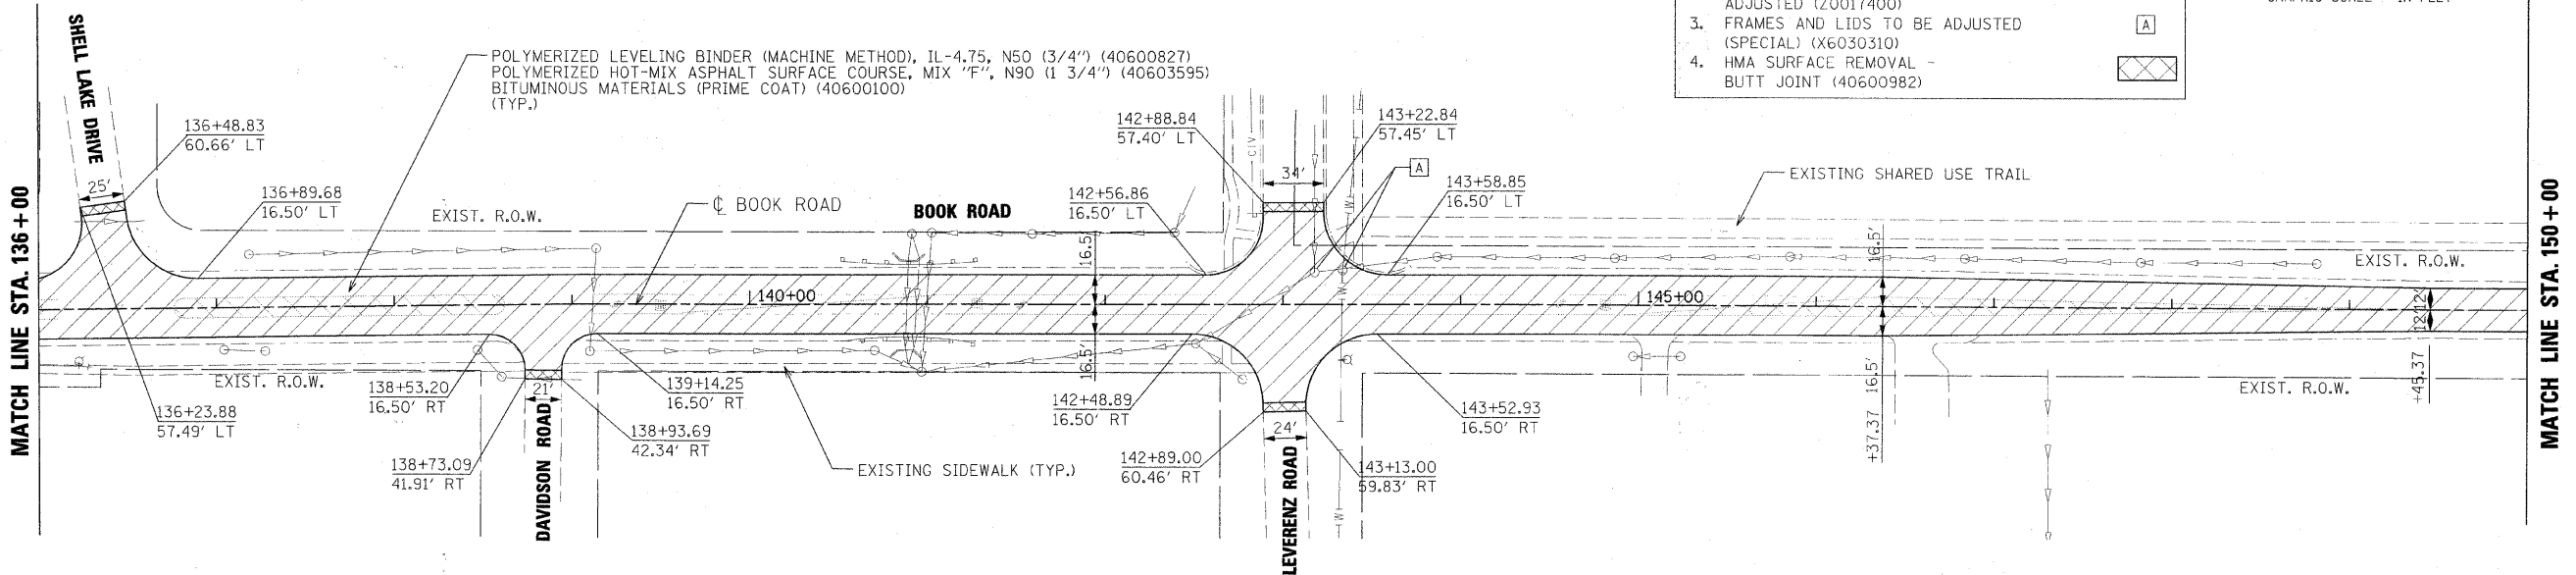

FILE NAME = #FILE#





USER NAME = #USER#	DESIGNED - EVI	REVISED -
PLOT SCALE = #SCALE#	DRAWN - KJB	REVISED -
PLOT DATE = #DATE#	CHECKED - DAK	REVISED -
#TIME#	DATE - 10/24/2011	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

BOOK ROAD PROPOSED ROADWAY PLAN		
SCALE: 1" = 50 FT	SHEET NO. 5 OF 6 SHEETS	STA. 122+00 TO STA. 150+00

F.A.I. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 10
FED. ROAD DIST. NO. 1 ILLINOIS			CONTRACT NO. 63659	

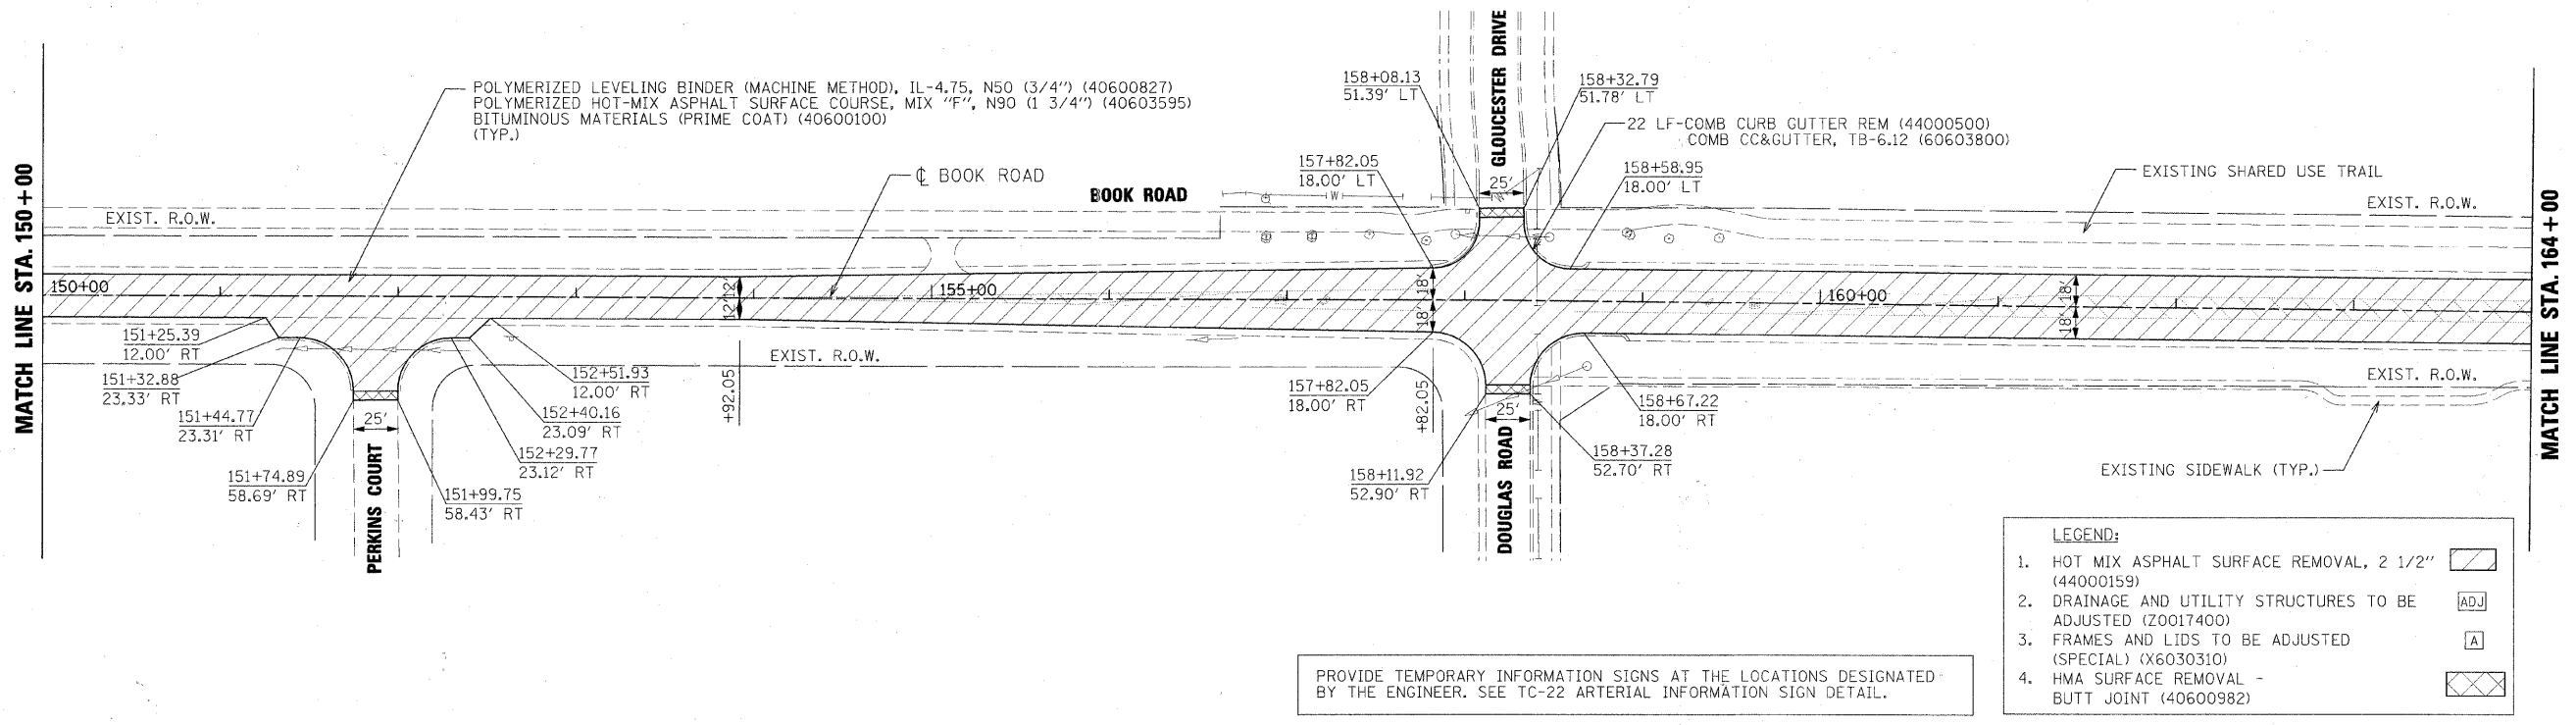



LEGEND:

1. HOT MIX ASPHALT SURFACE REMOVAL, 2 1/2" (44000159)	
2. DRAINAGE AND UTILITY STRUCTURES TO BE ADJUSTED (Z0017400)	
3. FRAMES AND LIDS TO BE ADJUSTED (SPECIAL) (X6030310)	
4. HMA SURFACE REMOVAL - BUTT JOINT (40600982)	

PROVIDE TEMPORARY INFORMATION SIGNS AT THE LOCATIONS DESIGNATED BY THE ENGINEER. SEE TC-22 ARTERIAL INFORMATION SIGN DETAIL.

NOTES:

1. THE ACTUAL LOCATION OF PAVEMENT PATCHING WILL BE DETERMINED IN THE FIELD, DURING CONSTRUCTION, BY THE RESIDENT ENGINEER.
2. ALL CRACK FILL MATERIAL TO BE REMOVED IN ENTIRETY ALONG CURB LINE. REMOVAL OF THE MATERIAL SHALL BE PAID FOR AS HOT MIX ASPHALT REMOVAL.
3. THE CONTRACTOR SHALL REESTABLISH THE AGGREGATE SHOULDER AREAS UP TO 4 FEET WIDE FROM THE ROADWAY EDGE LINE. PAID FOR AS AGGREGATE SHOULDERS, TYPE B 6" (48101200)

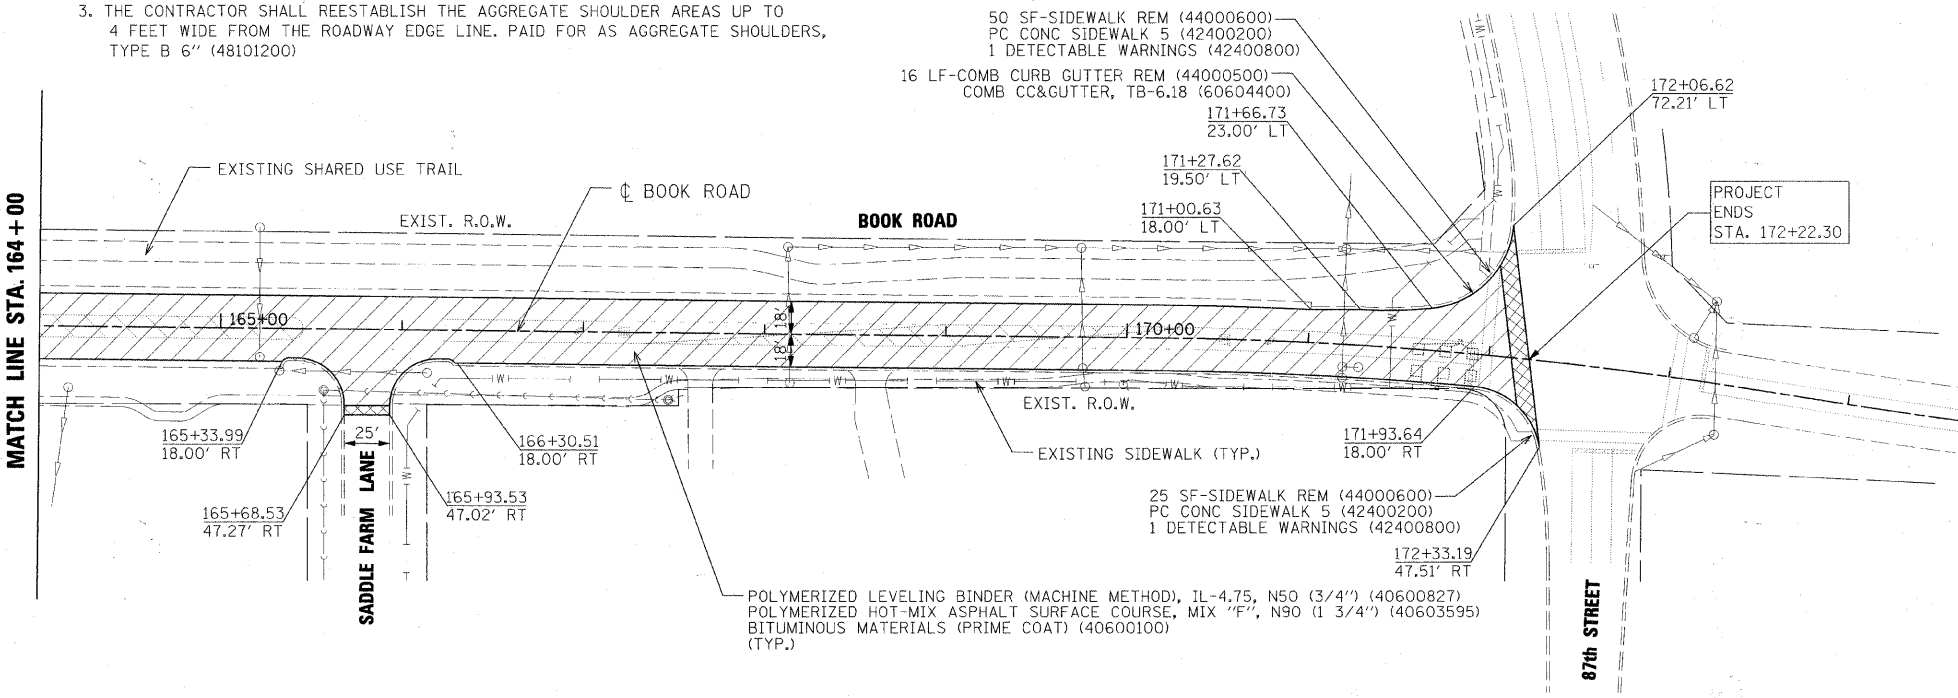

USER NAME = *USER*	DESIGNED - EVI	REVISED -
PLCT SCALE = *SCALE*	DRAWN - KJB	REVISED -
PLCT DATE = *DATE*	CHECKED - DAK	REVISED -
TIME	DATE - 10/24/2011	REVISED -


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**BOOK ROAD
PROPOSED ROADWAY PLAN**

SCALE: 1" = 50 FT SHEET NO. 6 OF 6 SHEETS STA. 150+00 TO STA. 172+22.30


F.A.I. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 11
CONTRACT NO. 63659			FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT	

FILE NAME = \$FILE\$




11th STREET

PROJECT BEGINS STA. 10+30.00

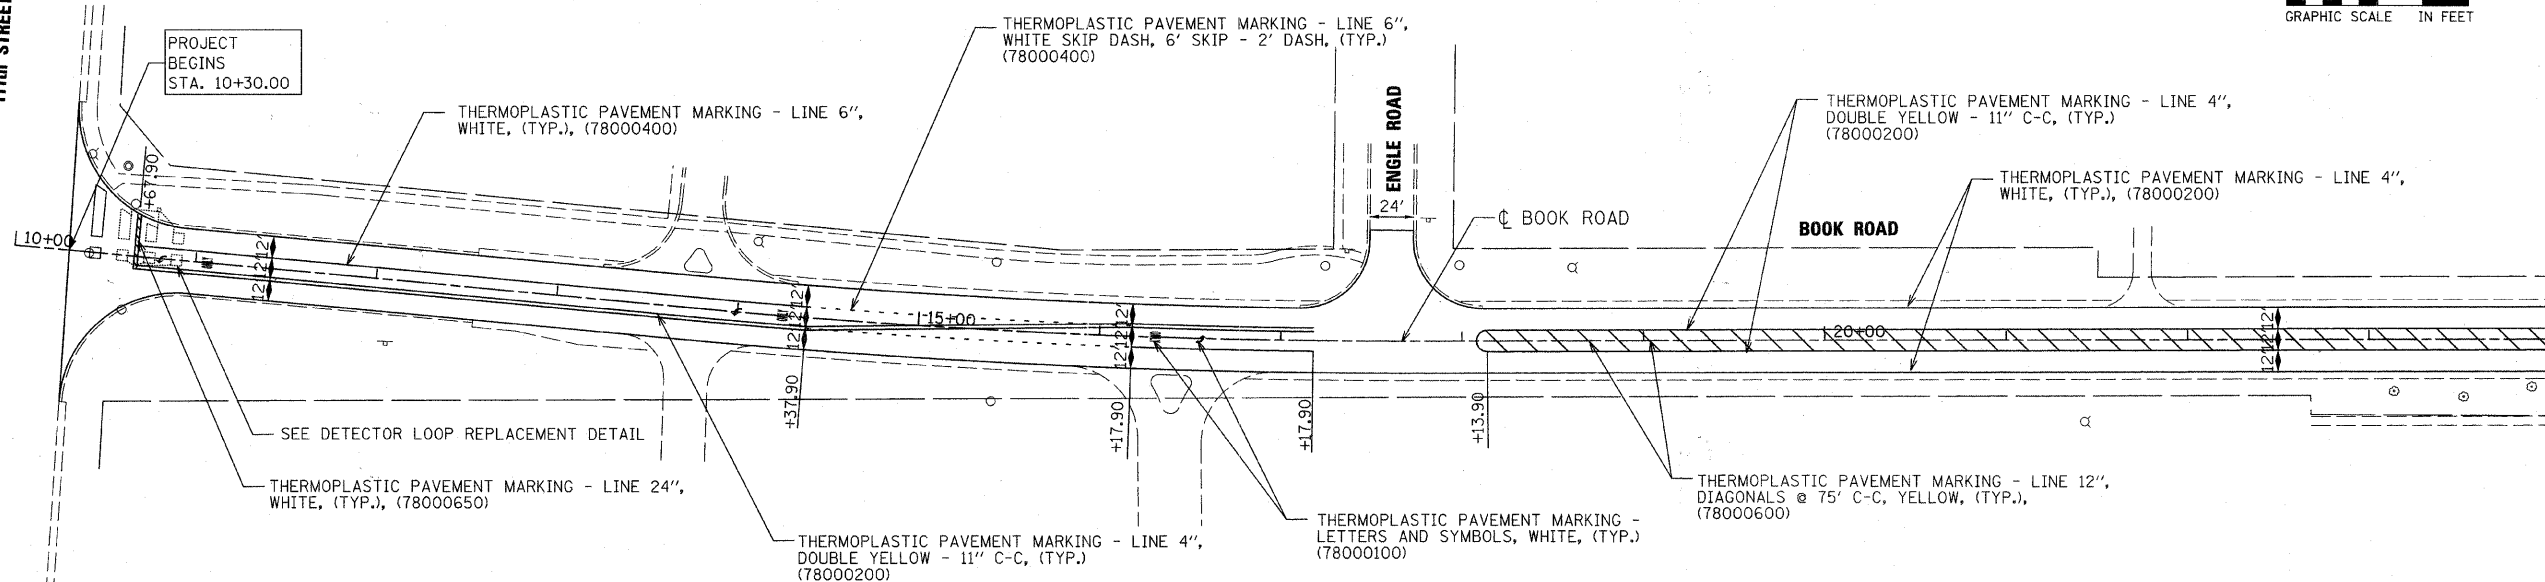


MATCH LINE STA. 24+00

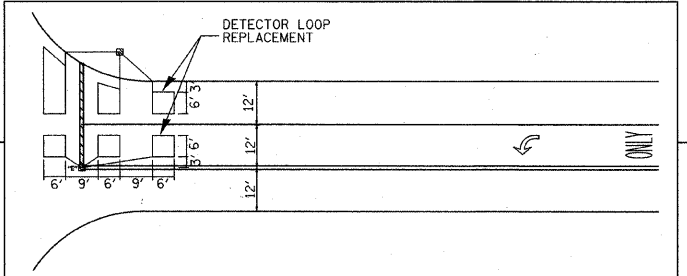

DETECTOR LOOP REPLACEMENT DETAIL
SEE DISTRICT 1 TS-07


TRAFFIC SIGNAL LEGEND

	PROPOSED	EXISTING
SIGNAL POST		
HANDHOLE		
DETECTOR LOOP		



MATCH LINE STA. 24+00

CLEARWATER LANE

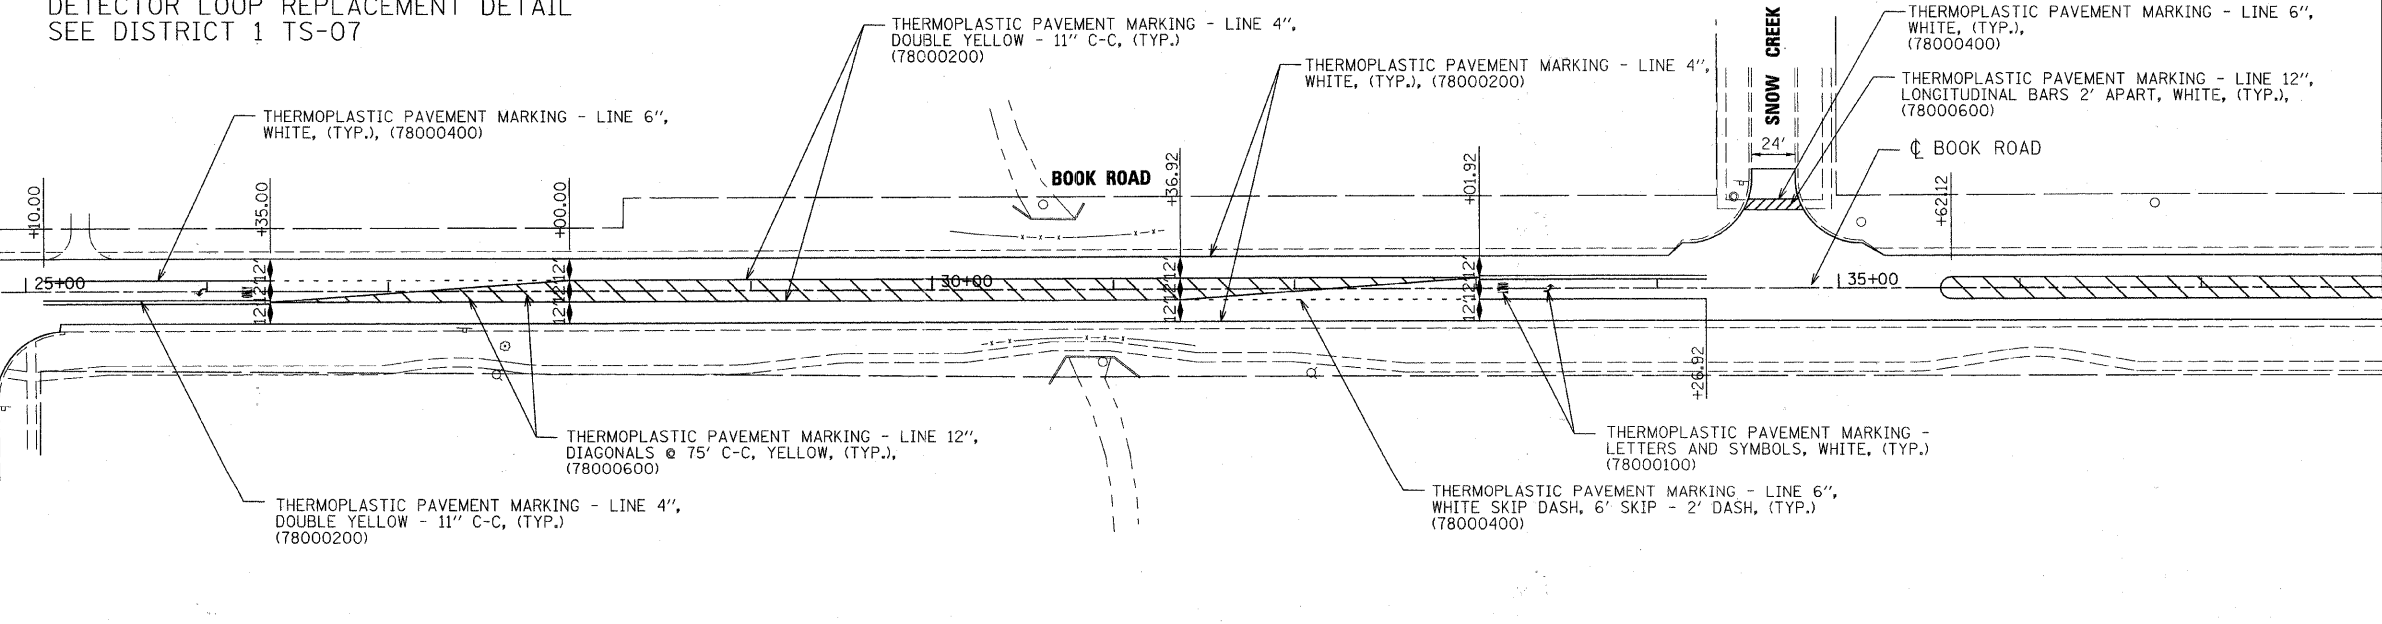

MATCH LINE STA. 38+00

FILE NAME = G:\Naper\11e_25957854_BookRoad\Drawings\11e_BookRoad\11e_Visual.dgn






USER NAME = #USER#	DESIGNED - EVI	REVISED -
PLOT SCALE = 50.0000' / IN.	DRAWN - KJB	REVISED -
PLOT DATE = 11/29/2011 10:18:22 AM	CHECKED - DAK	REVISED -
	DATE - 10/24/2011	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BOOK ROAD
PAVEMENT MARKING PLAN



SCALE: 1" = 50 ft SHEET NO. 1 OF 6 SHEETS STA. 10+30 TO STA. 38+00

F.A.I.D. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 12
CONTRACT NO. 63659				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

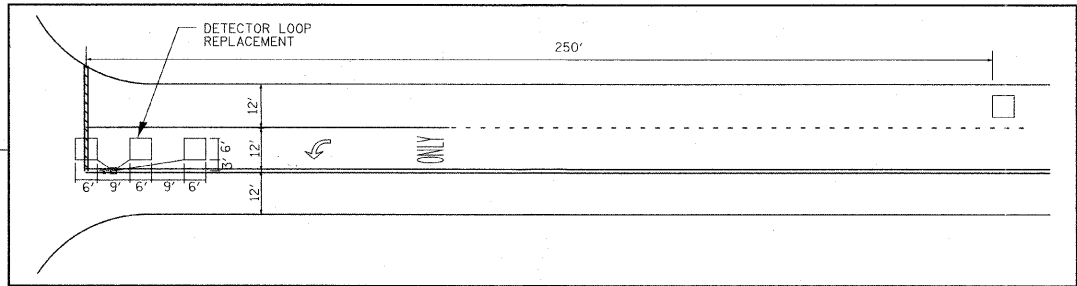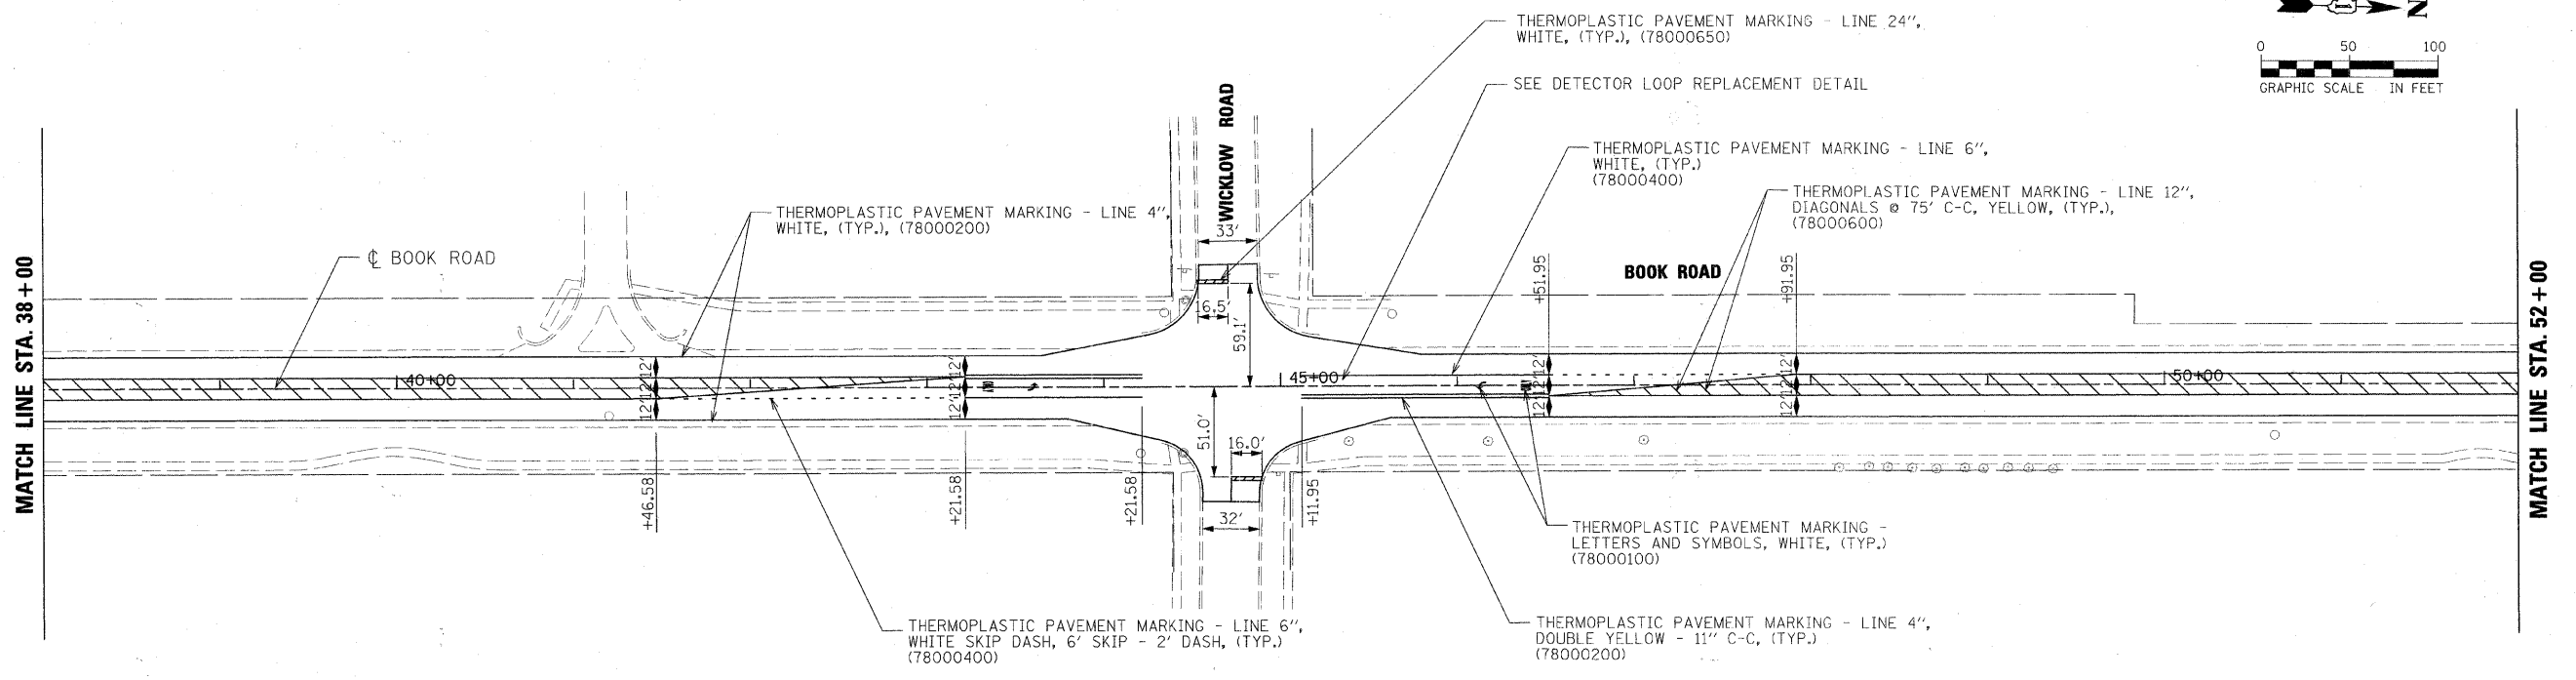

TRAFFIC SIGNAL LEGEND

	PROPOSED	EXISTING
SIGNAL POST		
HANDHOLE		
DETECTOR LOOP		

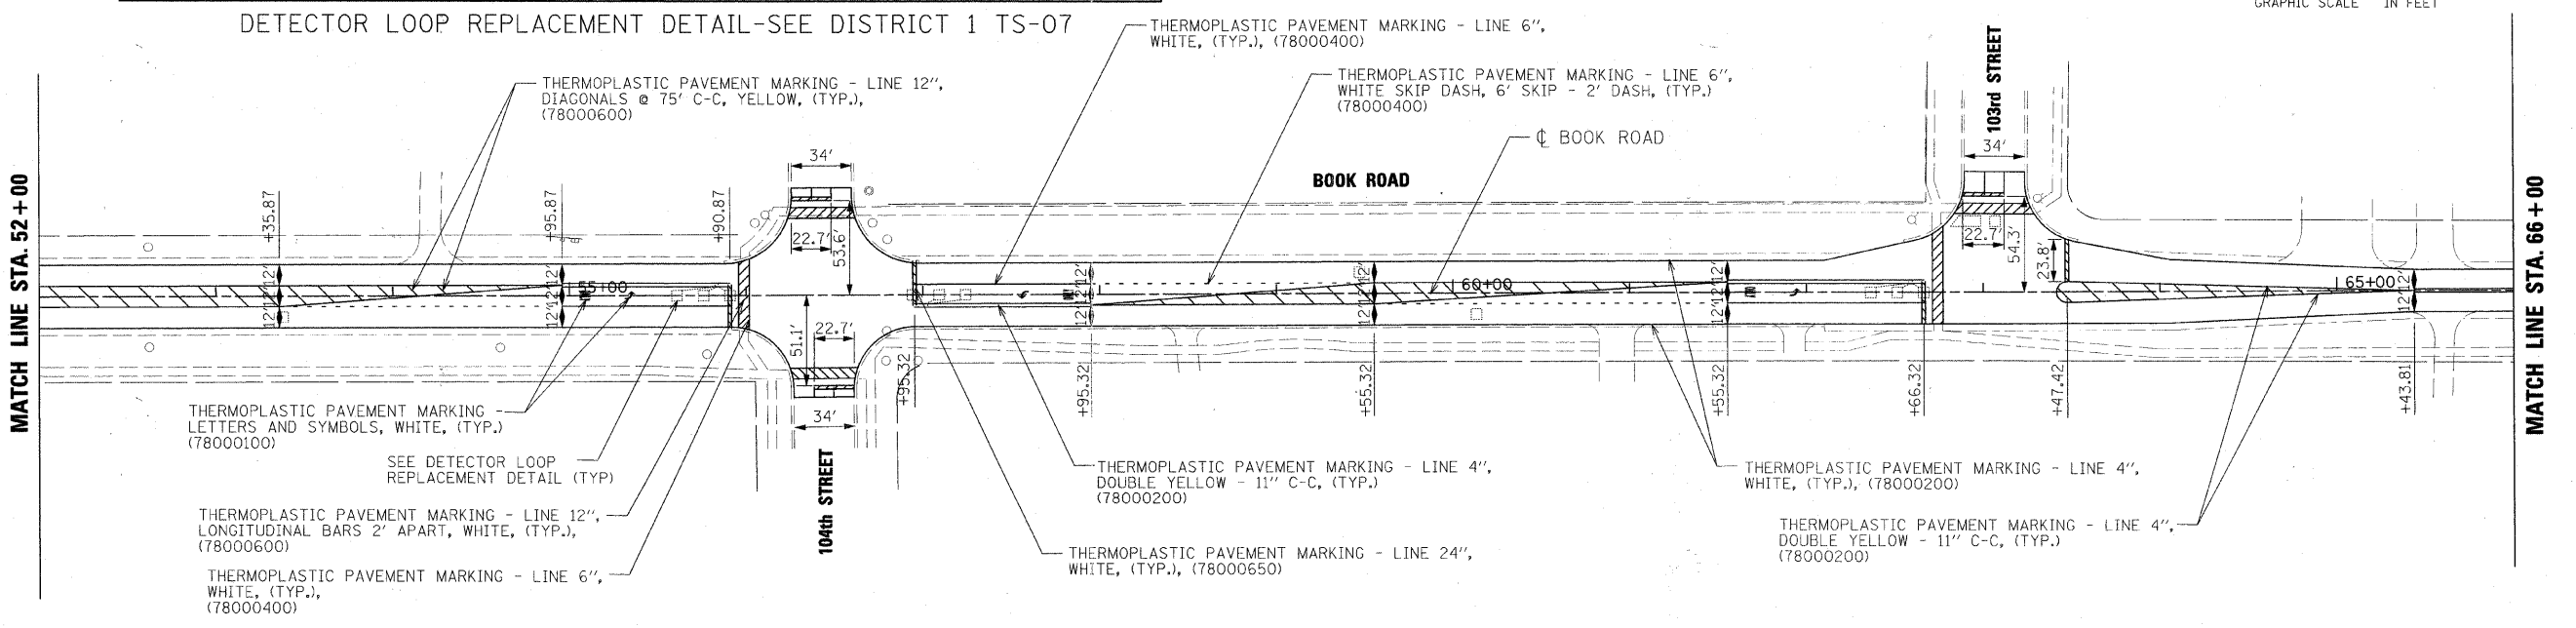

USER NAME = #USER#	DESIGNED - EVI	REVISED -
PLT SCALE = 50.0000' / IN.	DRAWN - KJB	REVISED -
PLT DATE = 10/11/2011 3:37:42 PM	CHECKED - DAK	REVISED -
	DATE - 10/24/2011	REVISED -





**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**BOOK ROAD
PAVEMENT MARKING PLAN**

SCALE: 1" = 50 ft SHEET NO. 2 OF 6 SHEETS STA. 38+00 TO STA. 66+00

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0082	11-00149-00-RS	WILL	30	13
CONTRACT NO. 63659				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

FILE NAME = D:\Nepers\11a_29387864_Book\Book.dwg; Drawings\Plan&Prof\1a_Pmk2.dwg

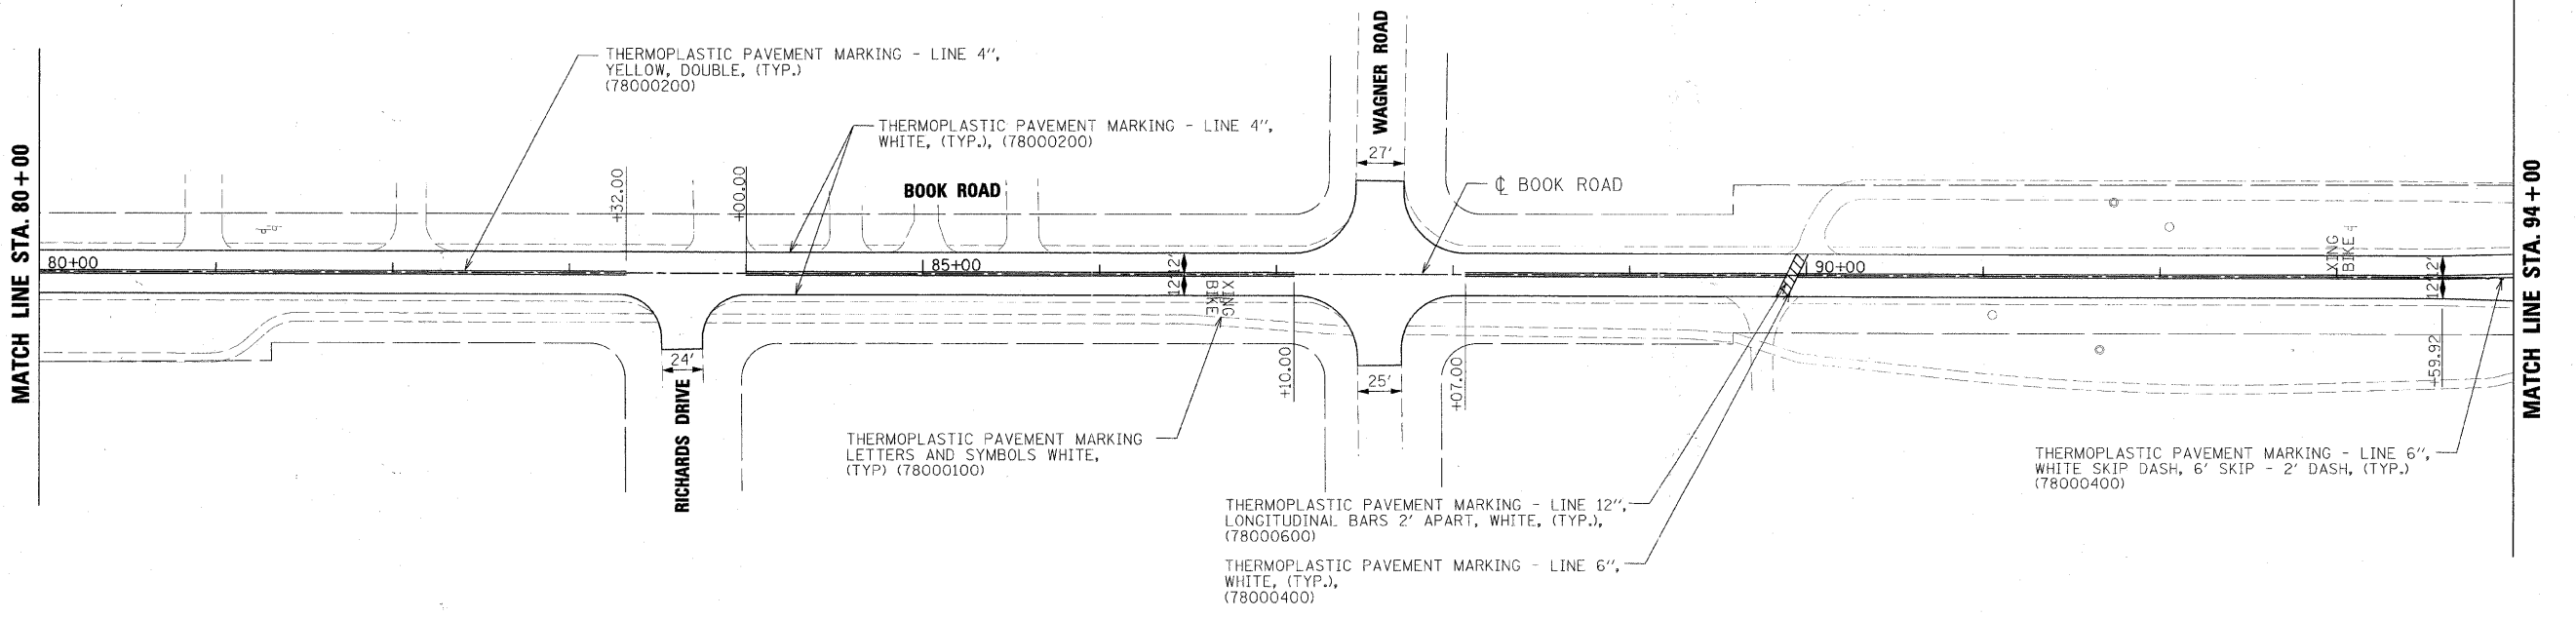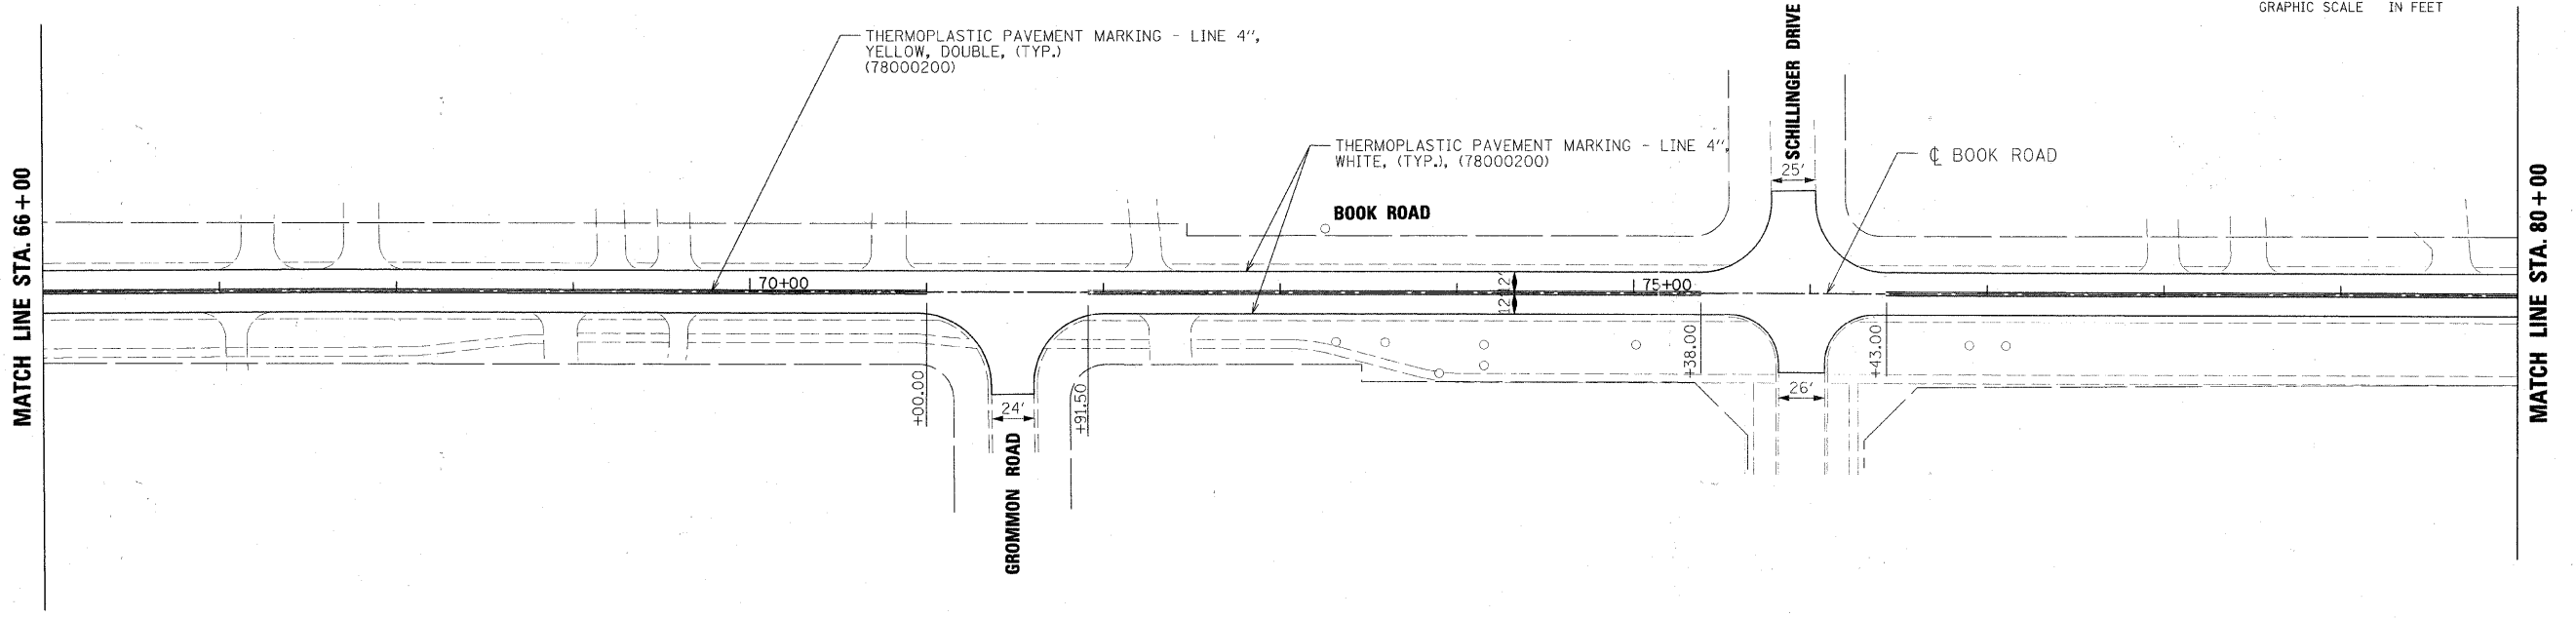

FILE NAME = G:\Inkserv\11a_2536785-BookL\APP\Drawings\1\Book\Plan\Book3.dgn





USER NAME = #USER#	DESIGNED - EVI	REVISED -
PLOT SCALE = 50.0000' / IN.	DRAWN - KJB	REVISED -
PLOT DATE = 10/11/2011 3:38:11 PM	CHECKED - DAK	REVISED -
	DATE - 10/24/2011	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**BOOK ROAD
PAVEMENT MARKING PLAN**

SCALE: 1" = 50 FT | SHEET NO. 3 OF 6 SHEETS | STA. 66+00 TO STA. 94+00

F.A.U. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 14
CONTRACT NO. 63659			FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT	

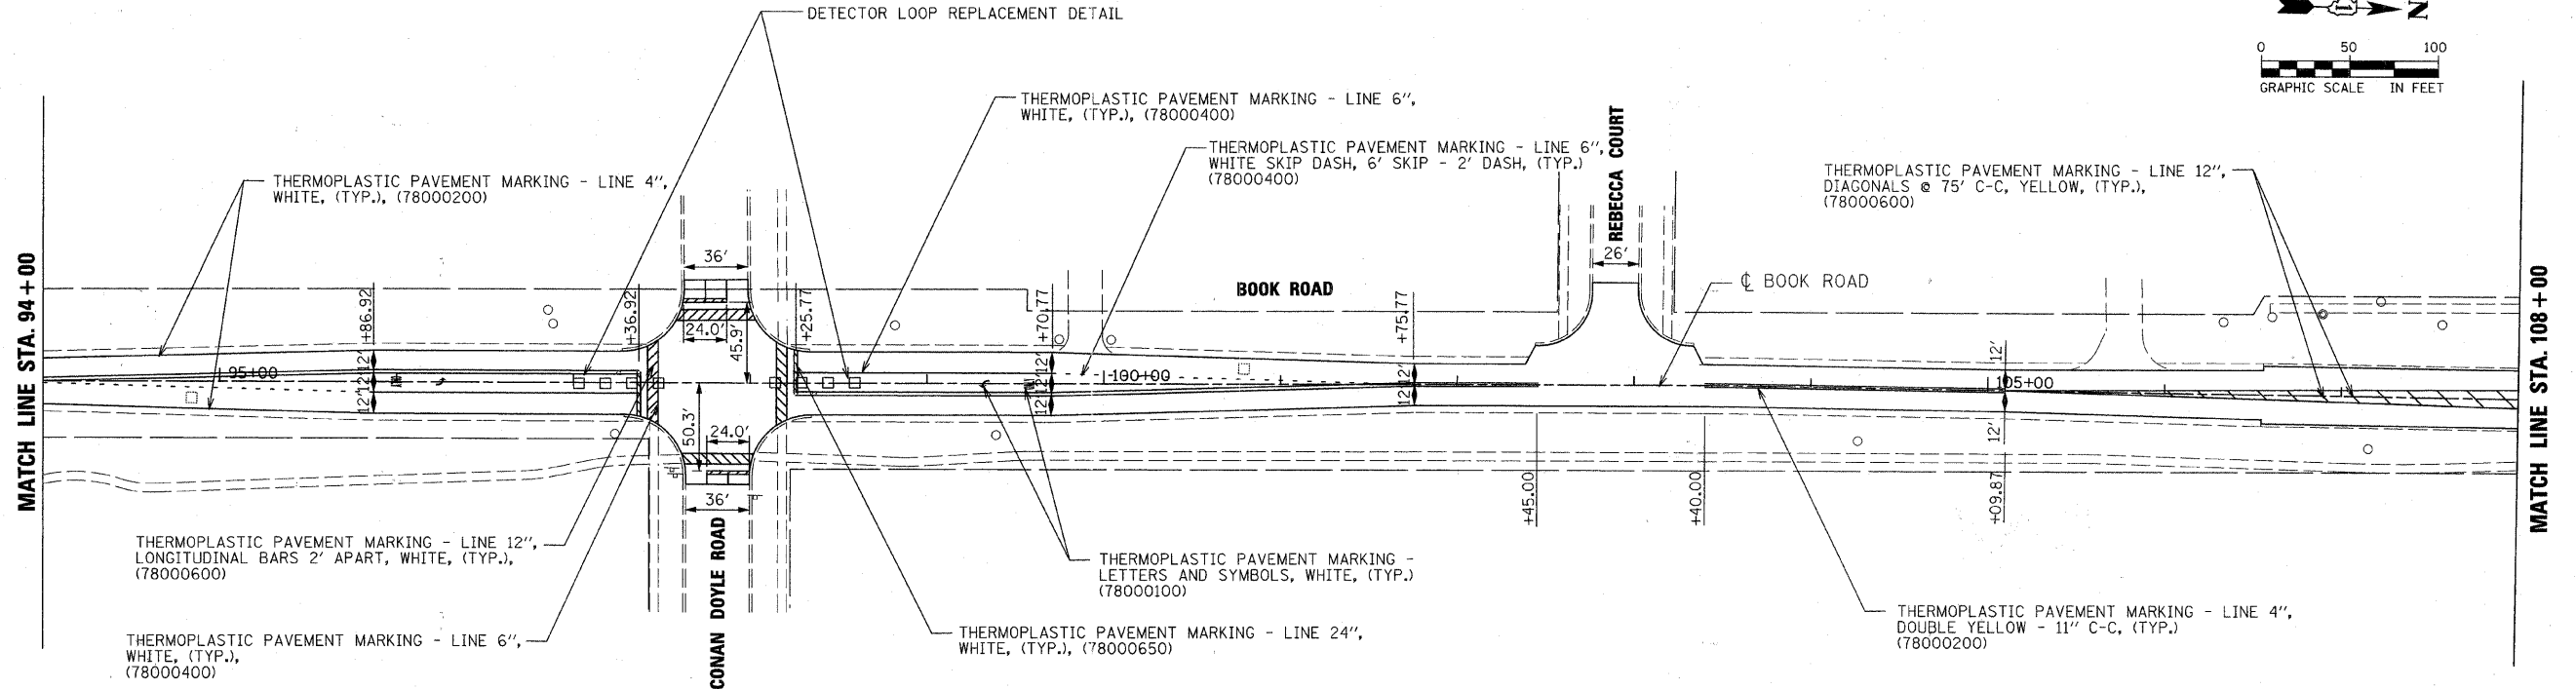


THERMOPLASTIC PAVEMENT MARKING - LINE 4", WHITE, (TYP.), (78000200)

THERMOPLASTIC PAVEMENT MARKING - LINE 12", LONGITUDINAL BARS 2' APART, WHITE, (TYP.), (78000600)



THERMOPLASTIC PAVEMENT MARKING - LINE 6", WHITE, (TYP.), (78000400)

TRAFFIC SIGNAL LEGEND

	PROPOSED	EXISTING
SIGNAL POST		
HANDHOLE		
DETECTOR LOOP		

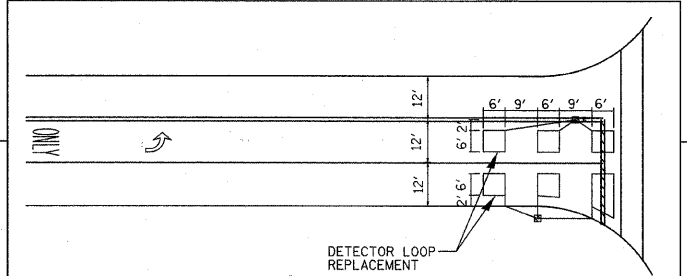

DETECTOR LOOP REPLACEMENT DETAIL
SEE DISTRICT 1 TS-07

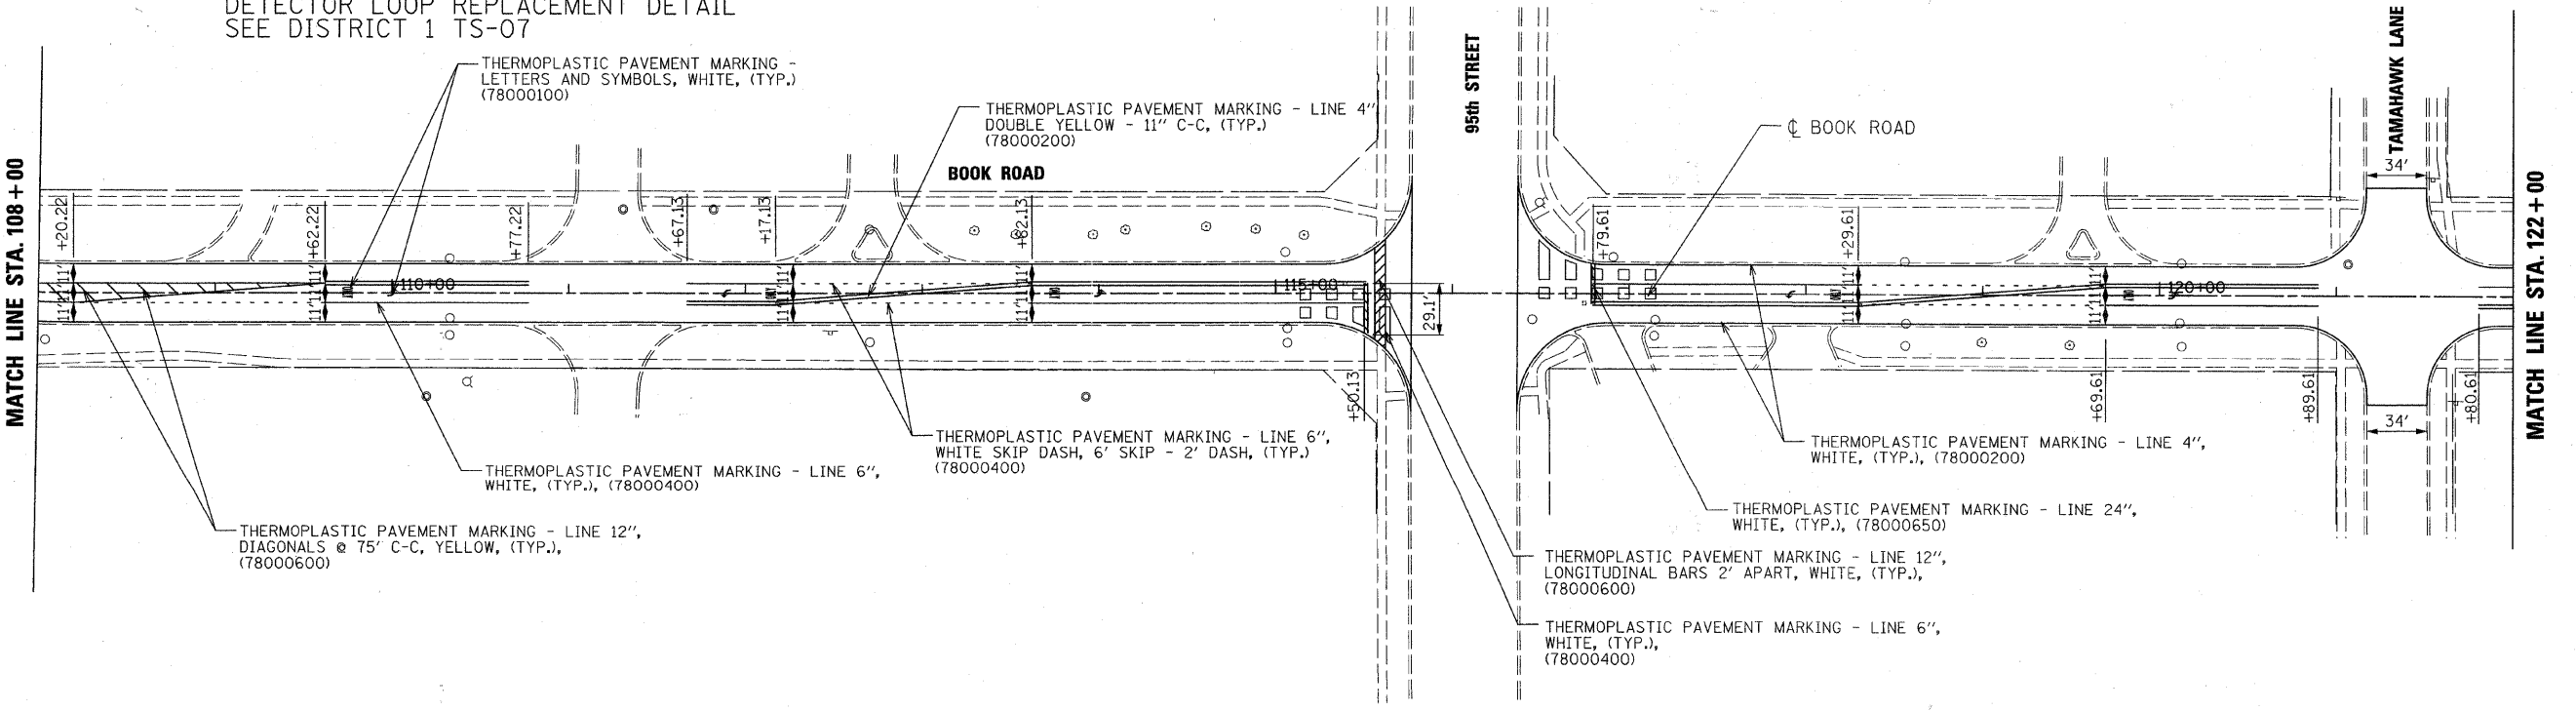

THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS, WHITE, (TYP.), (78000100)

THERMOPLASTIC PAVEMENT MARKING - LINE 4" DOUBLE YELLOW - 11" C-C, (TYP.), (78000200)

THERMOPLASTIC PAVEMENT MARKING - LINE 6", WHITE, (TYP.), (78000400)

THERMOPLASTIC PAVEMENT MARKING - LINE 12", DIAGONALS @ 75' C-C, YELLOW, (TYP.), (78000600)

THERMOPLASTIC PAVEMENT MARKING - LINE 4", WHITE, (TYP.), (78000200)

THERMOPLASTIC PAVEMENT MARKING - LINE 24", WHITE, (TYP.), (78000650)

THERMOPLASTIC PAVEMENT MARKING - LINE 12", LONGITUDINAL BARS 2' APART, WHITE, (TYP.), (78000600)

THERMOPLASTIC PAVEMENT MARKING - LINE 6", WHITE, (TYP.), (78000400)



USER NAME = #USER#	DESIGNED - EVI	REVISED -
PLOT SCALE = 50.0000' / IN.	DRAWN - KJB	REVISED -
PLOT DATE = 11/29/2011 10:18:01 AM	CHECKED - DAK	REVISED -
	DATE - 10/24/2011	REVISED -





STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

**BOOK ROAD
PAVEMENT MARKING PLAN**

SCALE: 1" = 50 ft | SHEET NO. 4 OF 6 SHEETS | STA. 94+00 TO STA. 122+00

F.A.U. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 15
CONTRACT NO. 63659			FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT	

FILE NAME = D:\Nepier\11e_25357584_BookL4PP\Drawings\Drawings\Plan\BookL4.dgn

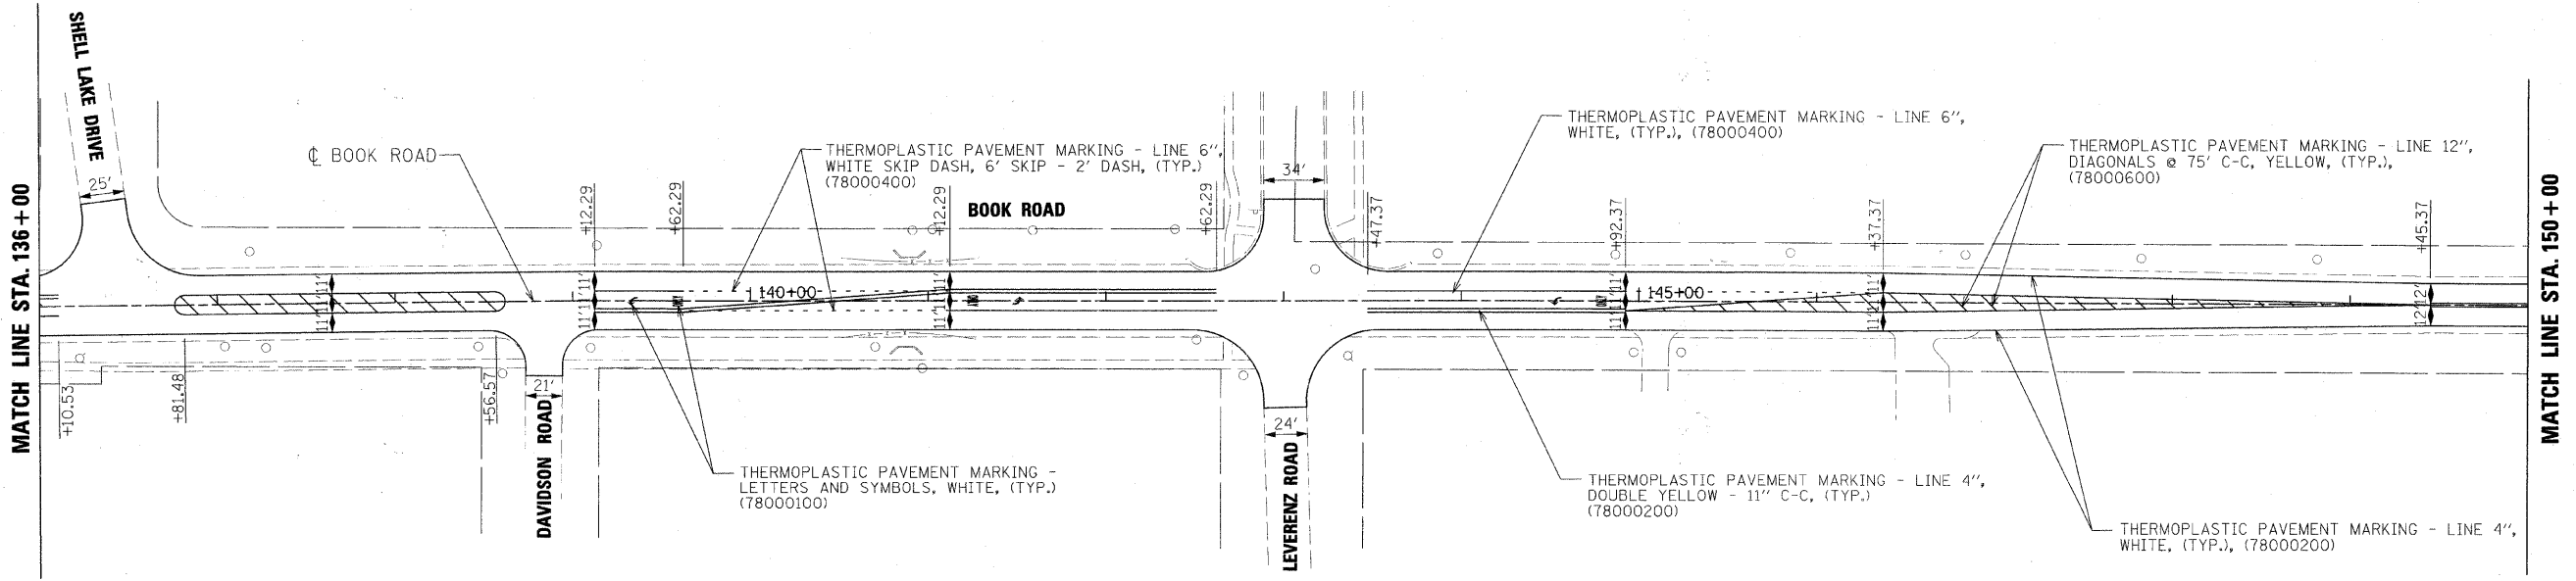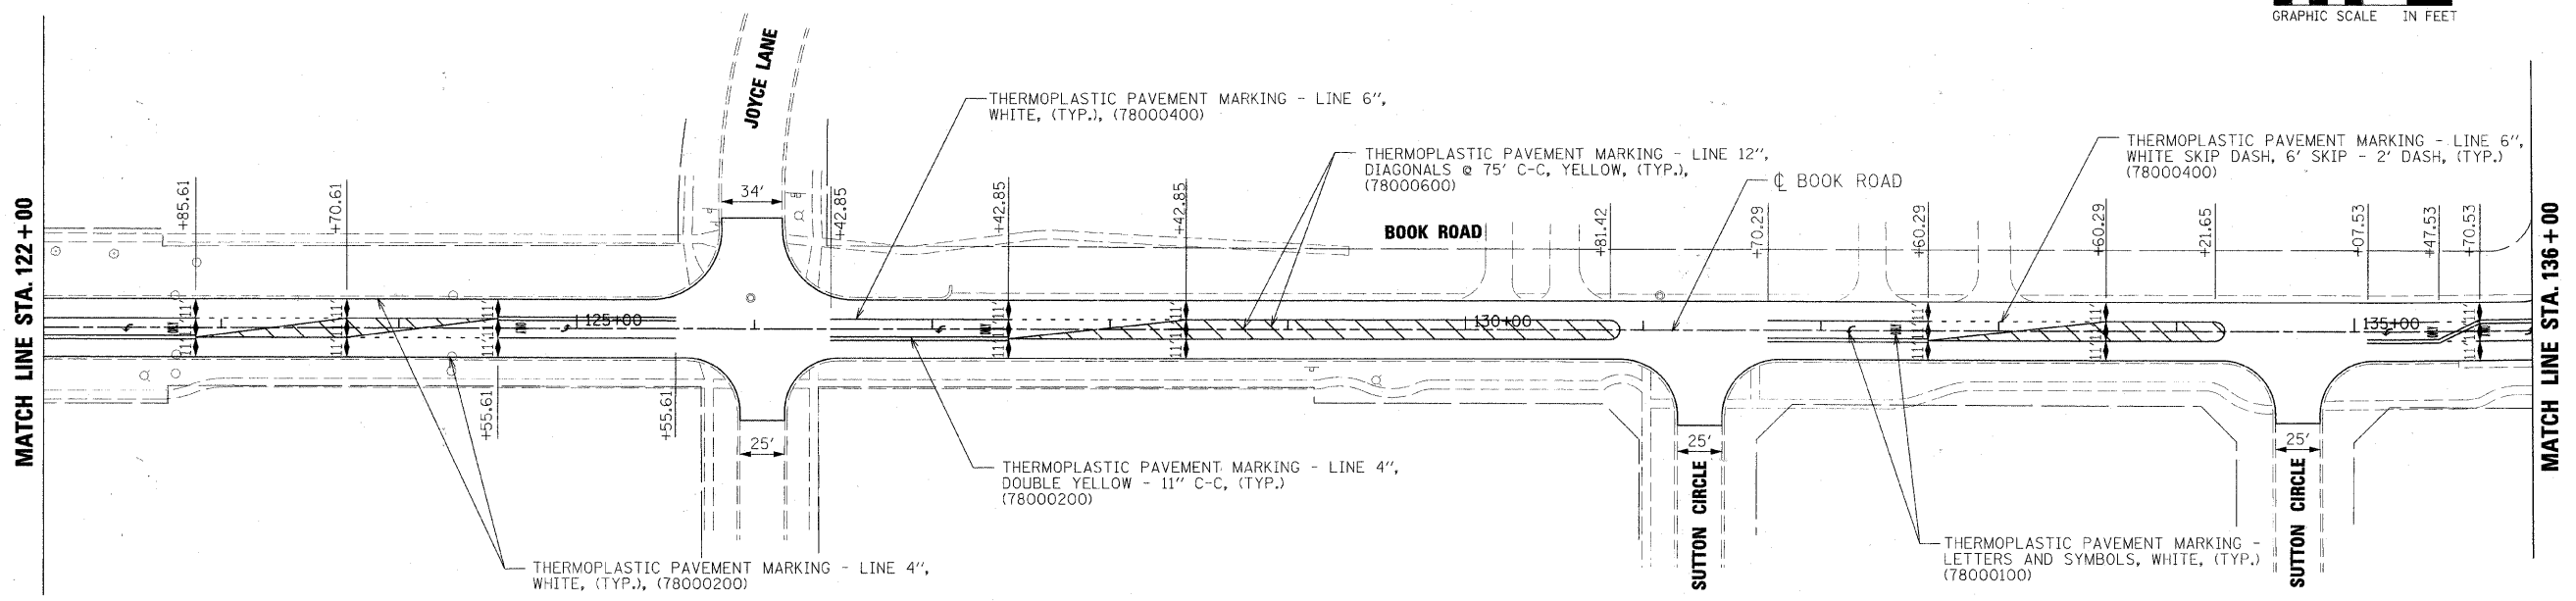

FILE NAME = G:\Work\11a_25587584_Book\Book.dwg; Drawings\Drawings\11a\11a\Book.dwg








USER NAME = #USER#	DESIGNED - EVI	REVISED -
PLOT SCALE = 50.0000' / IN.	DRAWN - KJB	REVISED -
PLOT DATE = 10/11/2011 3:39:07 PM	CHECKED - DAK	REVISED -
	DATE - 10/24/2011	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**BOOK ROAD
PAVEMENT MARKING PLAN**

SCALE: 1" = 50 ft SHEET NO. 5 OF 6 SHEETS STA. 122+00 TO STA. 150+00

F.A.U. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 16
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT			CONTRACT NO. 63659	

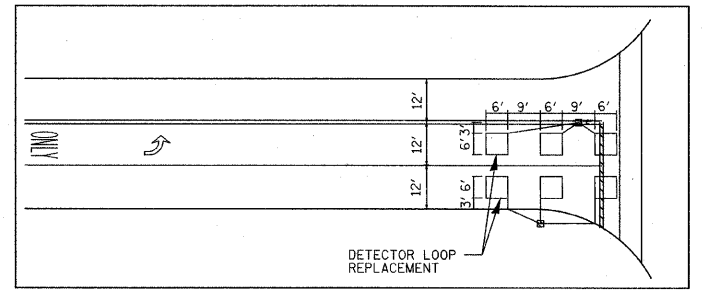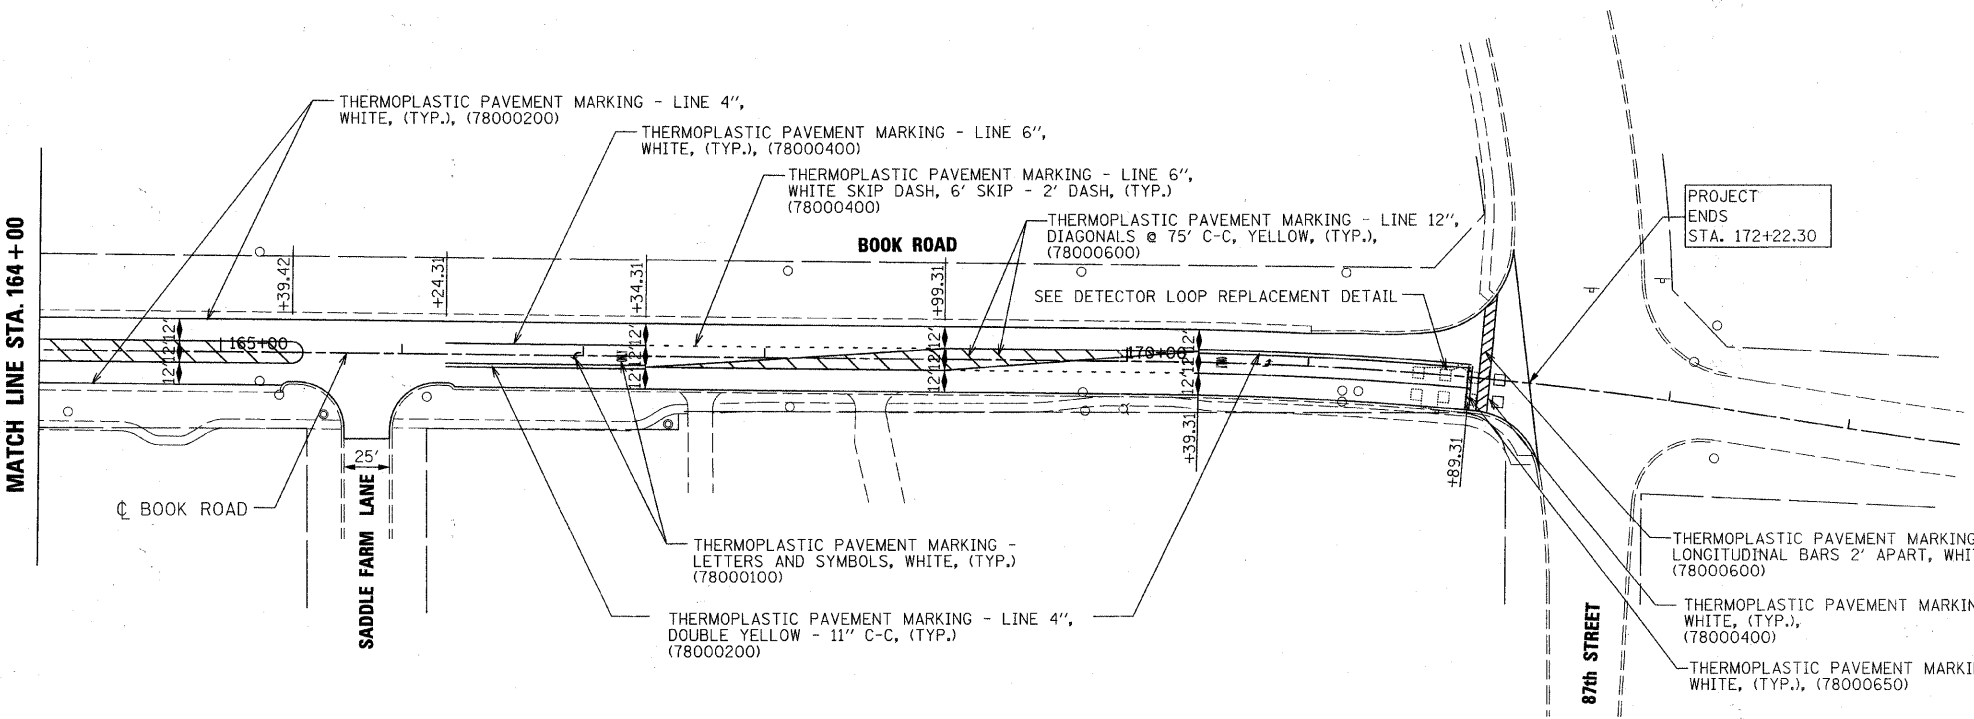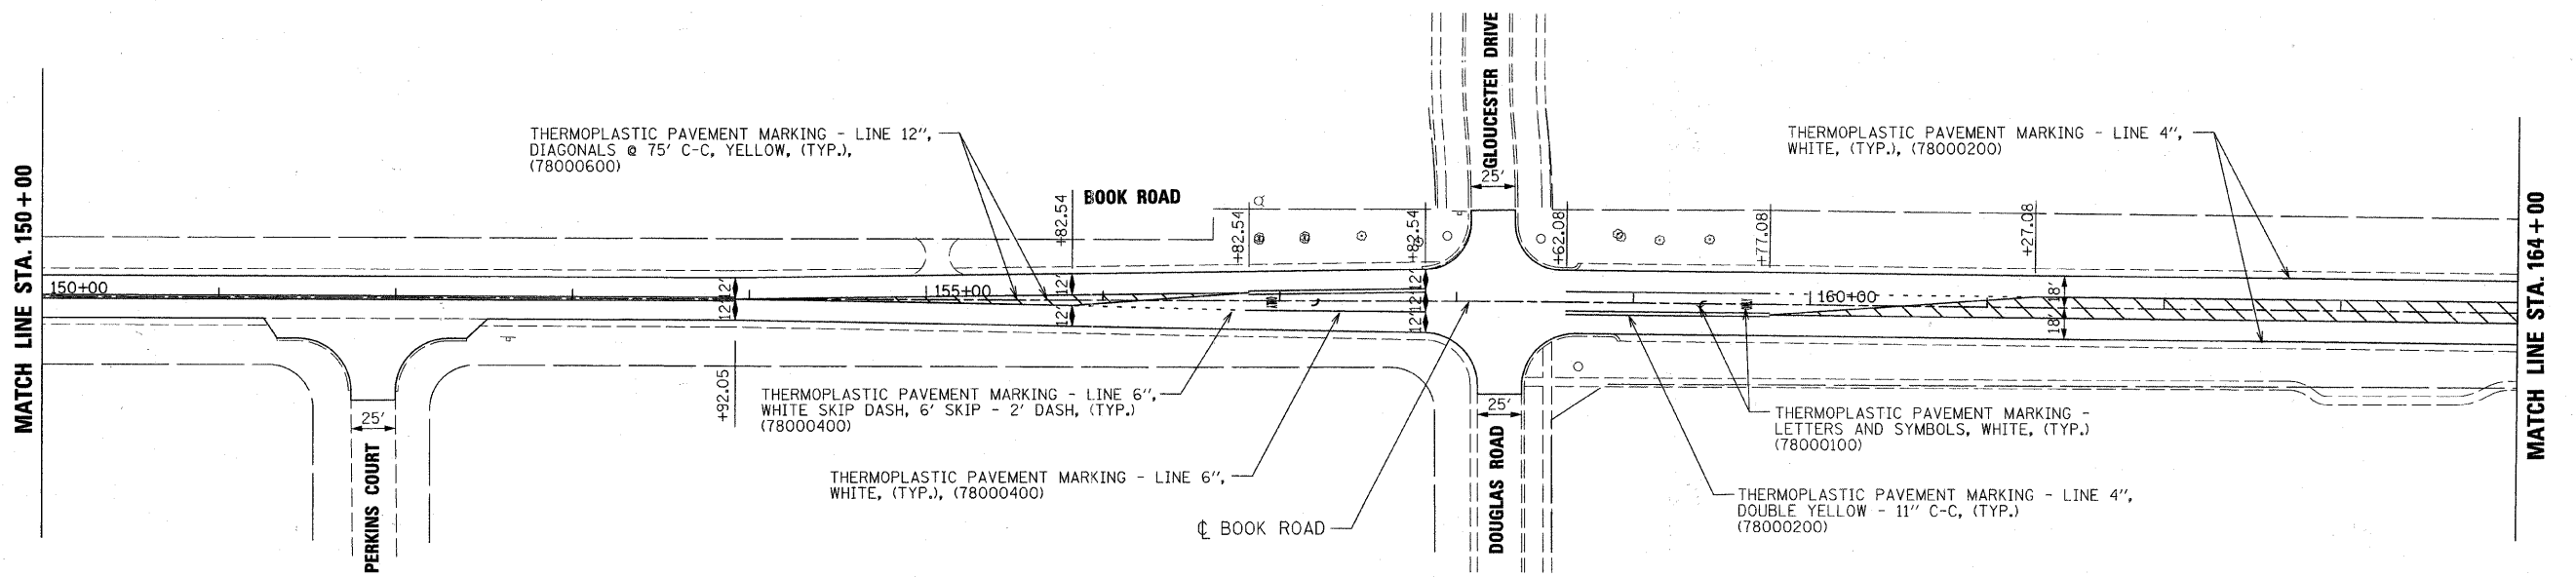

DETECTOR LOOP REPLACEMENT DETAIL
SEE DISTRICT 1 TS-07

TRAFFIC SIGNAL LEGEND

	PROPOSED	EXISTING
SIGNAL POST		⊕
HANDHOLE	⊠	⊠
DETECTOR LOOP	□	□



USER NAME = #USER#	DESIGNED - EVI	REVISED -
PLOT SCALE = 50.0000' / IN.	DRAWN - KJB	REVISED -
PLOT DATE = 11/29/2011 10:16:32 AM	CHECKED - DAK	REVISED -
	DATE - 10/24/2011	REVISED -


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**BOOK ROAD
PAVEMENT MARKING PLAN**


SCALE: 1" = 50 ft SHEET NO. 6 OF 6 SHEETS STA. 150+00 TO STA. 172+22.30

F.A.I.D. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 17
CONTRACT NO. 63659				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				





FILE NAME = G:\Naperville\11e.25567854_BookRoad\BookRoad.dwg

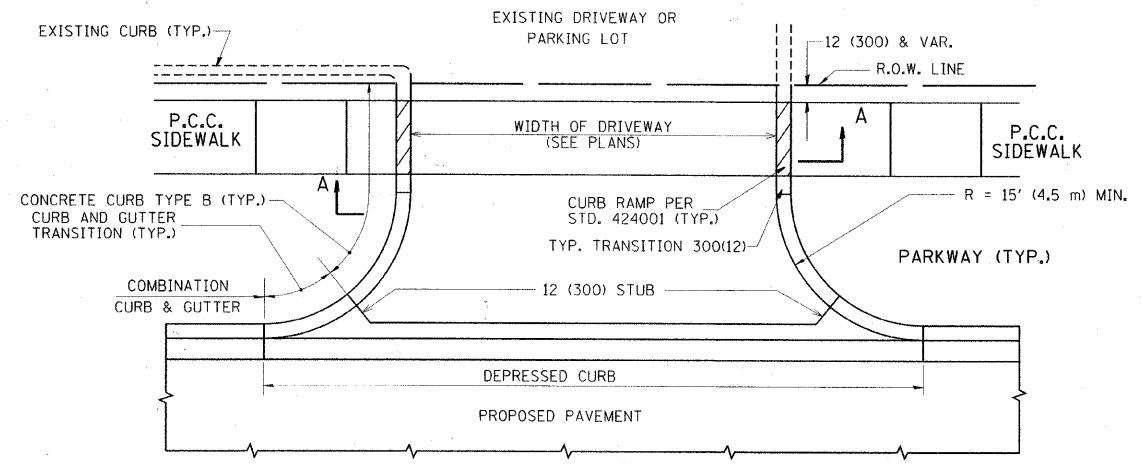

WITH CONCRETE CURB, TYPE B

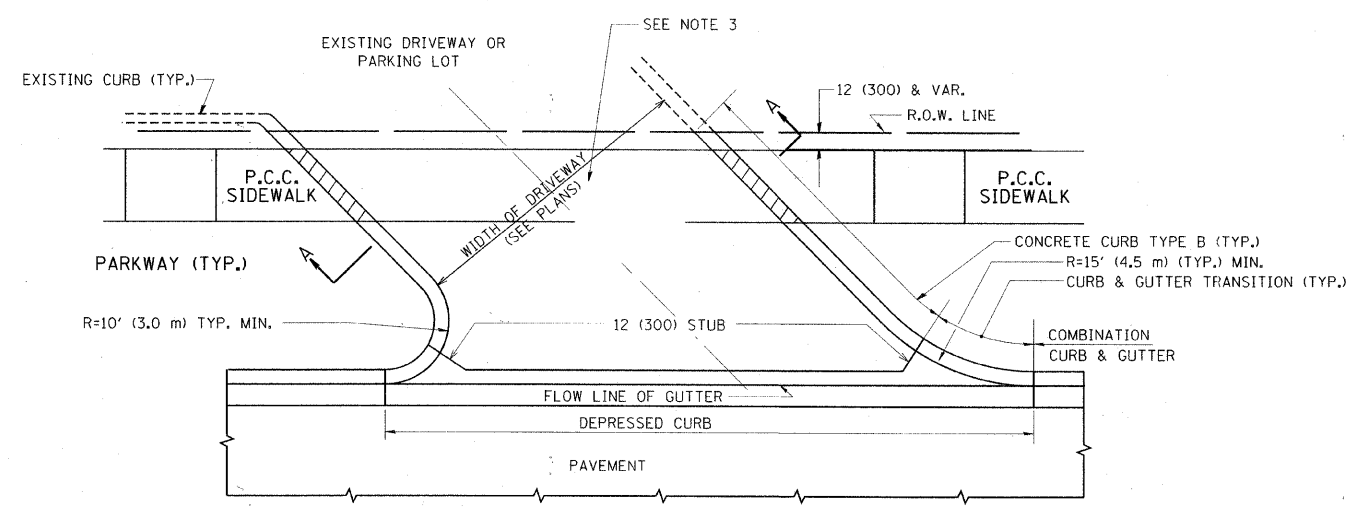

WITH CONCRETE CURB, TYPE B

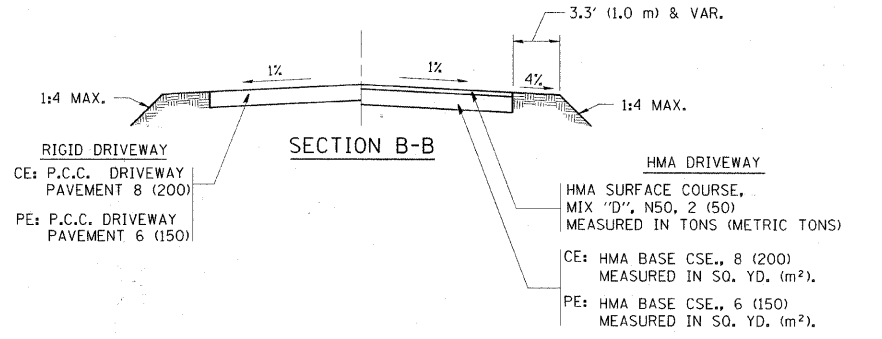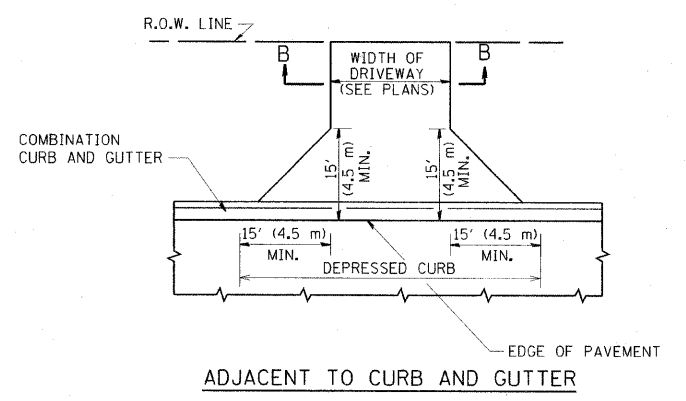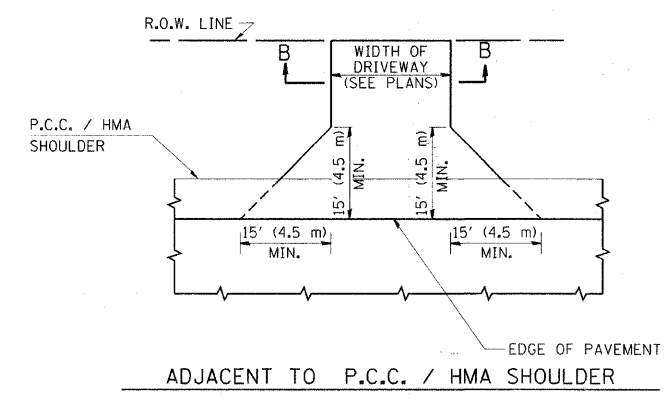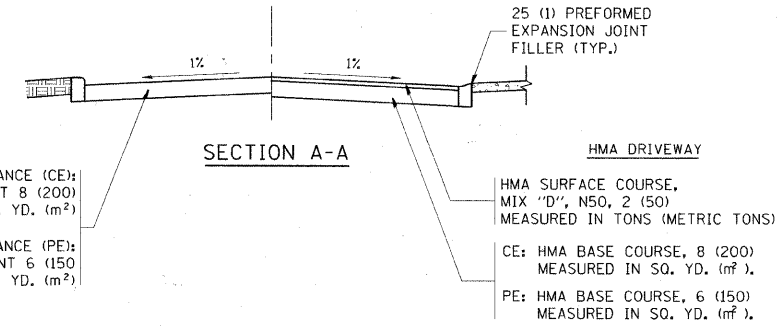

GENERAL NOTES:

DRIVEWAY SLOPES, LOCATIONS, & GEOMETRIC LAYOUT SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE "HANDBOOK FOR POLICY ON PERMITS FOR ACCESS DRIVEWAYS TO STATE HIGHWAYS". FOR FURTHER LAYOUT REQUIREMENTS, REFER TO ILLUSTRATIONS IN THE PERMIT HANDBOOK. DRIVEWAYS SHALL BE REPLACED IN KIND, UNLESS OTHERWISE NOTED ON THE PLANS.

COMMERCIAL DRIVEWAYS SHALL BE CONSTRUCTED WITH CONCRETE CURB, TYPE B RETURNS EXCEPT WHEN THE SIDEWALK EDGE IS 4 FEET (1.2 METERS) OR LESS FROM THE BACK OF CURB, CONSTRUCT A FLARE DRIVEWAY WITHOUT CURB.

THE RESIDENT ENGINEER SHALL CONTACT THE TRAFFIC PERMIT OFFICE AT 847/ 705-4131 FOR ANY QUESTIONS ON DRIVEWAYS SHOWN IN THE PLANS; SPECIFICALLY IN REFERENCE TO ADDITIONAL AND/OR RELOCATION/REMOVAL OF A DRIVEWAY.

COMBINATION CONCRETE CURB & GUTTER SHALL BE MEASURED STRAIGHT ACROSS THE DRIVEWAY. NO ADDITIONAL COMPENSATION WILL BE ALLOWED FOR THE CURB & GUTTER TRANSITION.

1 (25) PREFORMED EXPANSION JOINT FILLER WILL NOT BE PAID SEPARATELY, BUT SHALL BE CONSIDERED INCLUDED IN THE COST OF THE P.C.C. DRIVEWAY PAVEMENT OR P.C.C. SIDEWALK.

WHEN THE P.C.C. SIDEWALK EXTENDS THROUGH THE DRIVEWAY, THE THICKNESS OF THE SIDEWALK IN THE DRIVEWAY AREA SHALL BE THE SAME AS THE DRIVEWAY THICKNESS. SIDEWALK WILL BE PAID FOR AS P.C.C. SIDEWALK OF THE THICKNESS SPECIFIED. SIDEWALK CROSS SLOPE THRU DRIVEWAY AREA TO BE A MAXIMUM OF 1:50.


FILE NAME =	USER NAME = lejso	DESIGNED - R. SHAH	REVISED - P. LOFLUER 04-15-03
01:\pw_work\pedit\lejso\0108315\bd01.dwg		DRAWN -	REVISED - R. BORO 01-01-07
		CHECKED -	REVISED - R. BORO 06-11-08
		DATE - 11-04-95	REVISED - R. BORO 09-06-11

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**


**DRIVEWAY DETAILS - DISTANCE BETWEEN R.O.W.
AND FACE OF CURB & EDGE OF SHOULDER >= 15' (4.5 m)**

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0082	11-00149-00-RS	WILL	30	18
BD0156-07 (BD-01)			CONTRACT NO. 63659	
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				


SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.

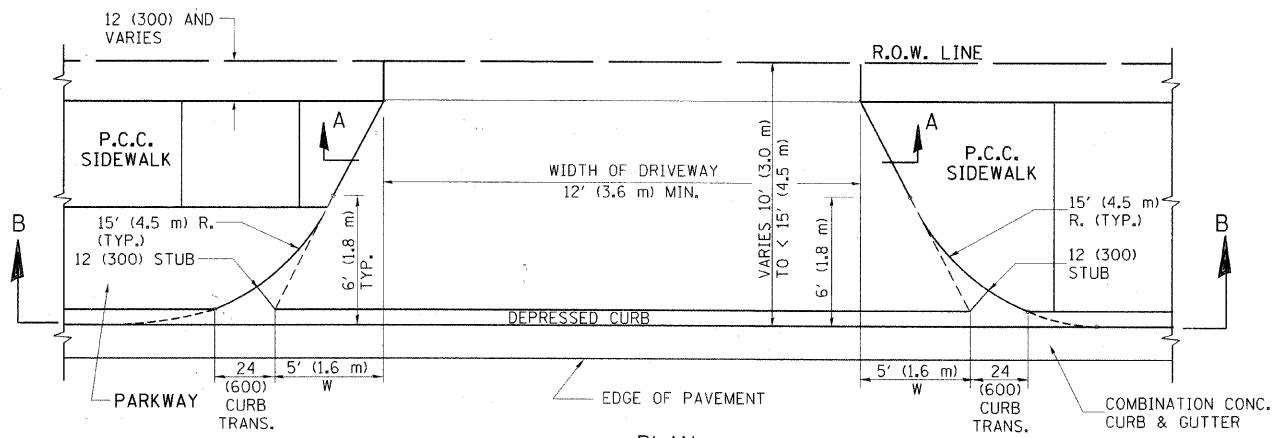


PLAN
10' (3.0 m) TO < 15' (4.5 m)

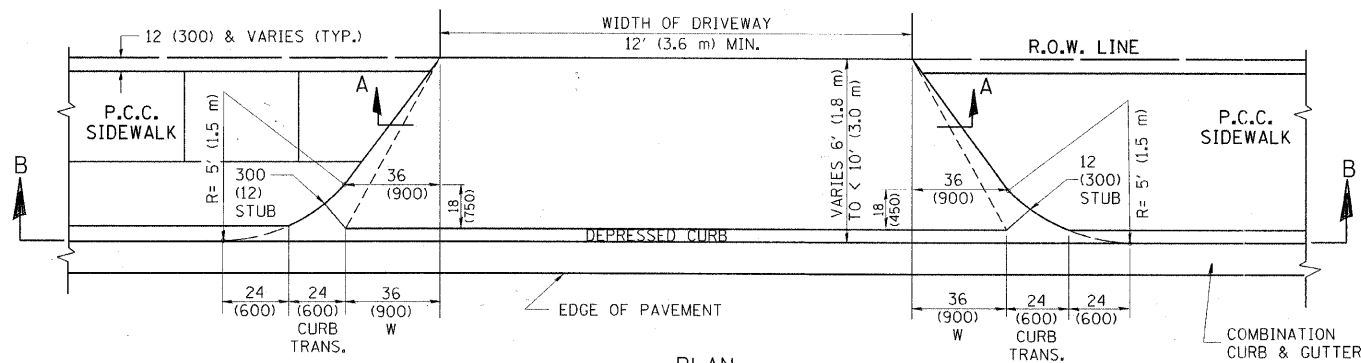


PLAN
6' (1.8 m) TO < 10' (3.0 m)

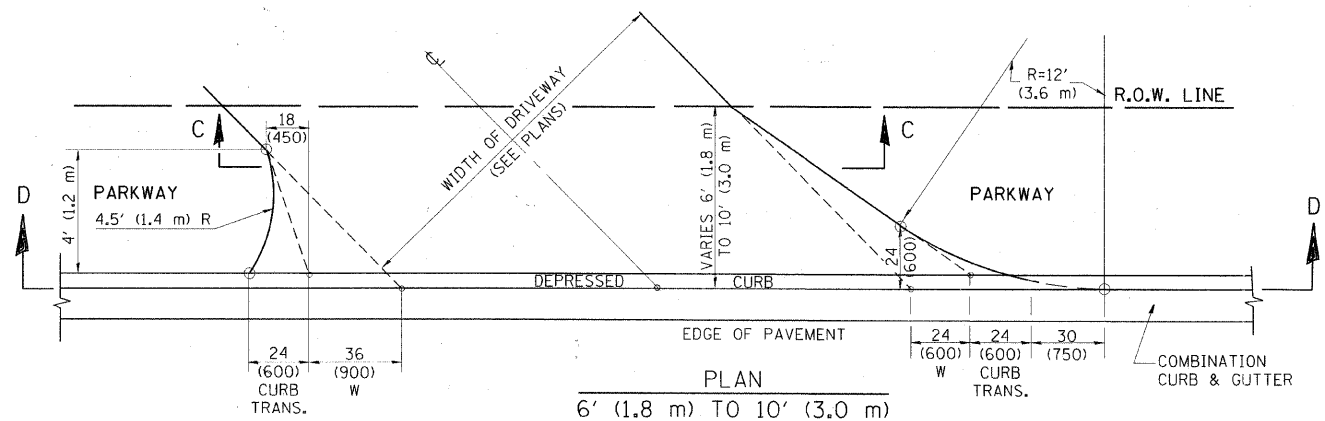


PLAN
6' (1.8 m) TO 10' (3.0 m)

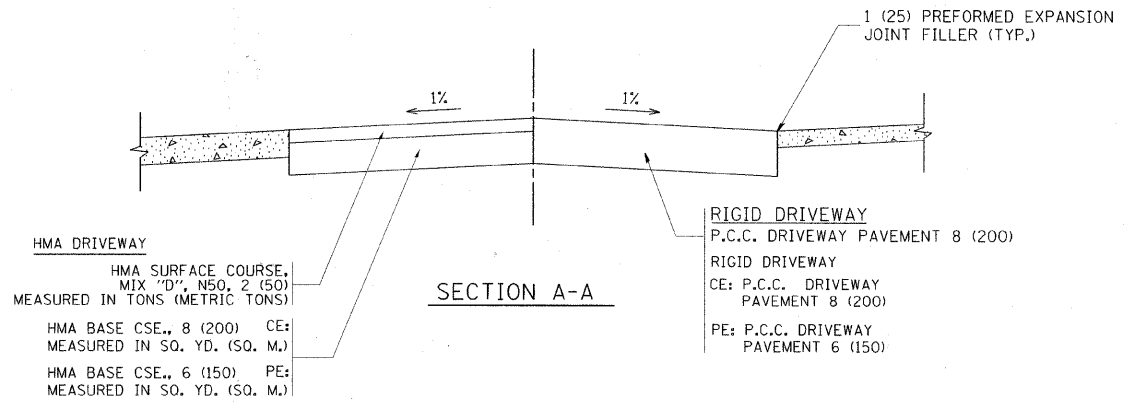


SECTION A-A

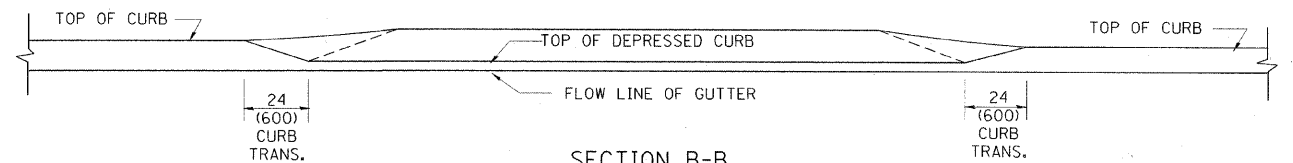

SECTION B-B

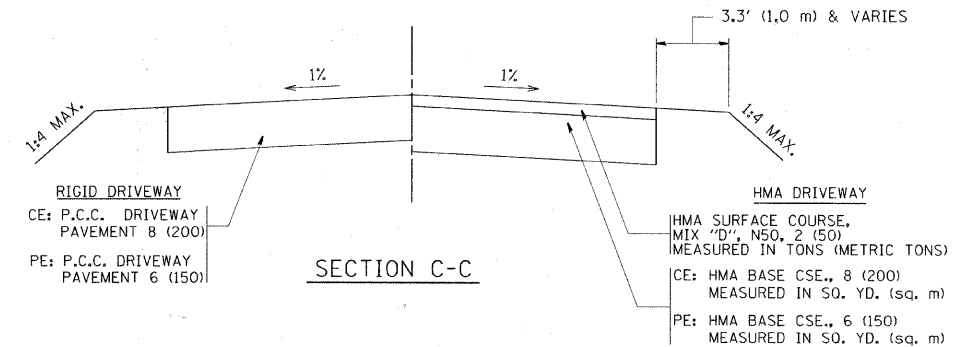

SECTION C-C

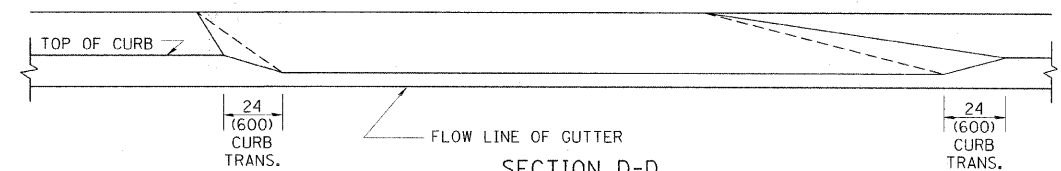

SECTION D-D

GENERAL NOTES

DRIVEWAY SLOPES, LOCATIONS, & GEOMETRIC LAYOUT SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE "HANDBOOK FOR POLICY ON PERMITS FOR ACCESS DRIVEWAYS TO STATE HIGHWAYS". FOR FURTHER LAYOUT REQUIREMENTS, REFER TO ILLUSTRATION 10 IN THE PERMIT HANDBOOK. WHERE SIDEWALKS EXIST, DRIVEWAYS SHALL BE REPLACED WITH RIGID PAVEMENT. WHERE NO SIDEWALKS EXIST, DRIVEWAYS SHALL BE REPLACED IN KIND. SIDEWALK CROSS SLOPE THRU DRIVEWAY AREA TO BE A MAXIMUM OF 1:50.

WHEN THE DISTANCE BETWEEN R.O.W. AND THE BACK OF CURB IS EQUAL TO OR LESS THAN 8' (2.4 m), THE P.C.C. SIDEWALK SHALL EXTEND TO THE BACK OF CURB.

THE RESIDENT ENGINEER SHALL CONTACT THE TRAFFIC PERMIT OFFICE AT 847/ 705-4131 FOR ANY QUESTIONS ON DRIVEWAYS SHOWN IN THE PLANS; SPECIFICALLY IN REFERENCE TO ADDITIONAL AND/OR RELOCATION/REMOVAL OF A DRIVEWAY.

COMBINATION CONCRETE CURB & GUTTER SHALL BE MEASURED STRAIGHT ACROSS THE DRIVEWAY. NO ADDITIONAL COMPENSATION WILL BE ALLOWED FOR THE CURB & GUTTER TRANSITION.

THE 1 (25) PREFORMED EXPANSION JOINT FILLER WILL NOT BE PAID SEPARATELY, BUT SHALL BE CONSIDERED INCLUDED IN THE COST OF THE P.C.C. DRIVEWAY PAVEMENT OR P.C.C. SIDEWALK.

"W" VARIES FROM 36 (900) TO 5' (1.5 m) PROPORTIONAL TO THE LENGTH (L), FROM 6' (1.8 m) TO 10' (3 m).

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE NOTED.

FILE NAME =	USER NAME = jeyso	DESIGNED - R. SHAH	REVISED - M. GOMEZ 04-06-01
ca:\pwwork\pwwork\1eysa\10188315\bd02.dwg		DRAWN -	REVISED - P. LAFLEUR 04-15-03
	PLOT SCALE = 50,0000 1/16"	CHECKED -	REVISED - R. BORO 01-01-07
	PLOT DATE = 9/6/2011	DATE - 11-06-95	REVISED - R. BORO 01-01-07


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DRIVEWAY DETAILS

DISTANCE BETWEEN ROW AND FACE OF CURB < 15' (4.5 m)

SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0082	11-00149-00-RS	WILL	30	19
BD400-02 (BD-02)			CONTRACT NO. 63659	
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

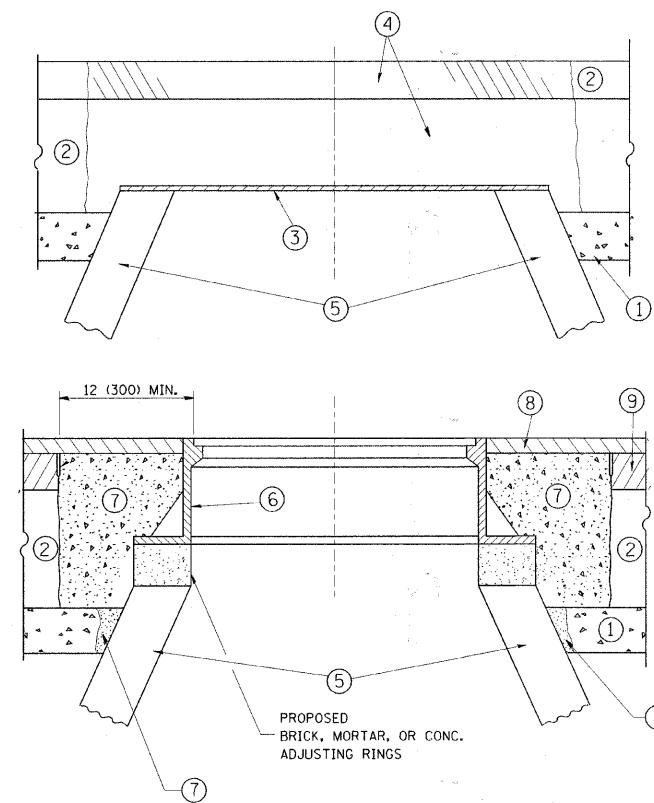

CONSTRUCTION PROCEDURES

STAGE 1 (BEFORE PAVEMENT MILLING)

- A) REMOVE A MINIMUM OF 12 (300) OF THE PAVEMENT FROM AROUND THE STRUCTURE.
- B) REMOVE THE EXISTING FRAME AND LID FROM THE STRUCTURE.
- C) COVER THE STRUCTURE OPENING WITH A 36 (900) DIAMETER METAL PLATE.
- D) BACKFILL WITH CRUSHED STONE AND A MINIMUM 1/2 (40) THICK HMA SURFACE MIX APPROVED BY THE ENGINEER.

STAGE 2 (AFTER PAVEMENT MILLING)

- A) REMOVE THE HMA SURFACE MIX AND CRUSHED STONE.
- B) INSTALL THE FRAME AND LID; ADJUST THE FRAME TO ITS FINAL SURFACE ELEVATION.
- C) THE SURROUNDING SPACE SHALL BE FILLED WITH CLASS PP-1* CONCRETE TO THE ELEVATION OF THE SURFACE OF THE EXISTING BASE COURSE OR THE BINDER COURSE.

*UNLESS OTHERWISE SPECIFIED IN THE PLANS.

THE PROCEDURE EXPLAINED ABOVE SHALL CONFORM TO THE APPLICABLE PORTIONS OF SECTIONS 353, 406, 602, AND 603 OF THE STANDARD SPECIFICATIONS.

LEGEND

- ① SUB-BASE GRANULAR MATERIAL
- ② EXISTING PAVEMENT
- ③ 36 (900) DIAMETER METAL PLATE
- ④ PROPOSED CRUSHED STONE AND HMA SURFACE MIX
- ⑤ EXISTING STRUCTURE
- ⑥ FRAME AND LID (SEE NOTES)
- ⑦ CLASS PP-1* CONCRETE
- ⑧ PROPOSED HMA SURFACE COURSE
- ⑨ PROPOSED HMA BINDER COURSE

LOCATION OF STRUCTURES:

THE CONTRACTOR WILL BE REQUIRED TO KEEP A RECORD OF THE LOCATIONS OF THE BURIED STRUCTURES ACCORDING TO THE STATION AND DISTANCE LEFT OR RIGHT OF THE CENTERLINE OF PAVEMENT. UPON COMPLETION OF THE WORK, THE CONTRACTOR WILL DELIVER THE RECORD TO THE ENGINEER.

BASIS OF PAYMENT: THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER EACH FOR "FRAMES AND LIDS TO BE ADJUSTED, SPECIAL" NEW FRAMES AND LIDS, WHEN SPECIFIED, WILL BE PAID FOR SEPARATELY.

NOTES:

EXISTING BROKEN FRAMES AND LIDS SHALL BE REMOVED AND DISPOSED OF BY THE CONTRACTOR AND SHALL BE REPLACED AS DIRECTED BY THE ENGINEER. REPLACEMENT FRAMES AND LIDS WILL BE PAID FOR IN ACCORDANCE WITH ARTICLE 109.04 OF THE STANDARD SPECIFICATIONS UNLESS A SEPARATE PAY ITEM HAS BEEN PROVIDED.

IF THE EXISTING LIDS ARE OPEN, THE FRAME WILL BE ADJUSTED TO THE ELEVATION OF THE MILLED PAVEMENT SURFACE PRIOR TO THE MILLING OPERATION. THE FRAME WILL NOT BE REMOVED AND COVERED BY THE METAL PLATE.

CITY OF CHICAGO CASTINGS ARE THE PROPERTY OF THE CITY AND THE CONTRACTOR SHALL NOTIFY THE CITY FOR REMOVAL AND DISPOSITION OF THE CASTINGS.


THE METAL PLATE USED TO COVER THE STRUCTURE SHALL REMAIN THE PROPERTY OF THE CONTRACTOR.

WHEN STRUCTURES ARE TO BE ADJUSTED OR RECONSTRUCTED, THE LOWERING AND RAISING OF THE FRAMES AND LIDS WILL NOT BE PAID FOR SEPARATELY BUT WILL BE INCLUDED IN THE COST OF THE CORRESPONDING PAY ITEM.

DETAILS FOR FRAMES AND LIDS ADJUSTMENT WITH MILLING

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN

FILE NAME =	USER NAME = lsgso	DESIGNED - R. SHAH	REVISED - A. ABBAS 03-21-97	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	DETAILS FOR FRAMES AND LIDS ADJUSTMENT WITH MILLING	F.A.U. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 20	
	PLOT SCALE = 45,9999 1/ IN.	CHECKED -	REVISED - R. WIEDEMAN 05-14-04		SCALE: NONE	SHEET NO. 1 OF 1 SHEETS	STA. TO STA.	BD600-03 (BD-8) CONTRACT NO. 63659			
	PLOT DATE = 3/18/2011	DATE - 10-25-94	REVISED - R. BORO 01-01-07		FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT						
			REVISED - R. BORO 03-09-11								

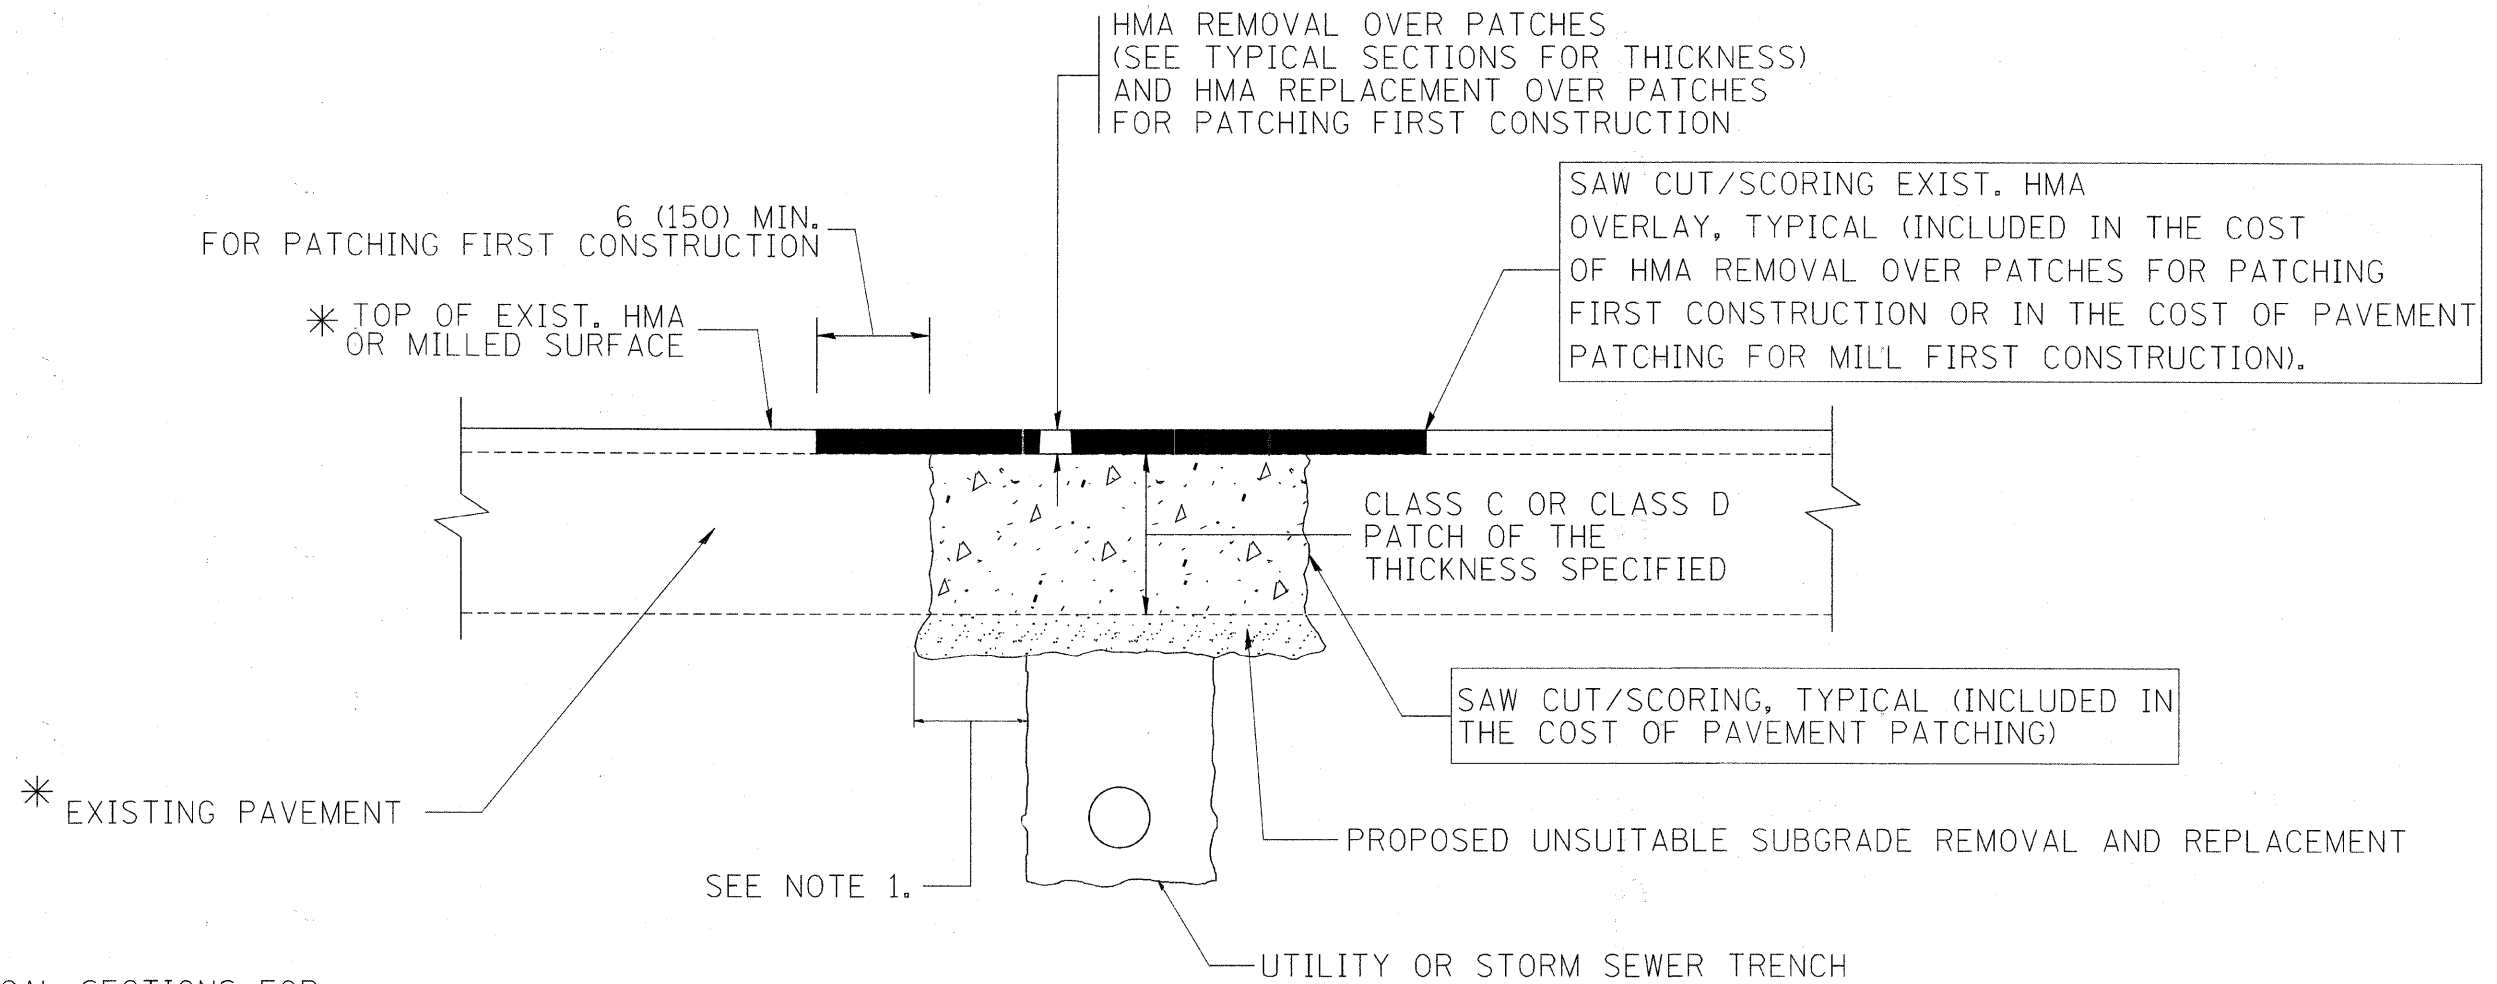

* SEE TYPICAL SECTIONS FOR THICKNESS AND MATERIALS

NOTES:

1. THE WIDTH OF THE FULL DEPTH PATCH OVER A TRENCH SHALL BE 12 (300) WIDER ON EACH SIDE OF THE TRENCH.
2. FOR METHOD OF MEASUREMENT AND BASIS OF PAYMENT, SEE RECURRING SPECIAL PROVISION "PATCHING WITH HOT-MIX ASPHALT OVERLAY REMOVAL".

SEQUENCE OF CONSTRUCTION (PATCHING FIRST)


1. REMOVE THE EXISTING HMA MATERIAL OVER THE AREA TO BE PATCHED.
2. REMOVE AND REPLACE WITH CLASS C OR D PATCH.
3. REPLACE HMA MATERIAL OVER THE AREA TO BE PATCHED.

SEQUENCE OF CONSTRUCTION (MILLING FIRST)

1. MILL HMA FIRST IF THERE IS AT LEAST 4 1/2 INCHES OR MORE OF HMA MATERIAL ON TOP OF THE EXISTING PAVEMENT OR IF THE PAVEMENT IS FULL DEPTH HMA. A MINIMUM OF 2 INCHES OF HMA MATERIAL SHALL BE IN PLACE AFTER MILLING.
2. REMOVE AND REPLACE WITH FULL DEPTH CLASS D PATCHES TO TOP OF MILLED SURFACE.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

FILE NAME = c:\projects\dstsd22x34\bd22.dgn	USER NAME = bauerdl	DESIGNED - R. SHAH	REVISED - A. ABBAS 04-27-98	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PAVEMENT PATCHING FOR HMA SURFACED PAVEMENT			F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED - R. BORO 01-01-07		0082	11-00149-00-RS	WILL	30	21			
		PLOT SCALE = 50,000' / IN.	REVISED - R. BORO 09-04-07		BD400-04 (BD-22)			CONTRACT NO. 63659				
		PLOT DATE = 10/27/2008	REVISED - K. ENG 10-27-08		SCALE: NONE	SHEET NO. 1 OF 1 SHEETS	STA.	TO STA.	FED. ROAD DIST. NO. 1 [ILLINOIS] FED. AID PROJECT			

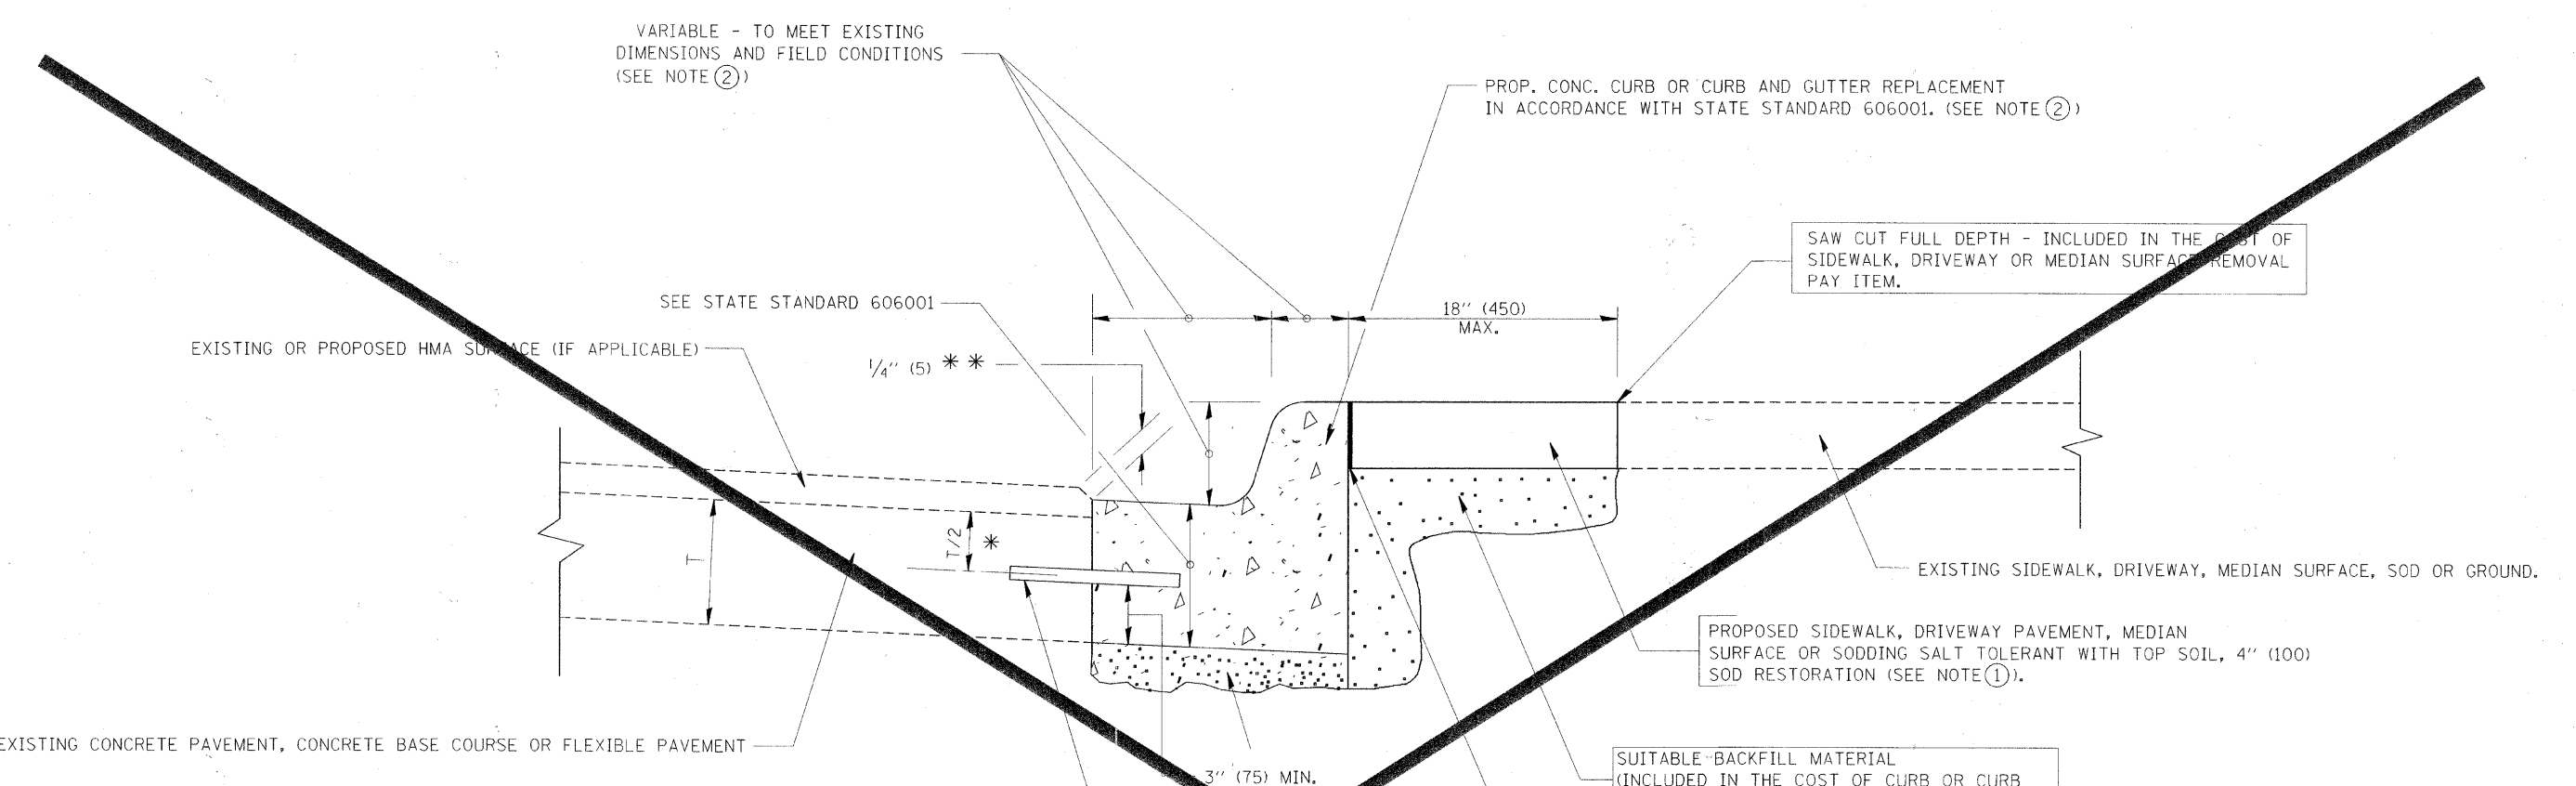

- * 3" (75) MINIMUM FROM TOP AND BOTTOM OF THE CONCRETE PAVEMENT OR BASE COURSE.
- * * IF THE FINAL SURFACE OF THE PAVEMENT IS CONCRETE, THE GUTTER IS TO BE FLUSH WITH THE PAVEMENT.

- NOTE: ① SIDEWALK, DRIVEWAY PAVEMENT OR MEDIAN SURFACE SHALL BE SIMILAR TO THE MATERIAL BEING REMOVED AND WILL BE PAID FOR SEPARATELY.
SODDING, SALT TOLERANT AND TOP SOIL, FURNISH AND PLACE 4" WILL BE PAID FOR SEPARATELY.
- ② FERTILIZER FOR THE PLACEMENT OF THE SOD IS NOT REQUIRED
- ③ CURB OR CURB AND GUTTER REPLACEMENT SHALL MATCH THE SHAPE OF THE EXISTING CURB OR CURB AND GUTTER UNLESS OTHERWISE SPECIFIED.
- ④ FOR CURB OR CURB AND GUTTER REMOVAL AND REPLACEMENT ADJACENT TO FLEXIBLE PAVEMENT DELETE EPOXY COATED TIE BARS.
- ⑤ LONGITUDINAL BARS, IF ENCOUNTERED IN THE EXISTING CURB OR CURB AND GUTTER, ARE NOT TO BE REPLACED. CUTTING AND REMOVING LONGITUDINAL BARS SHALL BE INCLUDED IN THE COST OF CURB OR CURB AND GUTTER REMOVAL AND REPLACEMENT.
- ⑥ THE COST OF HMA SURFACE REMOVAL IN THE EXISTING GUTTER FLAG SHALL BE INCLUDED IN THE COST OF THE CURB AND GUTTER REMOVAL AND REPLACEMENT.
- ⑦ THE REMOVAL AND REPLACEMENT OF THE EXISTING CURB OR CURB AND GUTTER SHALL BE DONE IN ACCORDANCE WITH THE APPLICABLE PORTIONS OF SECTION 440 AND 606 OF THE STANDARD SPECIFICATIONS.
- ⑧ THE LOCATIONS OF REMOVAL AND REPLACEMENT OF EXISTING CURB OR CURB AND GUTTER SHALL BE DETERMINED BY THE RESIDENT ENGINEER AT THE TIME OF CONSTRUCTION.

PROPOSED 3/4" (20) PREFORMED EXPANSION JOINT AT CONCRETE SIDEWALKS, DRIVEWAYS, AND MEDIANS. (INCLUDED IN THE COST OF CURB OR CURB AND GUTTER REMOVAL AND REPLACEMENT.)

UNSUITABLE SUB-BASE MATERIAL TO BE REMOVED, IF DIRECTED BY THE ENGINEER, SHALL BE REPLACED WITH EITHER SUB-BASE GRANULAR MATERIAL, TYPE B OR ADDITIONAL THICKNESS OF CONCRETE.

REMOVAL AND REPLACEMENT 4" (100) OR LESS IS INCLUDED IN THE COST OF CURB OR CURB AND GUTTER REMOVAL AND REPLACEMENT.

REMOVAL AND REPLACEMENT IN EXCESS OF 4" (100) WILL BE PAID FOR IN ACCORDANCE WITH ARTICLE 109.04 OF THE STANDARD SPECIFICATIONS.


PROPOSED #6 (20) EPOXY COATED TIE BARS 24" (600) LONG AT 24" (600) CENTERS WILL NOT BE PAID FOR SEPARATELY. DELETE EPOXY COATED TIE BARS IF EXISTING TIE BARS ARE USUABLE AS DETERMINED BY THE ENGINEER. (SEE NOTE ③).

BASIS OF PAYMENT:
THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER FOOT (METER) FOR "CURB REMOVAL AND REPLACEMENT" OR "COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND REPLACEMENT".

CURB OR CURB AND GUTTER REMOVAL AND REPLACEMENT


ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

FILE NAME =	USER NAME = drvakosgn	DESIGNED - A. HOUSEH	REVISED - R. SHAH 10-03-96	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	CURB OR CURB AND GUTTER REMOVAL AND REPLACEMENT	F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
		DRAWN -	REVISED - A. ABBAS 03-21-97			0082	11-00149-00-RS	WILL	30	22	
	PLOT SCALE = 50,000 1/4 IN.	CHECKED -	REVISED - M. GOMEZ 01-22-01			BD600-06 (BD-24)					
	PLOT DATE = 12/15/2009	DATE - 03-11-94	REVISED - R. BORO 12-15-09			CONTRACT NO.					
						SCALE: NONE		SHEET NO. 1 OF 1 SHEETS		STA. TO STA.	
FED. ROAD DIST. NO. 1 (ILLINOIS) FED. AID PROJECT											

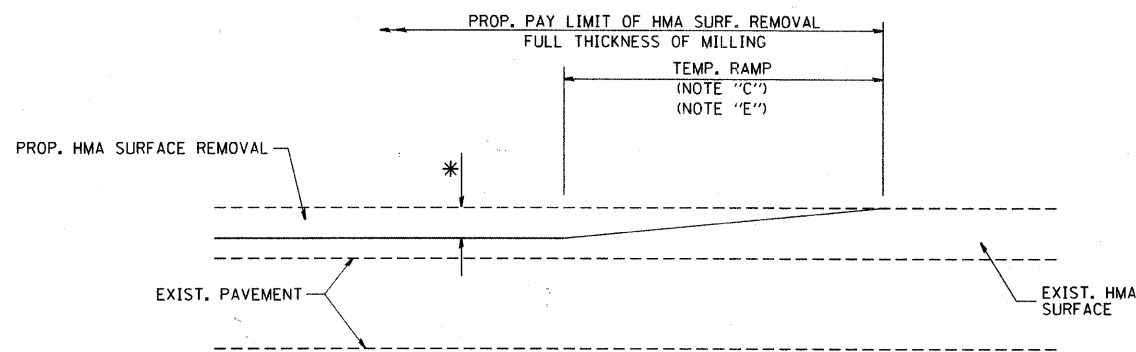

MILLED TEMPORARY RAMP
(FOR BUTT JOINT AND HMA TAPER SEE DETAIL BELOW)


OPTION 1

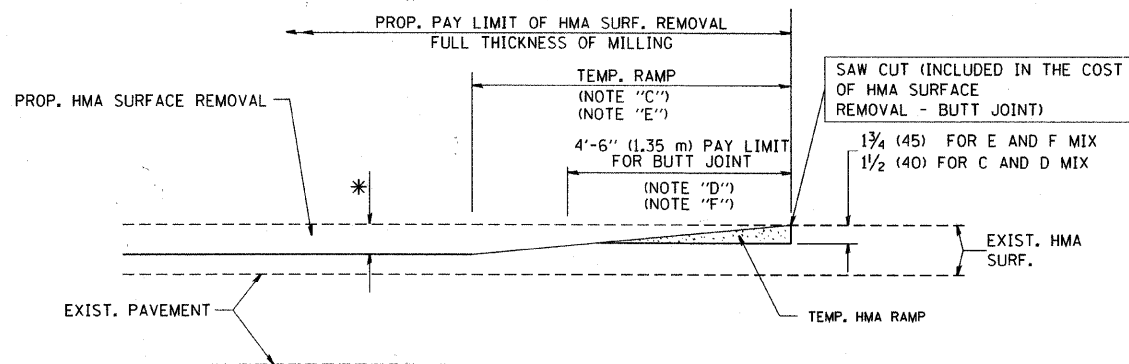


HMA CONSTRUCTED TEMPORARY RAMP
(FOR BUTT JOINT AND HMA TAPER SEE DETAIL BELOW)

OPTION 2


TYPICAL TEMPORARY RAMP

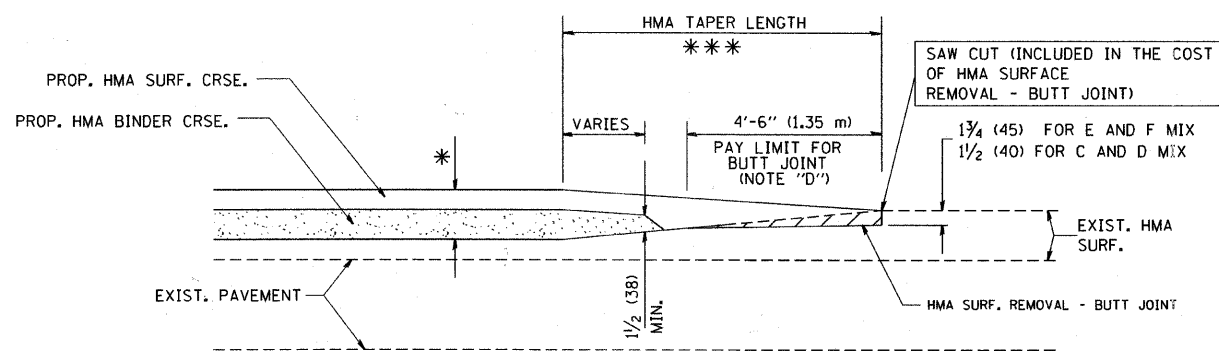

BUTT JOINT AND HMA TAPER
TYPICAL BUTT JOINT AND HMA TAPER
FOR MILLING AND RESURFACING

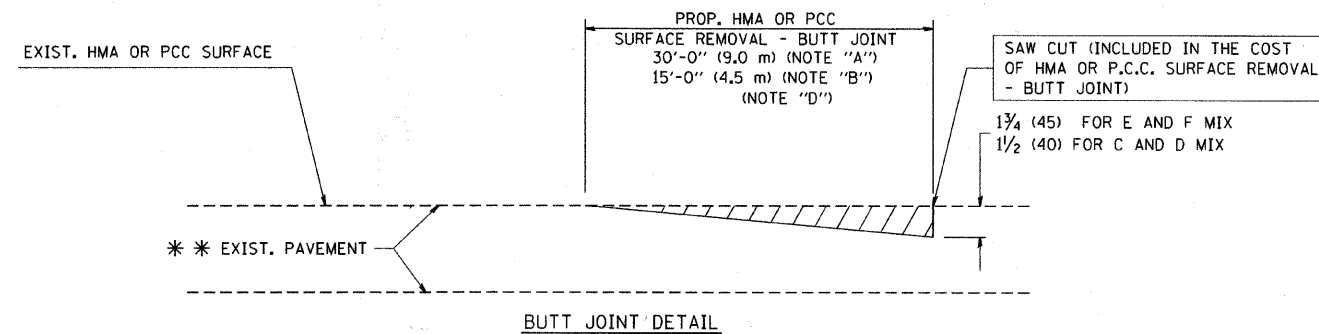

BUTT JOINT DETAIL

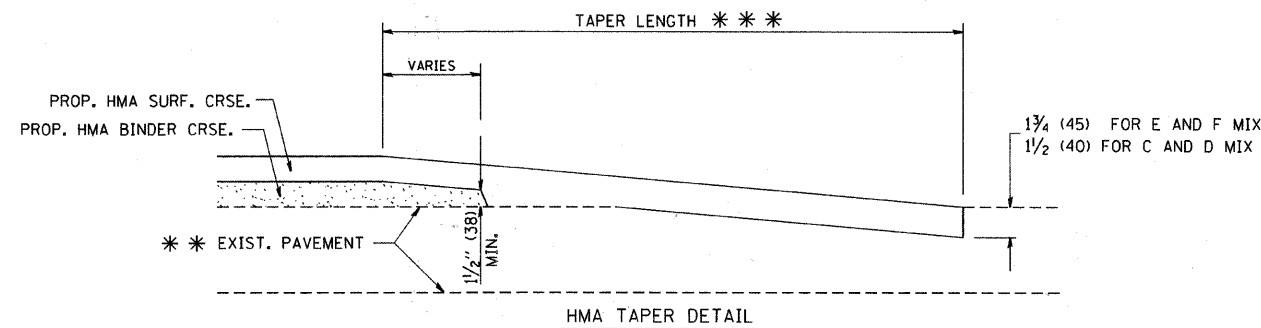

HMA TAPER DETAIL

TYPICAL BUTT JOINT AND HMA TAPER
FOR RESURFACING ONLY

*** PC CONCRETE, HMA OR HMA RESURFACED PAVEMENT.

NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
 - B: MINOR SIDE ROADS.
 - C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING HMA SURFACE.
 - D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED HMA COURSES.
 - E: TAPER THE TEMP. RAMP AT A RATE OF 3'-0" (900 mm) PER 1 INCH (25 mm) OF MILLING THICKNESS.
 - F: INSTALLATION AND REMOVAL OF THE 4'-6" (1.35 m) TEMP. RAMP IS INCLUDED IN COST OF HMA SURFACE REMOVAL - BUTT JOINT
 - G: SEE ARTICLE 406.08 AND 406.14 OF THE STANDARD SPECIFICATIONS FOR "HMA AND/OR PCC SURFACE REMOVAL, BUTT JOINT".
- * SEE TYPICAL SECTIONS FOR MILLING THICKNESS.
- *** 20'-0" (6.1 m) PER 1 (25) RESURFACING (NOTE "A")
10'-0" (3.0 m) PER 1 (25) RESURFACING (NOTE "B")

BASIS OF PAYMENT:


THE BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD (SQUARE METER) FOR "HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT" OR FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL - BUTT JOINT".

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

FILE NAME = W:\dststd\22x34\bd32.dgn	USER NAME = geglennob	DESIGNED - M. DE YONG	REVISED - R. SHAH 10-25-94
		DRAWN -	REVISED - A. ABBAS 03-21-97
	PLOT SCALE = 50.0000' / IN.	CHECKED -	REVISED - M. GOMEZ 04-06-01
	PLOT DATE = 1/4/2008	DATE - 06-13-90	REVISED - R. BORO 01-01-07

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BUTT JOINT AND HMA TAPER DETAILS		F.A.U. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 23
SCALE: NONE	SHEET NO. 1 OF 1 SHEETS	STA.	TO STA.		BD400-05 BD32 CONTRACT NO. 63659	
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT						

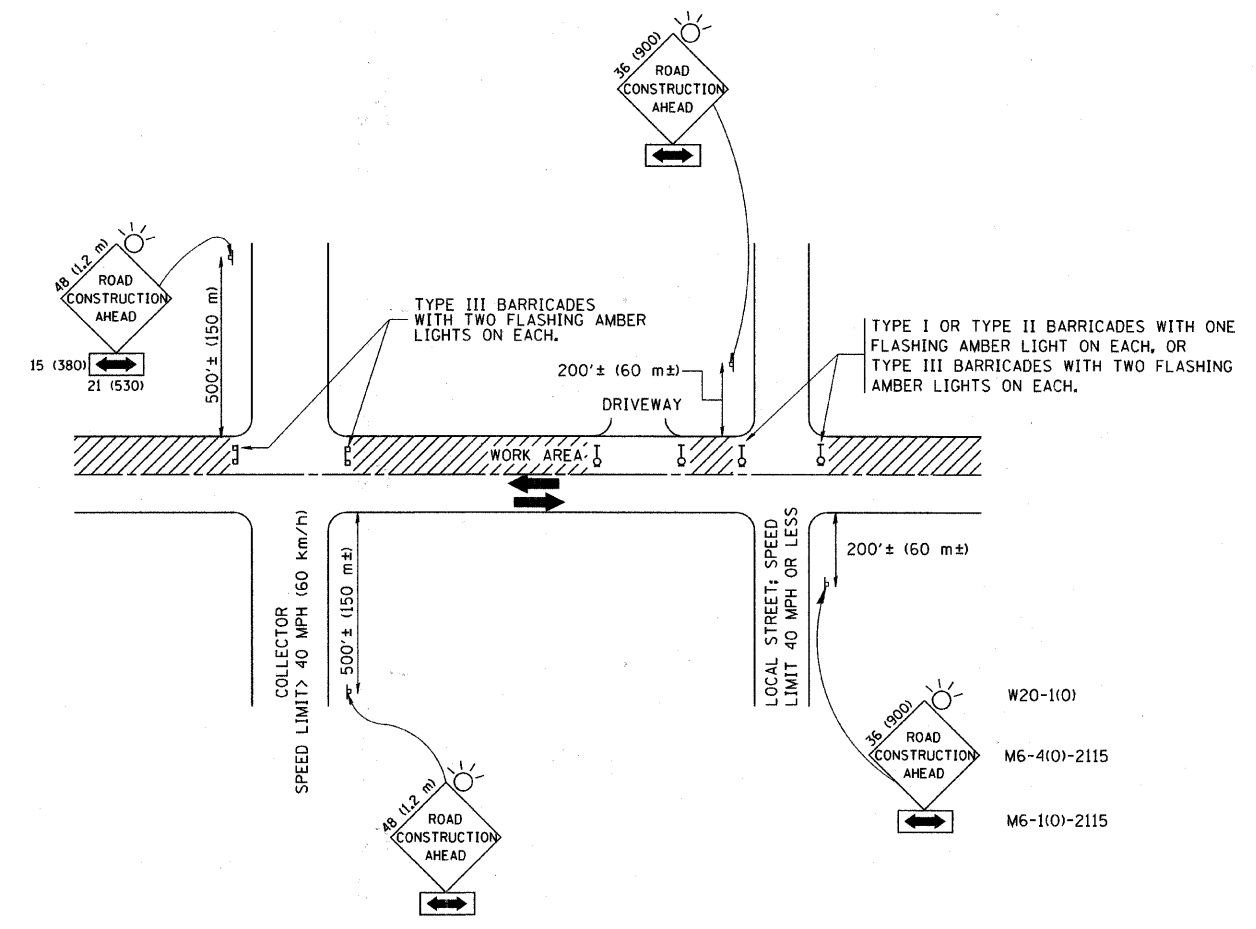

TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS

NOTES:

- A. FOR NO LANE RESTRICTION ON THE SIDE ROAD OR DRIVEWAYS
- SIDE ROAD WITH A SPEED LIMIT OF 40 MPH (60 km/h) OR LESS AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER:
 - ONE ROAD CONSTRUCTION AHEAD SIGN 36 x 36 (900x900) WITH A FLASHER AND FLAG MOUNTED ON IT APPROXIMATELY 200' (60 m) IN ADVANCE OF THE MAIN ROUTE.
 - THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE I, TYPE II OR TYPE III BARRICADES, 1/3 OF THE CROSS SECTION OF THE CLOSED PORTION.
 - SIDE ROAD WITH A SPEED LIMIT GREATER THAN 40 MPH (60 km/h) AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER:
 - ONE ROAD CONSTRUCTION AHEAD SIGN 48 x 48 (1.2 m x 1.2 m) WITH A FLASHER MOUNTED ON IT APPROXIMATELY 500' (150 m) IN ADVANCE OF THE MAIN ROUTE.
 - THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE CLOSED PORTION.
3. WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (M6-1) SHALL BE USED IN LIEU OF THE DOUBLE HEADED ARROW (M6-4).
- B. FOR A LANE CLOSURE ON A SIDE ROAD OR DRIVEWAY:
- USE APPLICABLE PORTIONS OF THE TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES (STD. 70150L STD. 701606 OR THE APPROPRIATE STANDARD). THE SPACING OF SIGNS AND BARRICADES SHALL BE ADJUSTED FOR FIELD CONDITIONS AS DIRECTED BY THE ENGINEER. THE DIRECTIONAL ARROW SHALL BE COVERED OR REMOVED WHEN NO LONGER CONSISTENT WITH THE SIDE ROAD LANE CLOSURE.
- C. ADVANCE WARNING SIGNS ARE TO BE OMITTED ON DRIVEWAY UNLESS OTHERWISE NOTED.
- D. THE TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS SHALL BE INCIDENTAL TO THE COST OF SPECIFIED TRAFFIC CONTROL STANDARDS OR ITEMS.




All dimensions are in millimeters (inches) unless otherwise shown.

FILE NAME =	USER NAME = goglieno	DESIGNED - LHA	REVISED - J. OBERLE 10-18-95
W:\diststd\22x34\to10.dgn		DRAWN -	REVISED - A. HOUSEH 03-06-96
	PLOT SCALE = 50.000' / IN.	CHECKED -	REVISED - A. HOUSEH 10-15-96
	PLOT DATE = 1/4/2008	DATE - 06-89	REVISED - T. RAMMACHER 01-06-00

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS	
SCALE: NONE	SHEET NO. 1 OF 1 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0082	11-00149-00-RS	WILL	30	24
TC-10		CONTRACT NO. 63659		
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

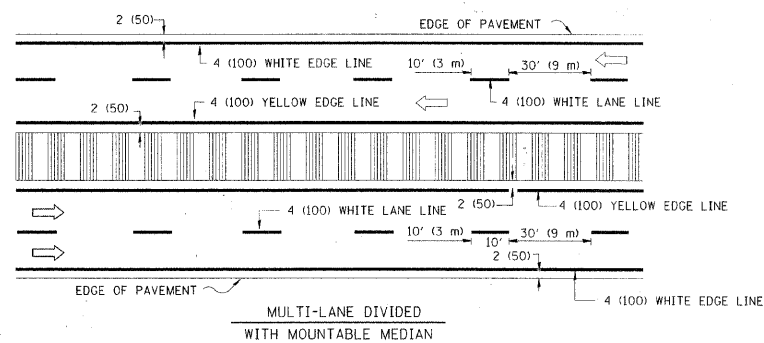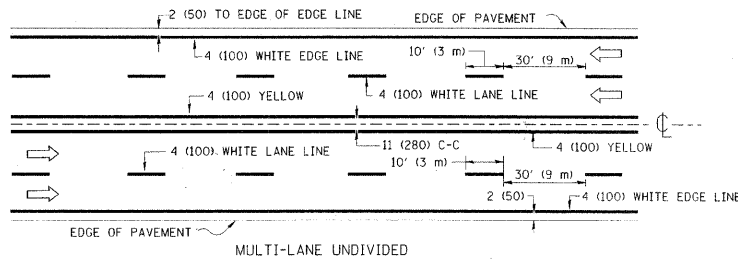
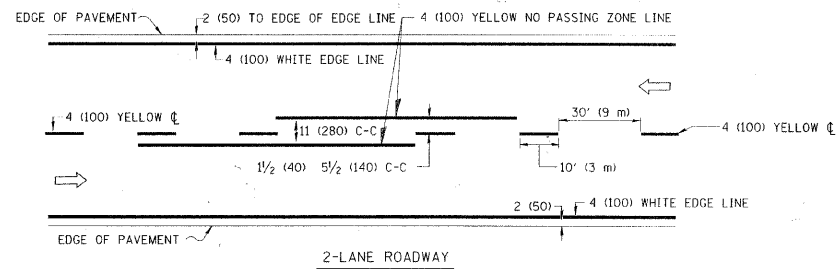


NOTE: MEDIANS WITH BARRIER CURB DO NOT REQUIRE AN EDGE LINE


TYPICAL LANE AND EDGE LINE MARKING

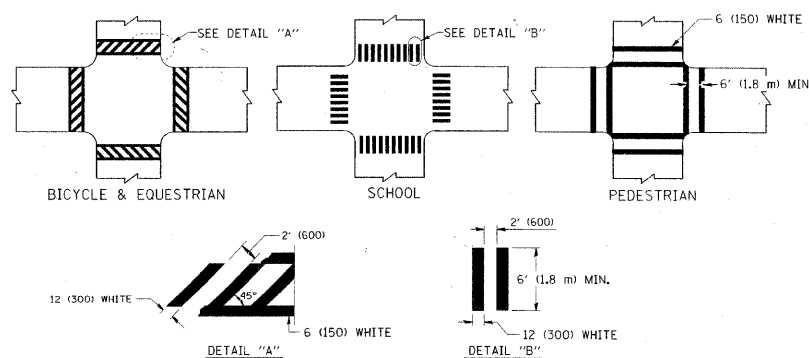


TYPICAL CROSSWALK MARKING

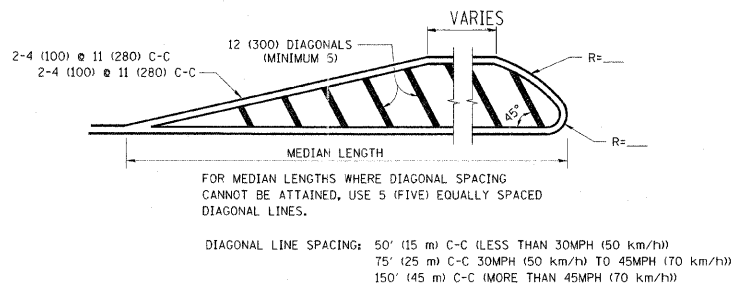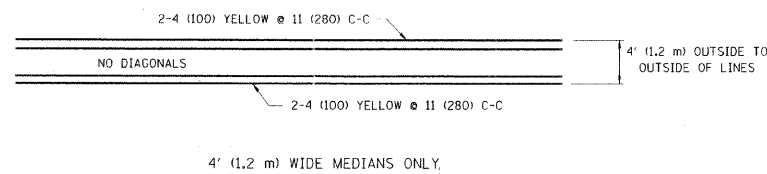


MEDIANS OVER 4' (1.2 m) WIDE

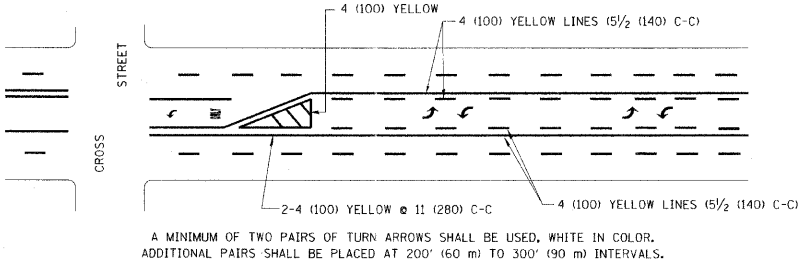


TYPICAL PAINTED MEDIAN MARKING




TYPICAL PAINTED MEDIAN MARKING

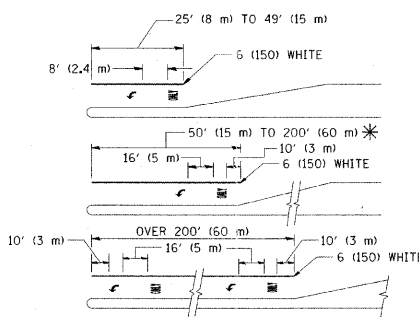

TYPICAL TURN LANE MARKING

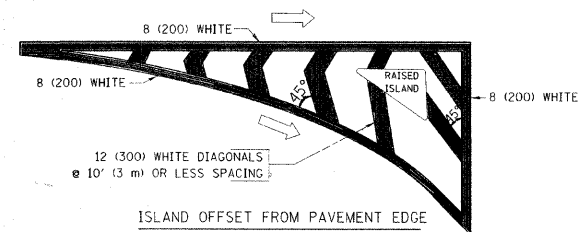

ISLAND OFFSET FROM PAVEMENT EDGE

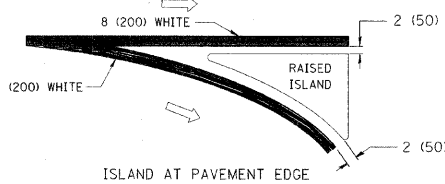

ISLAND AT PAVEMENT EDGE

TYPICAL ISLAND MARKING

TYPE OF MARKING	WIDTH OF LINE	PATTERN	COLOR	SPACING / REMARKS
CENTERLINE ON 2 LANE PAVEMENT	4 (100)	SKIP-DASH	YELLOW	10' (3 m) LINE WITH 30' (9 m) SPACE
CENTERLINE ON MULTI-LANE UNDIVIDED PAVEMENT	2 @ 4 (100)	SOLID	YELLOW	11 (280) C-C
NO PASSING ZONE LINES: FOR ONE DIRECTION FOR BOTH DIRECTIONS	4 (100) 2 @ 4 (100)	SOLID SOLID	YELLOW YELLOW	5 1/2 (140) C-C FROM SKIP-DASH CENTERLINE 11 (280) C-C OMIT SKIP-DASH CENTERLINE BETWEEN
LANE LINES	4 (100) 5 (125) ON FREEWAYS	SKIP-DASH SKIP-DASH	WHITE WHITE	10' (3 m) LINE WITH 30' (9 m) SPACE
DOTTED LINES (EXTENSIONS OF CENTER, LANE OR TURN LANE MARKINGS)	SAME AS LINE BEING EXTENDED	SKIP-DASH	SAME AS LINE BEING EXTENDED	2' (600) LINE WITH 6' (1.8 m) SPACE
EDGE LINES	4 (100)	SOLID	YELLOW-LEFT WHITE-RIGHT	OUTLINE MOUNTABLE MEDIANS IN YELLOW; EDGE LINES ARE NOT USED NEXT TO BARRIER CURB
TURN LANE MARKINGS	6 (150) LINE; FULL SIZE LETTERS & SYMBOLS (8' (2.4m))	SOLID	WHITE	SEE TYPICAL TURN LANE MARKING DETAIL
TWO WAY LEFT TURN MARKING	2 @ 4 (100) EACH DIRECTION 8' (2.4m) LEFT ARROW	SKIP-DASH AND SOLID IN PAIRS	YELLOW WHITE	10' (3 m) LINE WITH 30' (9 m) SPACE FOR SKIP-DASH 5 1/2 (140) C-C BETWEEN SOLID LINE AND SKIP-DASH LINE SEE TYPICAL TWO-WAY LEFT TURN MARKING DETAIL
CROSSWALK LINES (PEDESTRIAN) A. DIAGONALS (BIKE & EQUESTRIAN) B. LONGITUDINAL BARS (SCHOOL)	2 @ 6 (150) 12 (300) @ 45° 12 (300) @ 90°	SOLID SOLID SOLID	WHITE WHITE WHITE	NOT LESS THAN 6' (1.8 m) APART 2' (600) APART SEE TYPICAL CROSSWALK MARKING DETAILS.
STOP LINES	24 (600)	SOLID	WHITE	PLACE 4' (1.2 m) IN ADVANCE OF AND PARALLEL TO CROSSWALK, IF PRESENT. OTHERWISE, PLACE AT DESIRED STOPPING POINT, PARALLEL TO CROSSROAD CENTERLINE, WHERE POSSIBLE
PAINTED MEDIANS	2 @ 4 (100) WITH 12 (300) DIAGONALS @ 45° NO DIAGONALS USED FOR 4' (1.2 m) WIDE MEDIANS	SOLID	YELLOW: TWO WAY TRAFFIC WHITE: ONE WAY TRAFFIC	11 (280) C-C FOR THE DOUBLE LINE SEE TYPICAL PAINTED MEDIAN MARKING.
GORE MARKING AND CHANNELIZING LINES	8 (200) WITH 12 (300) DIAGONALS @ 45°	SOLID	WHITE	DIAGONALS: 15' (4.5 m) C-C (LESS THAN 30MPH (50 km/h)) 20' (6 m) C-C (30MPH (50 km/h) TO 45MPH (70 km/h)) 30' (9 m) C-C (OVER 45MPH (70 km/h))
RAILROAD CROSSING	24 (600) TRANSVERSE LINES; "RR" IS 6' (1.8 m) LETTERS; 16 (400) LINE FOR "X"	SOLID	WHITE	SEE STATE STANDARD 780001 AREA OF: "R"=3.6 SQ. FT. (0.33 m ²) EACH "X"=54.0 SQ. FT. (5.0 m ²)
SHOULDER DIAGONALS	12 (300) @ 45°	SOLID	WHITE - RIGHT YELLOW - LEFT	50' (15 m) C-C (LESS THAN 30MPH (50 km/h)) 75' (25 m) C-C (30 MPH (50 km/h) TO 45MPH (70 km/h)) 150' (45 m) C-C (OVER 45MPH (70 km/h))

FOR FURTHER DETAILS ON PAVEMENT MARKING REFER TO STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND STATE STANDARD 780001.

All dimensions are in inches (millimeters) unless otherwise shown.



FILE NAME =	USER NAME = drvakosgn	DESIGNED - EVERS	REVISED - T. RAMMACHER 10-27-94
cs:\pwork\psdot\drvakosgn\d8108315\to3.dgn		DRAWN -	REVISED - C. JUCCIUS 09-09-09
	PLOT SCALE = 50.000 / IN.	CHECKED -	REVISED -
	PLOT DATE = 9/9/2009	DATE - 03-19-90	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DISTRICT ONE
TYPICAL PAVEMENT MARKINGS

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0082	11-00149-00-RS	WILL	30	25
TC-13			CONTRACT NO. 63659	
FED. ROAD DIST. NO. 1 (ILLINOIS) FED. AID PROJECT				

SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.

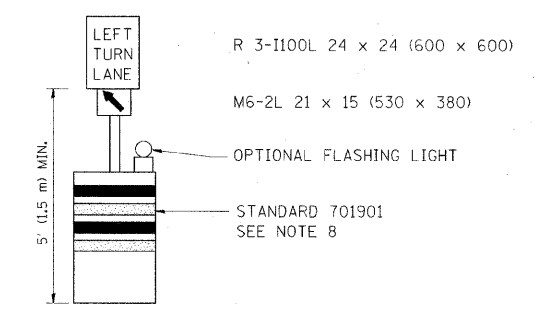
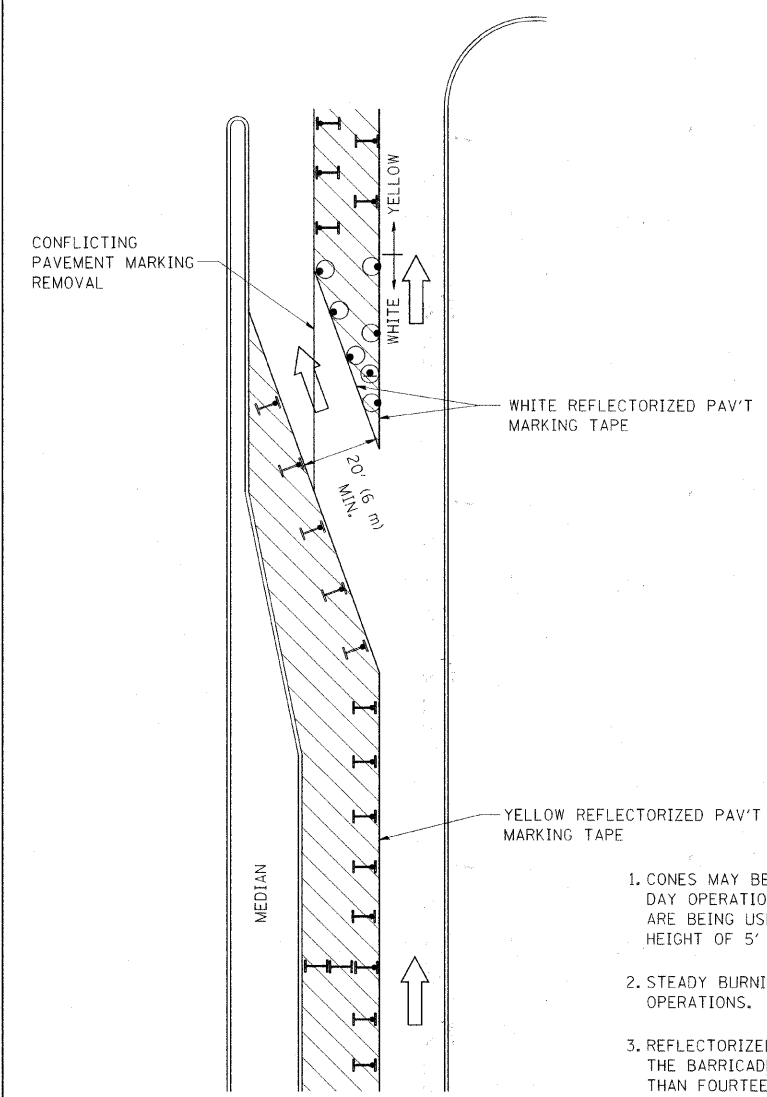






GENERAL NOTES

1. CONES MAY BE SUBSTITUTED FOR BARRICADES OR DRUMS AT HALF THE SPACING DURING DAY OPERATIONS. CONES SHALL BE A MINIMUM OF 28 (710) IN HEIGHT. WHEN CONES ARE BEING USED, THE "LEFT TURN LANE" SIGN MAY BE SKID MOUNTED AT A MINIMUM HEIGHT OF 5' (1.5 m).
2. STEADY BURNING LIGHTS WILL NOT BE REQUIRED ON BARRICADES OR DRUMS FOR DAY OPERATIONS. ALL LIGHTS SHALL BE MONODIRECTIONAL.
3. REFLECTORIZED TEMPORARY PAVEMENT MARKING TAPE SHALL BE PLACED THROUGHOUT THE BARRICADED AREA OF EACH TURN BAY WHERE THE CLOSURE TIME IS GREATER THAN FOURTEEN DAYS.
4. THIS APPLICATION ALSO APPLIES WHEN WORK IS BEING PERFORMED IN THE RIGHT LANE(S) AND THE RIGHT TURN BAY IS TO REMAIN OPEN. UNDER THIS CONDITION, "RIGHT TURN LANE" R3-100 24 x 24 (600 x 600) AND M6-2R 21 x 15 (530 x 380) SHALL BE USED.
5. THESE CONTROLS SHALL SUPPLEMENT MAINLINE TRAFFIC CONTROL FOR LANE CLOSURES.
6. LONGITUDINAL DIMENSIONS MAY BE ADJUSTED TO FIT FIELD CONDITIONS.
7. FORM OPER 725 IS REQUIRED.
8. IF A DRUM OR TYPE II BARRICADE WITH AN ATTACHED SIGN PANEL WHICH MEETS NCHRP 350 REQUIREMENTS IS NOT AVAILABLE, THE SIGNS SHALL BE MOUNTED, ABOVE THE BARRICADES, ON SEPARATE SIGNS SUPPORTS THAT MEET NCHR 350 PREQUIREMENTS.
9. TRAFFIC CONTROL AND PROTECTION AT TURN BAYS (TO REMAIN OPEN TO TRAFFIC) SHALL BE INCLUDED IN THE COST SPECIFIED TRAFFIC CONTROL STANDARDS OR ITEMS.

All dimensions are in inches (millimeters) unless otherwise shown.

LEGEND

-  WORK AREA
-  LANE OPEN TO TRAFFIC
-  TYPE I OR II BARRICADE WITH STEADY BURN LIGHT
-  DRUM WITH STEADY BURN LIGHT
-  DRUM WITH SIGN (WITH OPTIONAL FLASHING LIGHT) SEE DETAIL
-  TYPE I OR II CHECK BARRICADE WITH FLASHING LIGHT


FILE NAME =	USER NAME = drsvakosgn	REVISED - T. RAMMACHER 09-08-94	REVISED - R. BORO 09-14-09
es:\pwr\work\pwidot\DRIVAKOSGN\d186315\14.dgn		REVISED - A. HOUSEH 11-07-95	REVISED -
PLOT SCALE = 49.9999 / IN.		REVISED - A. HOUSEH 10-12-96	REVISED -
PLOT DATE = 9/14/2009		REVISED - T. RAMMACHER 01-06-00	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**


**TRAFFIC CONTROL AND PROTECTION AT TURN BAYS
(TO REMAIN OPEN TO TRAFFIC)**

SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.


F.A.U. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 26
TC-14		CONTRACT NO. 63659		
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

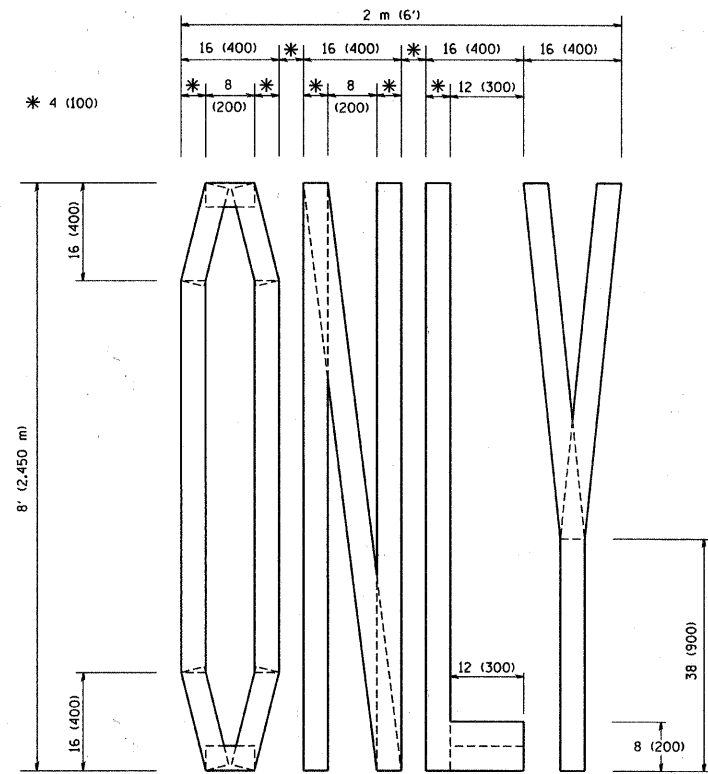

QUANTITY
 4 (100) LINE = 64.1 ft. (19.7 m)
 21.1 sq. ft. (1.97 sq. m)

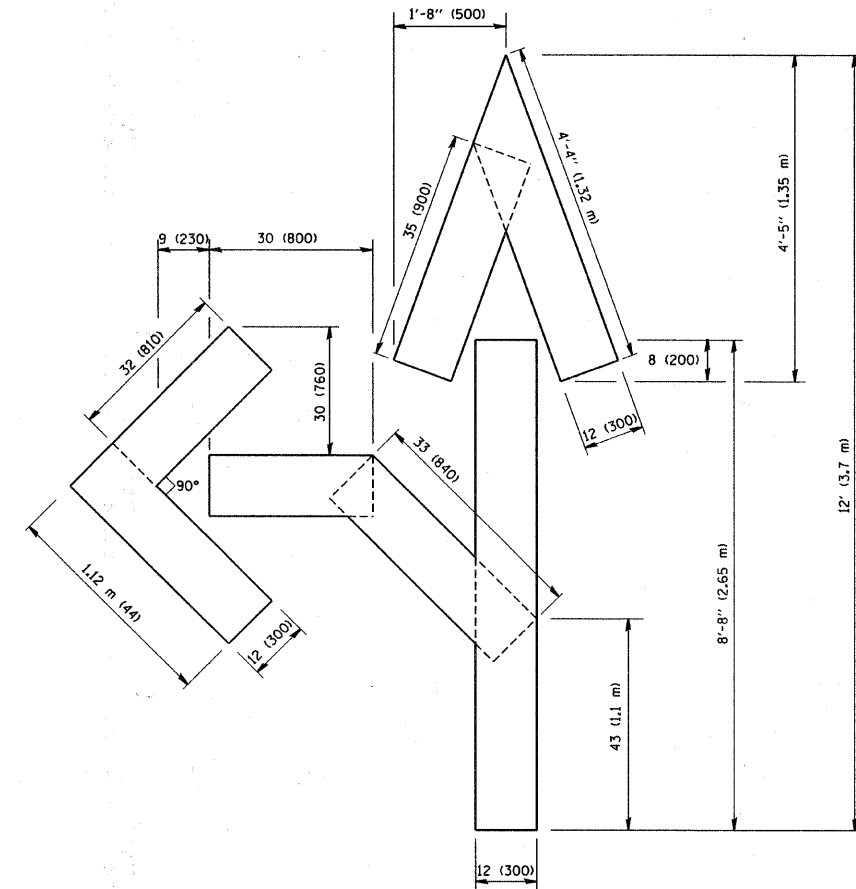

QUANTITY
 4 (100) LINE = 82.5 ft. (25.3 m)
 27.5 sq. ft. (2.53 sq. m)

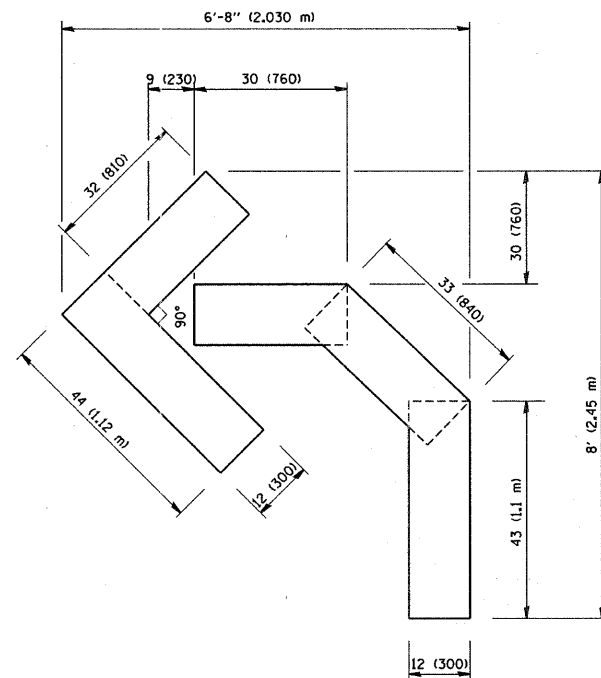

QUANTITY
 4 (100) LINE = 45.5 ft. (13.9 m)
 15.2 sq. ft. (1.39 sq. m)

All dimensions are in inches (millimeters) unless otherwise shown.


FILE NAME = W:\dotstd\22x34\to16.dgn	USER NAME = gaglianob	DESIGNED -	REVISED -T. RAMMACHER 06-05-96
		DRAWN -	REVISED -T. RAMMACHER 11-04-97
	PLOT SCALE = 50.0000 / IN.	CHECKED -	REVISED -T. RAMMACHER 03-02-98
	PLOT DATE = 1/4/2008	DATE - 09-18-94	REVISED -E. GOMEZ 08-28-00

STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION

PAVEMENT MARKING LETTERS AND SYMBOLS
 FOR TRAFFIC STAGING

SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0082	11-00149-00-RS	WILL	30	27
TC-16			CONTRACT NO. 63659	
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				

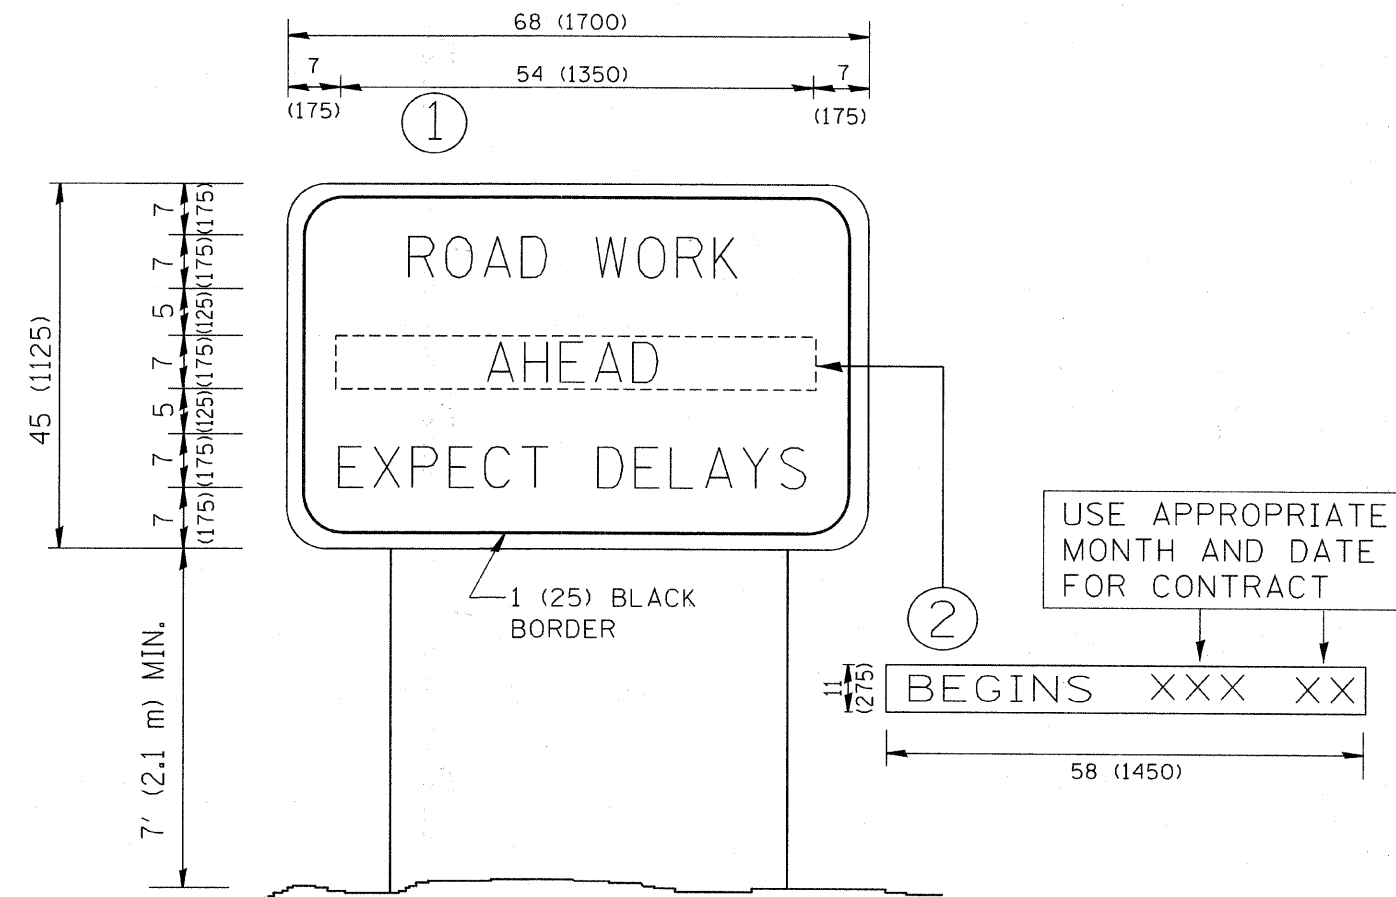

NOTES:

1. USE BLACK LETTERING ON ORANGE BACKGROUND.
2. ERECT SIGNS IN ADVANCE OF THE LOCATION FOR THE "ROAD CONSTRUCTION AHEAD" SIGN AT LOCATIONS AS DIRECTED BY THE ENGINEER.
3. ERECT SIGN ① WITH INSTALLED PANEL ② ONE WEEK PRIOR TO THE START OF CONSTRUCTION.
4. REMOVE PANEL ② SOON AFTER THE START OF CONSTRUCTION.
5. SEE SPECIAL PROVISION FOR "TEMPORARY INFORMATION SIGNING" FOR ADDITIONAL INFORMATION.
6. ONE SIGN ASSEMBLY EQUALS 25.70 SQ. FT. (2.3 SQ. M.)
7. SHALL BE PAID FOR AS TEMPORARY INFORMATION SIGNING.

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

FILE NAME = w:\diststd\22x34\tc22.dgn	USER NAME = goglienobt	DESIGNED -	REVISED - R. MIRS 09-15-97
		DRAWN -	REVISED - R. MIRS 12-11-97
	PLOT SCALE = 50,000 / IN.	CHECKED -	REVISED - T. RAMMACHER 02-02-99
	PLOT DATE = 1/4/2008	DATE -	REVISED - C. JUCIUS 01-31-07


**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**ARTERIAL ROAD
INFORMATION SIGN**

SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.

F.A.L. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0082	11-00149-00-RS	WILL	30	28
TC-22			CONTRACT NO. 63659	
FED. ROAD DIST. NO. 1 [ILLINOIS] FED. AID PROJECT				

FILE NAME = D:\Naper\11b_25367951_Book\p1\Drawings\General\Water\val\Detail.dgn

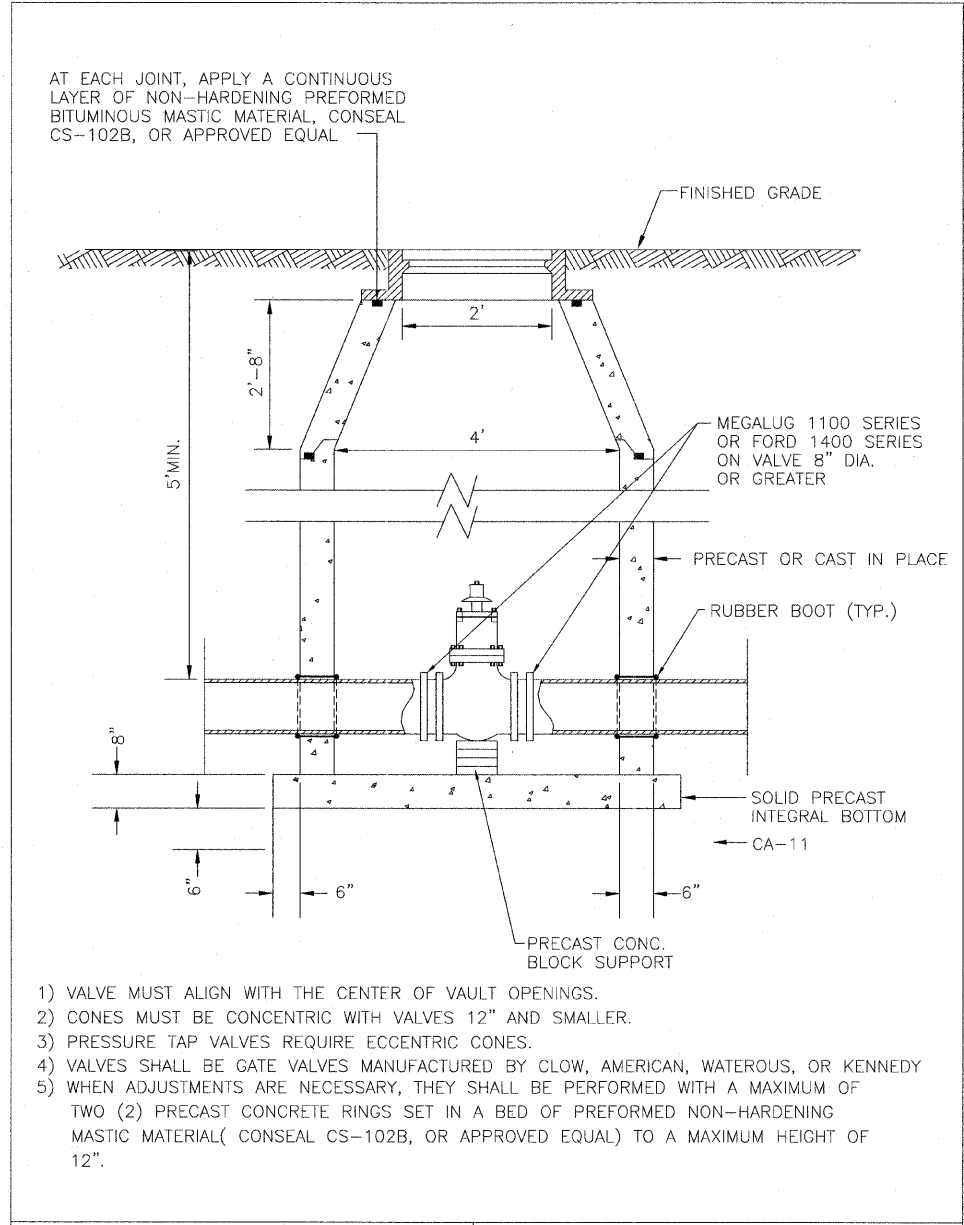

- 1) VALVE MUST ALIGN WITH THE CENTER OF VAULT OPENINGS.
- 2) CONES MUST BE CONCENTRIC WITH VALVES 12" AND SMALLER.
- 3) PRESSURE TAP VALVES REQUIRE ECCENTRIC CONES.
- 4) VALVES SHALL BE GATE VALVES MANUFACTURED BY CLOW, AMERICAN, WATEROUS, OR KENNEDY
- 5) WHEN ADJUSTMENTS ARE NECESSARY, THEY SHALL BE PERFORMED WITH A MAXIMUM OF TWO (2) PRECAST CONCRETE RINGS SET IN A BED OF PREFORMED NON-HARDENING MASTIC MATERIAL(CONSEAL CS-102B, OR APPROVED EQUAL) TO A MAXIMUM HEIGHT OF 12".

Title:		VALVE VAULT		CITY OF NAPERVILLE STANDARD DETAIL	
Approved By:	DATE: 12/2005	REV:	Detail: WATER 4		
	SCALE: NTS				

NOTE 5 IS ALSO APPLICABLE TO ALL DRAINAGE AND UTILITIES STRUCTURES TO BE ADJUSTED.



USER NAME = *USER*	DESIGNED - EVI	REVISED -
	DRAWN - KJB	REVISED
PLOT SCALE = 1.0000 "/ IN.	CHECKED - DAK	REVISED -
PLOT DATE = 10/11/2011 3:30:48 PM	DATE - 10/24/2011	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

VALVE VAULT DETAIL

SCALE: 1" = ft SHEET NO. OF SHEETS STA. — TO STA. —

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0082	11-00149-00-RS	WILL	30	30
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT			CONTRACT NO. 63659	

Summary of Pavement Core Measurements

Core #: 81
Location: 10 S 049 Book Rd.

Material	Depth (in.)		Thickness (in.)	Remarks/Condition
Bituminous Surface	0	to 1- 1/4	1- 1/4	Fair
Bituminous Level Binder	1- 1/4	to 1- 3/4	1/2	Fair
Bituminous Binder	1- 3/4	to 4	2- 1/4	Fair - Separated at lift
Bituminous Binder/Base Course	4	to 9- 1/4	5- 1/4	Fair

Core #: 82
Location: 10 S 363 Book Rd.

Material	Depth (in.)		Thickness (in.)	Remarks/Condition
Bituminous Surface	0	to 2	2	Fair - Core deteriorated & separated at lift
Bituminous Binder	2	to 6	4	Fair - Core deteriorated & separated at lift
Bituminous Base Course	6	to 9	3	Fair to Poor

Core #: 83
Location: 2043 Tamahawk Ln. (West of Book Rd.)

Material	Depth (in.)		Thickness (in.)	Remarks/Condition
Bituminous Surface	0	to 2- 1/4	2- 1/4	Fair
Bituminous Binder	2- 1/4	to 4	1- 3/4	Fair

Core #: 84
Location: 1847 Tamahawk Ln. (East of Book Rd.)

Material	Depth (in.)		Thickness (in.)	Remarks/Condition
Bituminous Surface	0	to 1- 7/8	1- 7/8	Fair to Poor - Core deteriorated & separated at lift
Bituminous Binder	1- 7/8	to 4- 1/8	2- 1/4	Fair to Poor - Core deteriorated at top of lift

Core #: 85
Location: 2840 Alandale Cr.

Material	Depth (in.)		Thickness (in.)	Remarks/Condition
Bituminous Surface	0	to 1- 5/8	1- 5/8	Fair
Bituminous Binder/Base Course	1- 5/8	to 4	2- 3/8	Fair to Poor - Core deteriorated at bottom of lift

F:\E:\NAME = G:\Noberserv\11e_20387854_BookRoad\SP_Roadway\Drawings\General\PavementCore\Drawings.dgn



USER NAME = \$USER\$	DESIGNED - EVI	REVISED -
	DRAWN - KJB	REVISED -
PLOT SCALE = 1/8000' / IN.	CHECKED - DAK	REVISED -
PLOT DATE = 10/31/2011 3:31:15 PM	DATE - 10/24/2011	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**BOOK ROAD
PAVEMENT CORE MEASUREMENTS**

SCALE: 1" = 10' SHEET NO. 1 OF 1 SHEETS STA. — TO STA. —

F.A.U. RTE. 0082	SECTION 11-00149-00-RS	COUNTY WILL	TOTAL SHEETS 30	SHEET NO. 30A
CONTRACT NO. 63659			FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT	