



QUANTITY
 12" LINE = 16 LIN. FT.
 OR 4" LINE = 48 LIN. FT.

QUANTITY
 12" LINE = 29 LIN. FT.
 OR 4" LINE = 87 LIN. FT.

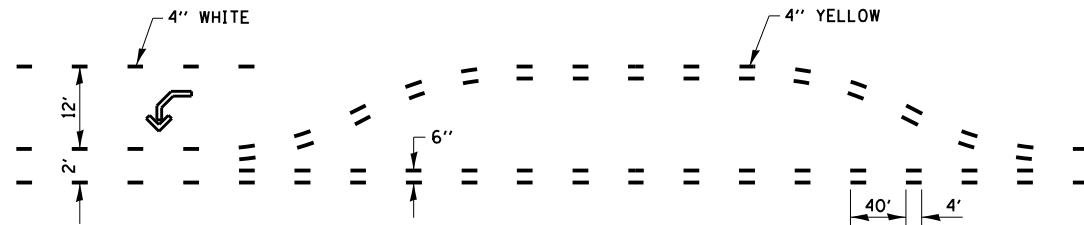

**SHORT-TERM PAVEMENT MARKING
 FOR MEDIANS AND ARROWS**

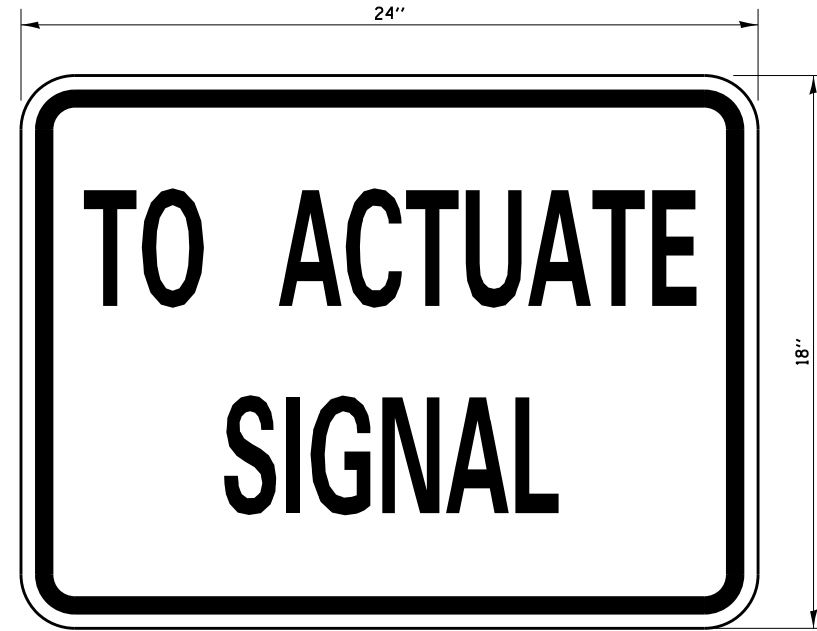

SIZE: 24" x 18"
 4" CAPITAL LETTERS - BLACK
 1/2" BORDER - BLACK
 WHITE REFLECTIVE - TYPE B
 ENGINEERING GRADE SHEETING

GENERAL NOTE:
 THIS SIGN SHALL BE INSTALLED AT THE
 STOP LINE AS DIRECTED BY THE ENGINEER.

STOP LINE SIGN FOR TEMPORARY SIGNALS

FILE NAME =
 D366905-SHT-DETAILS.DGN

USER NAME = --
 PLOT SCALE = NONE
 PLOT DATE = 07/13

DESIGNED - JKC
 DRAWN - NV
 CHECKED - JKC
 DATE - 07/13

REVISED -
 REVISED -
 REVISED -
 REVISED -

STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION

SCALE: NONE SHEET OF SHEETS STA. - TO STA. -

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
41	(I)W&RS-1	KANKAKEE	450	182
CONTRACT NO. 66905				
ILLINOIS FED. AID PROJECT				