


109+00 (RAMP D)

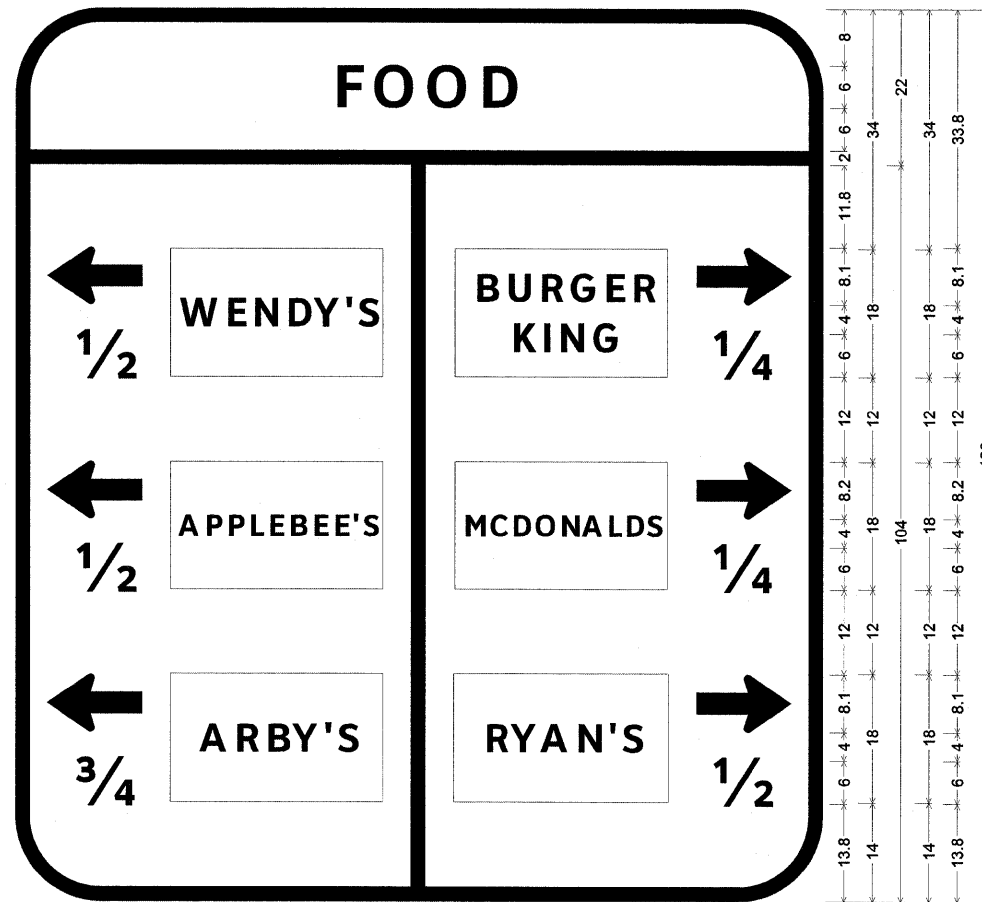


44.3		25.4		44.3	
114					
4.4	13.4	4	30	4	4.2
7.9	9.9	44	30.4	5.7	9.9
4.4	13.4	78.4	13.4	4.4	
7.9	9.9	80.1	9.9	6.2	
4.4	13.4	78.4	13.4	4.4	
7.9	9.9	80.1	9.9	6.2	
114					

12.0" Radius, 2.0" Border, White on Blue;  
 [FOOD] ClearviewHwy-5-W; Standard Arrow Custom 13.4" X 8.1" 180°; [1/2] ClearviewHwy-5-W;  
 Standard Arrow Custom 13.4" X 8.1" 180°; [1/2] ClearviewHwy-5-W;  
 Standard Arrow Custom 13.4" X 8.1" 180°; [3/4] ClearviewHwy-5-W;  
 Standard Arrow Custom 13.4" X 8.1" 0°; [1/4] ClearviewHwy-5-W;  
 Standard Arrow Custom 13.4" X 8.1" 0°; [1/4] ClearviewHwy-5-W;  
 Standard Arrow Custom 13.4" X 8.1" 0°; [1/2] ClearviewHwy-5-W;  
 Table of distances between letter and object lefts.

44.3	F	O	O	D	44.3
	5.4	7.5	7.7	4.8	
-0.0	114.0	0.0			
4.4	17.4	34.0	6.2	34.2	13.4
7.9	13.9	40.2	35.9	9.9	6.2
4.4	17.4	40.0	34.4	13.4	4.4
7.9	90.0	9.9	6.2		
4.4	91.8	13.4	4.4		
7.9	90.0	9.9	6.2		

114+25 (RAMP D)

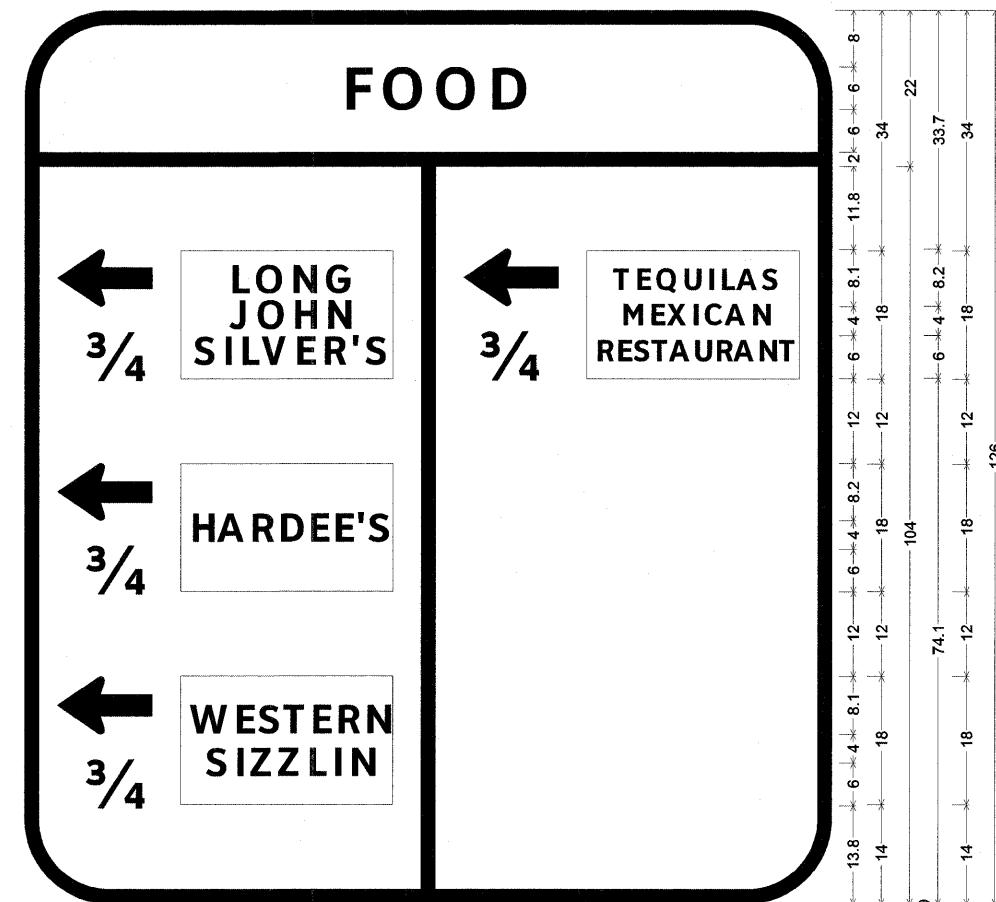

44.3		25.4		44.3	
114					
4.6	13.4	4	30	4	4.6
8.1	9.9	45.7	9.9	40.4	
4.6	13.4	96			
8.1	9.9	96			
4.6	13.4	96			
8.1	9.9	96			
114					

12.0" Radius, 2.0" Border, White on Blue;  
 [FOOD] ClearviewHwy-5-W; Standard Arrow Custom 13.4" X 8.1" 180°; [3/4] ClearviewHwy-5-W;  
 Standard Arrow Custom 13.4" X 8.1" 180°; [3/4] ClearviewHwy-5-W;  
 Standard Arrow Custom 13.4" X 8.1" 180°; [3/4] ClearviewHwy-5-W;  
 Standard Arrow Custom 13.4" X 8.1" 180°; [3/4] ClearviewHwy-5-W;  
 Table of distances between letter and object lefts.

44.3	F	O	O	D	44.3
	5.4	7.5	7.7	4.8	
-0.0	114.0	0.0			
4.6	17.4	34.0	6.0	17.4	30.0
8.1	13.9	41.7	15.7	30.0	4.6
4.6	17.4	57.4	30.0	4.6	
8.1	9.9	96.0			
4.6	13.4	96.0			
8.1	9.9	96.0			

EFK•Moen, LLC  
 Civil Engineering Design