



COMB CURB & GUTTER REMOVAL

Rt. Sta. 10+47 to 10+53

PIPE CULVERT REMOVAL

Rt. Sta. 811+82 to 812+08

COMB. CURB & GUTTER REMOVAL

Lt. Sta. 10+03 to 10+55

SPBGR REMOVAL
Lt. Sta. 812+00 to 813+60
Rt. Sta. 814+50 to 815+00


CONCRETE REMOVAL
2.2' x 2.2' x 1.2'

Fire Hydrant to be
removed and relocated
by City

CONCRETE REMOVAL
2.8' x 2.8' x 3'

Note:
MEDEIAN REMOVAL includes curb and gutter.

Remove earth and bituminous materials
to prepare for 3' stub for
BASE COURSE WIDENING, 13".
Cost incidental to EARTH EXCAVATION.

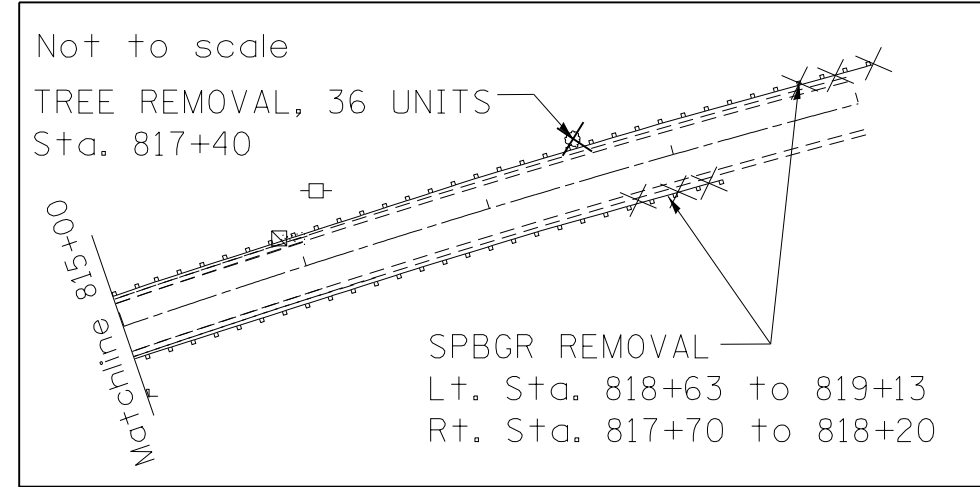

- PAVED SHOULDER REMOVAL
- MEDIAN REMOVAL
- PAVEMENT REMOVAL

FILE NAME = c:\temp\68b05\04_68B05-shr-cover.dgn	USER NAME = keathbr	DESIGNED -	REVISED -
		DRAWN -	REVISED -
		CHECKED -	REVISED -
		DATE -	REVISED -
Default	PLOT DATE = 10/17/2013		

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

REMOVAL PLAN

SCALE: SHEET OF SHEETS STA. 809+25 TO STA. 812+75

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
693	120N	TAZEWELL	51	20
CONTRACT NO. 68B05				
ILLINOIS FED. AID PROJECT				