




HEXAGON NUT
 AMER. NAT'L. STD. HEAVY HEX. FLAT NUT
 (ANSI B 18.2.2 - 1972)

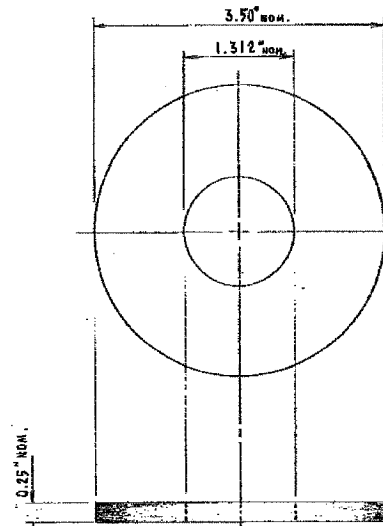

FLAT WASHER
 AMER. NAT'L. STD. TYPE "B" SERIES "W"
 (ANSI B 18.22.1-1965, R1975)

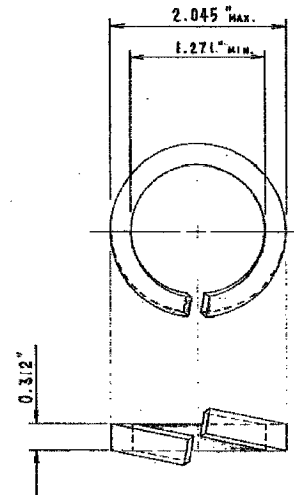

LOCK WASHER
 AMER. NAT'L. STD. HELICAL SPRING LOCK WASHER
 (ANSI B 18.21.1 - 1972)

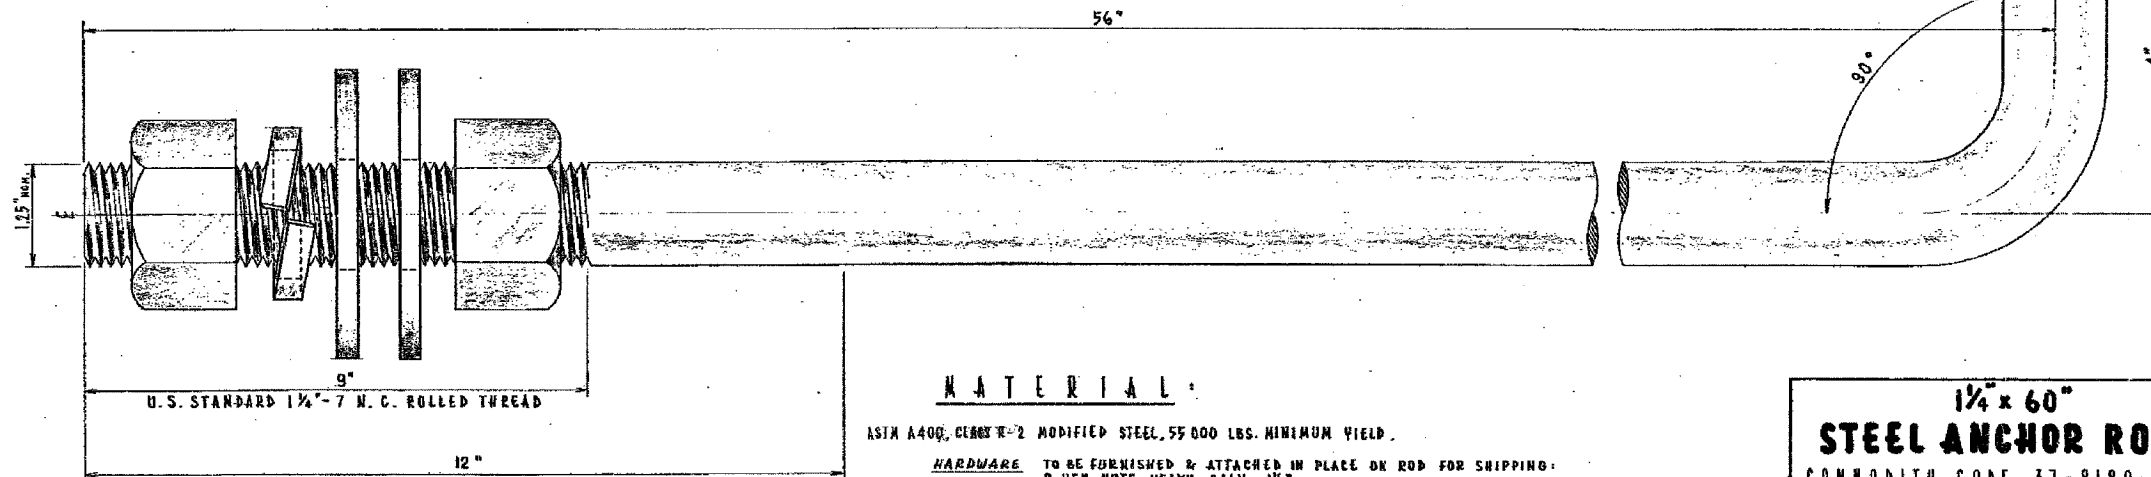

U.S. STANDARD 1/4"-7 N. C. ROLLED THREAD

A ZINC COATING, 0.0021 INCH IN THICKNESS SHALL BE APPLIED OVER THIS LENGTH AND COVERED WITH HEAVY NO-DX-1D, OR EQUAL, RUST INHIBITING COMPOUND

MATERIAL:

A518 A400, CLASS "2" MODIFIED STEEL, 55 000 LBS. MINIMUM YIELD.

HARDWARE

TO BE FURNISHED & ATTACHED IN PLACE ON ROD FOR SHIPPING:
 2 HEX. NUTS, HEAVY, GALV., 1/4"
 2 WASHERS, STEEL, ROUND, GALV., TYPE "B", SERIES "W", 1/4"
 1 WASHER, LOCK, STEEL, GALV., HELICAL SPRING, REGULAR, 1/4"

BOLT & NUTS SHALL HAVE AN AMERICAN STANDARD CLASS 2 OR 3 FIT.
 (NUT IS TAPPED OVERSIZE BY 1/32")

1/4" x 60"
STEEL ANCHOR ROD
 COMMODITY CODE 37-8180-0236

| | | | |
|---------|---|------------------------|----------------------|
| REVISED | CITY OF CHICAGO DEPT. OF STREETS AND SANITATION BUREAU OF ELECTRICITY DIVISION OF ELECTRICAL ENGINEERING | | |
| A | DRAWN EDGEMIC GERULIS | CHECKED J. WIKALSKI | ENGINEER M. SHINE |
| B | DRG. NO. | | |
| C | 811 | | |
| D | DATE: AUG. 3, 1982 | | |
| E | SCALE: 17" x 28" | | |
| F | DRAWN BY: <i>Edgemic Gerulis</i> | | |
| G | CHECKED BY: <i>James M. Shine</i> | | |

| REVISIONS | NAME | DATE |
|-----------|------|------|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

10/27/2004 08:56:06 AM