



| F.A.P. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---|--------------|----------------|--------------|-----------|
| 353 | (12&13)WRS-4 | WILL | 608 | 167 |
| STA. 976+00 | | TO STA. 998+00 | | |
| FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT | | | | |

EROSION BLANKET PLAN

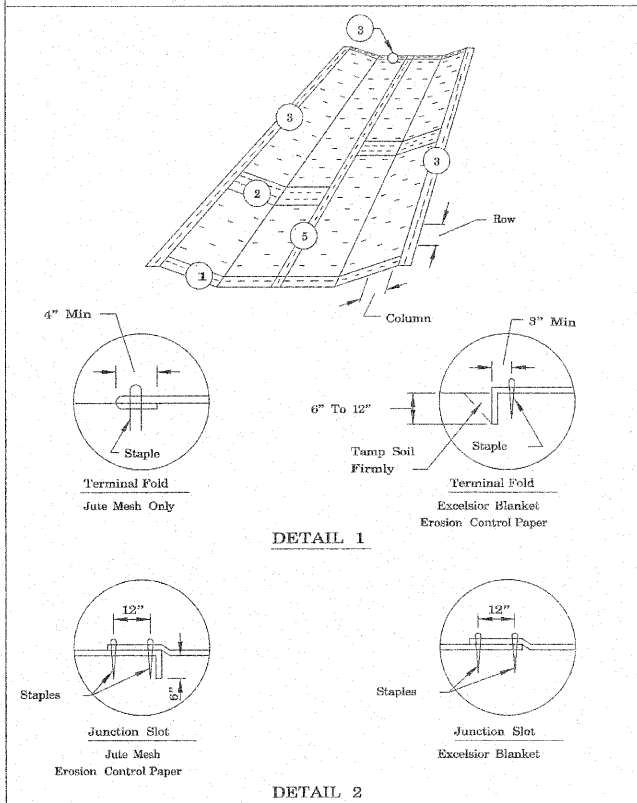

| | | |
|--|---|---|
| REFERENCE Project _____ Designed _____ Date _____ Checked _____ Date _____ Approved _____ Date _____ | NRCS National Resource Conservation Service | STANDARD DWG. NO. IL-530 SHEET 1 OF 2 DATE: 6-24-94 |
|--|---|---|

EROSION BLANKET PLAN

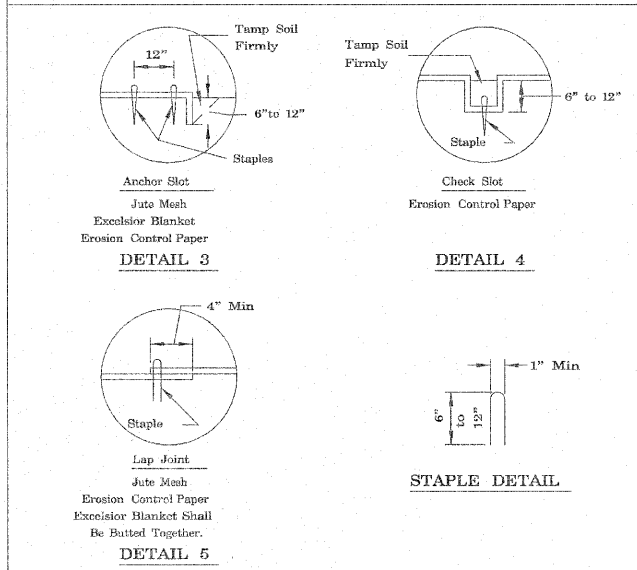


NOTES:

- On erosion control paper, check slots, in ditch channel shall be spaced so that one occurs within each 50' on slopes of more than 4% and less than 6%. On slopes of 6% or more, they shall be spaced so that one occurs within each 25'.
- Staples are to be placed alternately, in columns approximately 2' apart and in rows approximately 3' apart. Approximately 175 staples are required per 4' x 225' roll of material and 125 staples are required per 4' x 150' roll of material.
- Erosion control material shall be placed loosely over ground surface. Do not stretch.
- All terminal ends and transverse laps shall be stapled at approximately 12" intervals.

| | | |
|--|---|--|
| REFERENCE Project _____ Designed _____ Date _____ Checked _____ Date _____ Approved _____ Date _____ | NRCS National Resource Conservation Service | STANDARD DWG. NO. IL-530 SHEET 2 OF 2 DATE: 3-1-95 |
|--|---|--|

SILT FENCE PLAN

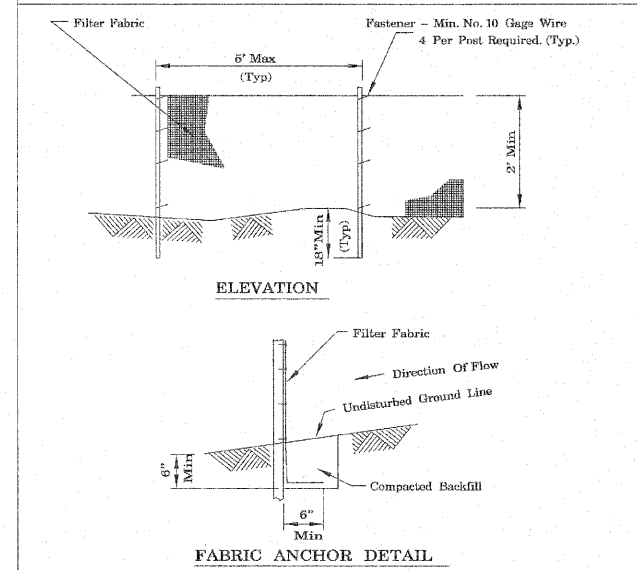


NOTES:

- Temporary sediment fence shall be installed prior to any grading work in the area to be protected. They shall be maintained throughout the construction period and removed in conjunction with the final grading and site stabilization.
- Filter fabric shall meet the requirements of material specification 592 Geotextile Table 1 or 2, Class with equivalent opening size of at least 30 for nonwoven and 50 for woven.
- Fence posts shall be either standard steel post or wood post with a minimum cross-sectional area of 3.0 sq. in.

| | | |
|--|---|--|
| REFERENCE Project _____ Designed _____ Date _____ Checked _____ Date _____ Approved _____ Date _____ | NRCS National Resource Conservation Service | STANDARD DWG. NO. IL-620 SHEET 1 OF 2 DATE: 11-20-01 |
|--|---|--|

PAID FOR AS "PERIMETER EROSION BARRIER"

SILT FENCE WITH WIRE SUPPORT PLAN

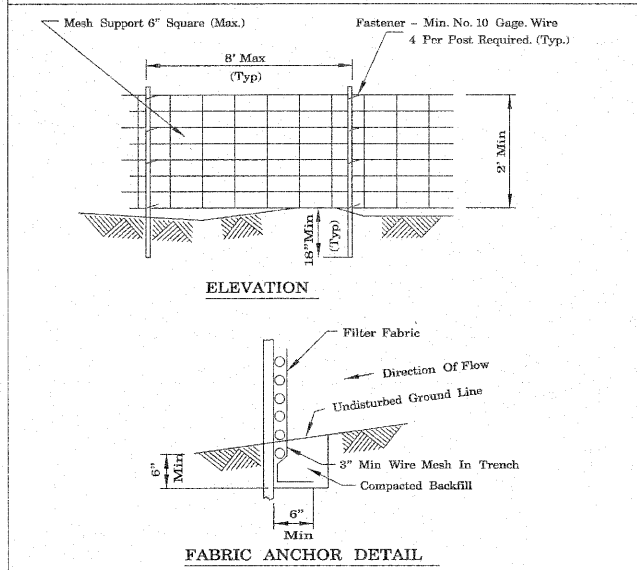

NOTES:

- Wires of mesh support shall be min. gage no. 12.
- Temporary sediment fence shall be installed prior to any grading work in the area to be protected. They shall be maintained throughout the construction period and removed in conjunction with the final grading and site stabilization.
- Filter fabric shall meet the requirements of material specification 592 Geotextile Table 1 or 2, Class with equivalent opening size of at least 30 for nonwoven and 50 for woven.
- Fence posts shall be either standard steel post or wood post with a minimum cross-sectional area of 3.0 sq. in.

| | | |
|--|---|---|
| REFERENCE Project _____ Designed _____ Date _____ Checked _____ Date _____ Approved _____ Date _____ | NRCS National Resource Conservation Service | STANDARD DWG. NO. IL-620W SHEET 1 OF 2 DATE: 3-3-06 |
|--|---|---|

PAID FOR AS "PERIMETER EROSION BARRIER"

| REVISIONS | |
|-----------|------|
| NAME | DATE |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

ILLINOIS DEPARTMENT OF TRANSPORTATION
EROSION AND SEDIMENT CONTROL PLANS
DETAILS

50 0 50
SCALE IN FEET
DATE 6/11/2010

DRAWN BY DJK
CHECKED BY JRV