

041

01-17-2020 LETTING ITEM 041

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	2020-1 WEED SPRAY	IL	5	1
ILLINOIS			CONTRACT NO. 66K75	

INDEX OF SHEETS

- 1 COVER SHEET
- 2 GENERAL NOTES
- 3 SUMMARY OF QUANTITIES
- 4 SCHEDULES
- 5 HAND SPRAY RESTRICTION MAP



LIST OF ILLINOIS DOT HIGHWAY STANDARDS

- 701101-05 OFF-ROAD OPERATIONS, MULTILANE, 15' (4.5 m) TO 24' (600 mm) FROM PAVEMENT EDGE
- 701106-02 OFF-ROAD OPERATIONS, MULTILANE, MORE THAN 15' (4.5 m) AWAY
- 701426-09 LANE CLOSURE, MULTILANE INTERMITTENT OR MOVING OPERATION, FOR SPEEDS ≥ 45 MPH
- 701901-08 TRAFFIC CONTROL DEVICES

PROPOSED HIGHWAY PLANS

VARIOUS ROUTES SECTION 2020-1 WEED SPRAY WEED SPRAYING GRUNDY AND IROQUOIS COUNTIES

C-93-035-20

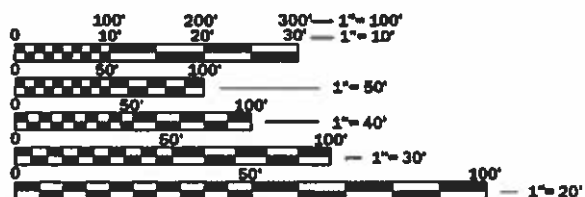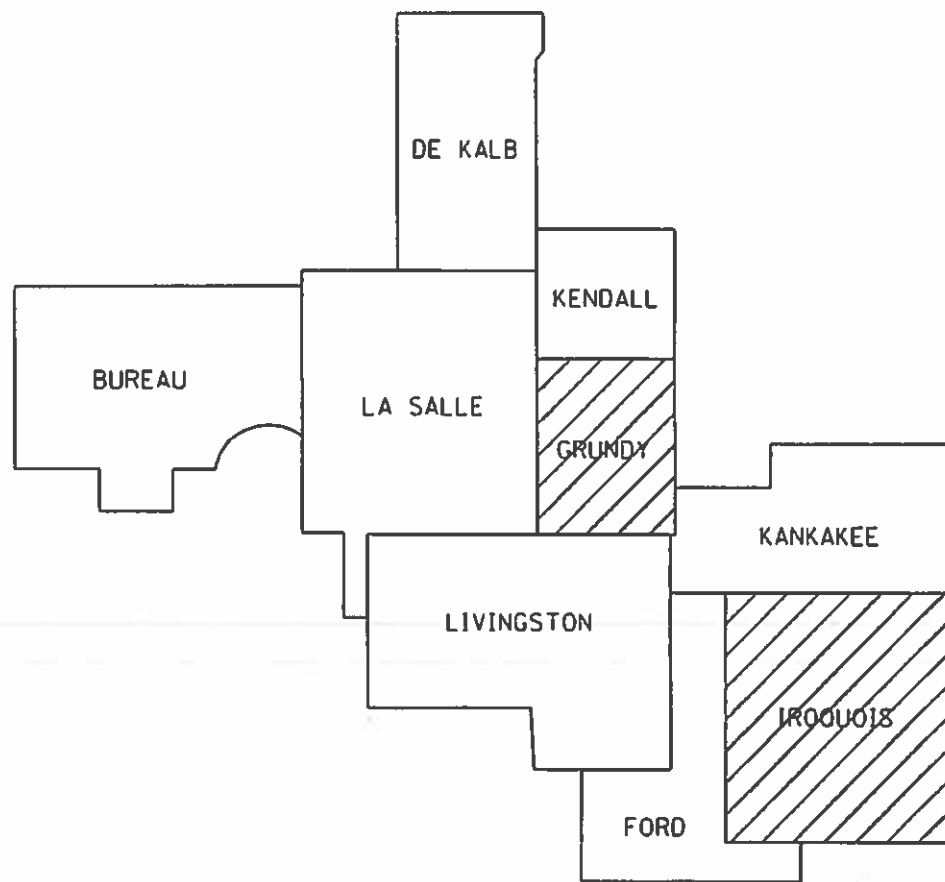

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-8123
OR 811

PROJECT ENGINEER: BRAD DUNCAN, P.E.
UNIT CHIEF: DARCY CARPENTER
DISTRICT 3 NO. (815) 434-6131
CONTRACT NO. 66K75

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED Oct 17, 2019

[Signature] REGIONAL ENGINEER

[Signature] ENGINEER OF DESIGN AND ENVIRONMENT

[Signature] DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

**PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS**

GENERAL NOTES

ANY REFERENCE TO A STANDARD IN THESE PLANS SHALL BE INTERPRETED TO MEAN THE EDITION AS INDICATED BY THE SUBNUMBER SHOWN IN THE LIST OF STANDARDS OR THE COPY INCLUDED IN THESE PLANS.

THE FOLLOWING RATES OF APPLICATION HAVE BEEN USED IN CALCULATING PLAN QUANTITIES:

HERBICIDE / INGREDIENTS	APPLICATION RATE		PAY ITEM
MILESTONE	6	OUNCES / ACRE	WEED CONTROL, BROADLEAF IN TURF
M50 CONCENTRATE WITH LECH-TECH	1	QUART / 100 GALLONS OF WATER	N/A
WATER	30	GALLONS MINIMUM / ACRE	N/A

COMMITMENTS:

RESIDENT ENGINEER SHOULD ALSO CONTACT MIKE SCHMOTZER AT (815) 434-0819, OR YOGESH PATEL AT (815) 434-8418, TO GO OVER ALL SPRAY LOCATIONS BEFORE SPRAYING COMMENCES. SUBSEQUENT SPRAYINGS WILL BE CONDUCTED BY THE YARDS THEMSELVES, SO IT WILL BE USEFUL FOR THE YARDS TO KNOW.

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DISTRICT THREE
AS BUILT INFORMATION

SUPERVISING CONSTRUCTION FIELD ENGINEER

RESIDENT ENGINEER / TECHNICIAN

START & END DATES
OF CONSTRUCTION:

INSPECTORS:

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DISTRICT THREE

PREPARED BY: *Tom Benoit*
DISTRICT STUDIES & PLANS ENGINEER

DATE: 10-17-19

EXAMINED BY: *Kyle Vidgen*
DISTRICT CONSTRUCTION ENGINEER

Michelle Ash
DISTRICT MATERIALS ENGINEER

Tom Hays
DISTRICT OPERATIONS ENGINEER

* GRUNDY AND IROQUOIS COUNTIES

MODEL: Delivar
FILE: MANIC: user:\blakemoor\del_illinois\2019\PROJECTS\Documents\DOT_Office\DOT\19-066K75\CADD\A\19-066K75-01.dwg

USER NAME = pltschr	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100.0000' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = 10/3/2019	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

GENERAL NOTES

SCALE: _____ SHEET _____ OF _____ SHEETS STA. _____ TO STA. _____

F.A. RTE:	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	2020-1 WEED SPRAY		5	2
			CONTRACT NO. 66K75	
ILLINOIS FED. AID PROJECT				

MODEL: Default
 FILE: \\nrcs-pub\pub\rooms\dat\illinois\pwr\WIDOT\Documents\DOT_Offices\District_3\Projects\66K75\CADD\66K75\66K75-03-xxxx-sht-qty.tbl.dgn

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	CONSTRUCTION CODE	
				100% STATE	100% STATE
				ROADWAY	ROADWAY
				0031	0031
				GRUNDY CO.	IROQUOIS CO.
67100100	MOBILIZATION	L SUM	1	0.5	0.5
K0029618	WEED CONTROL , BROADLEAF IN TURF	GALLON	8	4	4

USER NAME = pletschtr	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100.0000 ' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = 9/20/2019	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

SUMMARY OF QUANTITIES

SCALE: _____ SHEET ___ OF ___ SHEETS STA. _____ TO STA. _____

* GRUNDY AND IROQUOIS COUNTIES

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	2020-1 WEED SPRAY	*	5	3
			CONTRACT NO. 66K75	
		ILLINOIS	FED. AID PROJECT	

I 80 GRUNDY COUNTY								
START MILEPOST	END MILEPOST	DIRECTION	LENGTH	WIDTH	AREA	ACRE	GALLONS	COMMENTS
116	112	WB	21120	20	422400	9.70	0.45	I-80 WB BRISBON RD INTERCHANGE TO IL 47 INTERCHANGE (MEDIAN ONLY)
112	116	EB	21120	20	422400	9.70	0.45	I-80 EB IL 47 INTERCHANGE TO BRISBON RD INTERCHANGE (MEDIAN ONLY)
TOTALS					844800	19.39	0.91	

NOTE: RESIDENT ENGINEER TO IDENTIFY EXACT LOCATIONS IN THE FIELD. SEE HERBICIDE RESTRICTION MAPS IN COMMITMENT FILE FOR EXCLUSIONS.

I 55 GRUNDY COUNTY								
START MILEPOST	END MILEPOST	DIRECTION	LENGTH	WIDTH	AREA	ACRE	GALLONS	COMMENTS
227	221	SB	31680	36	1140480	26.18	1.23	I-55 SB GARDNER INTERCHANGE TO 1 MILE NORTH OF IL 47 INTERCHANGE
221	227	NB	31680	36	1140480	26.18	1.23	I-55 NB 1 MILE NORTH OF IL 47 INTERCHANGE TO THE GARDNER INTERCHANGE
TOTALS					2280960	52.36	2.45	

NOTE: RESIDENT ENGINEER TO IDENTIFY EXACT LOCATIONS IN THE FIELD. SEE HERBICIDE RESTRICTION MAPS IN COMMITMENT FILE FOR EXCLUSIONS.

I 57 IROQUOIS COUNTY								
START MILEPOST	END MILEPOST	DIRECTION	LENGTH	WIDTH	AREA	ACRE	GALLONS	COMMENTS
297	293	SB	21120	35	739200	16.97	0.80	I-57 SB CLIFTON INTERCHANGE TO ASHKUM INTERCHANGE (NO MEDIAN)
293	297	NB	21120	35	739200	16.97	0.80	I-57 SB ASHKUM INTERCHANGE TO CLIFTON INTERCHANGE (NO MEDIAN)
296.1	296.1	SB	200	66	13200	0.30	0.01	I-57 SB (SLOPE OF SN 038-0014) (TO BE HAND SPRAYED)
296.1	296.1	NB	200	66	13200	0.30	0.01	I-57 NB (SLOPE OF SN 038-0014) (TO BE HAND SPRAYED)
CLIFTON INTERCHANGE								
297		NB	627	457	286539	6.58	0.31	I-57 NB OFF RAMP (NE QUAD INFIELD)
		NB	500	320	160000	3.67	0.17	I-57 NB ON RAMP (NE QUAD GORE AREA)
		SB	494	457	225758	5.18	0.24	I-57 SB OFF RAMP (SW QUAD INFIELD)
		SB	389	225	87525	2.01	0.09	I-57 SB OFF RAMP (SW QUAD GORE AREA)
ASHKUM INTERCHANGE								
293			758	346	262268	6.02	0.28	I-57 NB (NE QUAD INFIELD) ADJACENT TO ON RAMP TO I-57 NB
			420	471	197820	4.54	0.21	I-57 NB OFF RMP (SE QUAD)
			500	532	266000	6.11	0.29	I-57 SB OFF RAMP (NW QUAD INFIELD)
			654	309	202086	4.64	0.22	I-57 OFF RAMP (SW QUAD GORE AREA)
TOTALS					3192796	73.30	3.44	

NOTE: RESIDENT ENGINEER TO IDENTIFY EXACT LOCATIONS IN THE FIELD. SEE HERBICIDE RESTRICTION MAPS IN COMMITMENT FILE FOR EXCLUSIONS.

MODEL: Default
FILE: \\s:\pub\lanscom.d\at\links\gov\PI\DOT\Documents\DOT - Offices\Dir\ctc_3\projects\0366K75\CADD\at\03xxx-ctc-draw\01.dgn

* GRUNDY AND IROQUOIS COUNTIES

USER NAME = pletschr	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100,0000' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = 10/2/2019	DATE - _____	REVISED - _____

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SCHEDULES	
SCALE: _____	SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	2020-1 WEED SPRAY	*	5	4
			CONTRACT NO. 66K75	
		ILLINOIS FED. AID PROJECT		

66K75 IROQUOIS CO.
I-57 HAND SPRAY LOCATION MAP



BEGIN HAND SPRAYING
0.25 MILE NE OF BRIDGE
ABUTMENT.

END HAND SPRAYING
0.25 MILE SW OF BRIDGE
ABUTMENT.

Google earth
© 2018 Google



MODEL: Default
 FILE: \\nas01c.psu.edu\baronm\data\illinois\dot\Documents\DOT_Offices\District 3\Projects\66K75\CADD\66K75_CADD\66K75-0018-45-01-01.dgn

* GRUNDY AND IROQUOIS COUNTIES

USER NAME = pletschr	DESIGNED - _____	REVISED - _____
	DRAWN - _____	REVISED - _____
PLOT SCALE = 100,000' / in.	CHECKED - _____	REVISED - _____
PLOT DATE = 10/3/2019	DATE - _____	REVISED - _____

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

HAND SPRAY RESTRICTION MAP

SCALE: _____ SHEET ____ OF ____ SHEETS STA. _____ TO STA. _____

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	2020-1 WEED SPRAY	*	5	5
CONTRACT NO. 66K75				
ILLINOIS		FED. AID PROJECT		