


F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	*	**	10	1
ILLINOIS				

* D3 BRIDGE DECK SEALING FY 2025
** BUREAU & LIVINGSTON COUNTIES

D-93-013-25

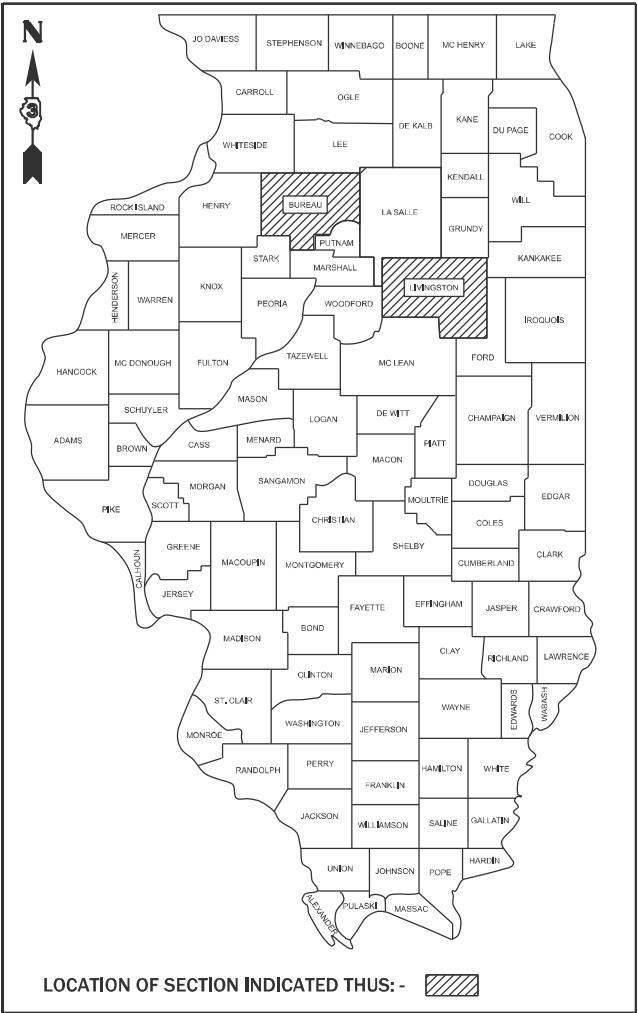

LOCATION OF SECTION INDICATED THUS: - [hatched pattern]

INDEX OF SHEETS

- 1 COVER SHEET
- 2 GENERAL NOTES
- 3 SUMMARY OF QUANTITIES
- 4-7 SCHEDULES
- 8-9 LOCATION MAPS
- 10 DETAILS



LIST OF ILLINOIS DOT HIGHWAY STANDARDS

- 000001-08 STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
- 701201-05 LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS ≥ 45 MPH
- 701400-12 APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
- 701406-13 LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY
- 701411-09 LANE CLOSURE, MULTILANE, AT ENTRANCE OR EXIT RAMP FOR SPEEDS ≥ 45 MPH
- 701426-09 LANE CLOSURE, MULTILANE INTERMITTENT OR MOVING OPERATION, FOR SPEEDS ≥ 45 MPH
- 701428-01 TRAFFIC CONTROL, SETUP AND REMOVAL, FREEWAY/EXPRESSWAY
- 701456-05 PARTIAL EXIT RAMP CLOSURE FREEWAY/EXPRESSWAY
- 701501-06 URBAN LANE CLOSURE, 2L, 2W, UNDIVIDED
- 701601-09 URBAN LANE CLOSURE, MULTILANE, 1W OR 2W WITH NONTRAVERSABLE MEDIAN
- 701606-10 URBAN LANE CLOSURE, MULTILANE, 2W WITH MOUNTABLE MEDIAN
- 701901-10 TRAFFIC CONTROL DEVICES

PROPOSED
HIGHWAY PLANS

VARIOUS ROUTES
SECTION D3 BRIDGE DECK SEALING FY 2025
PROJECT
BRIDGE DECK SEALING
BUREAU & LIVINGSTON COUNTIES

C-93-036-25

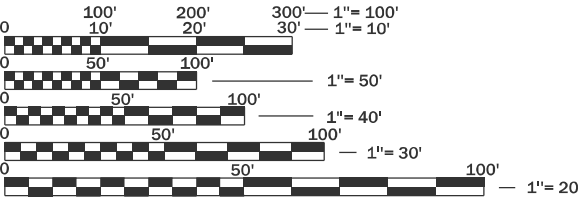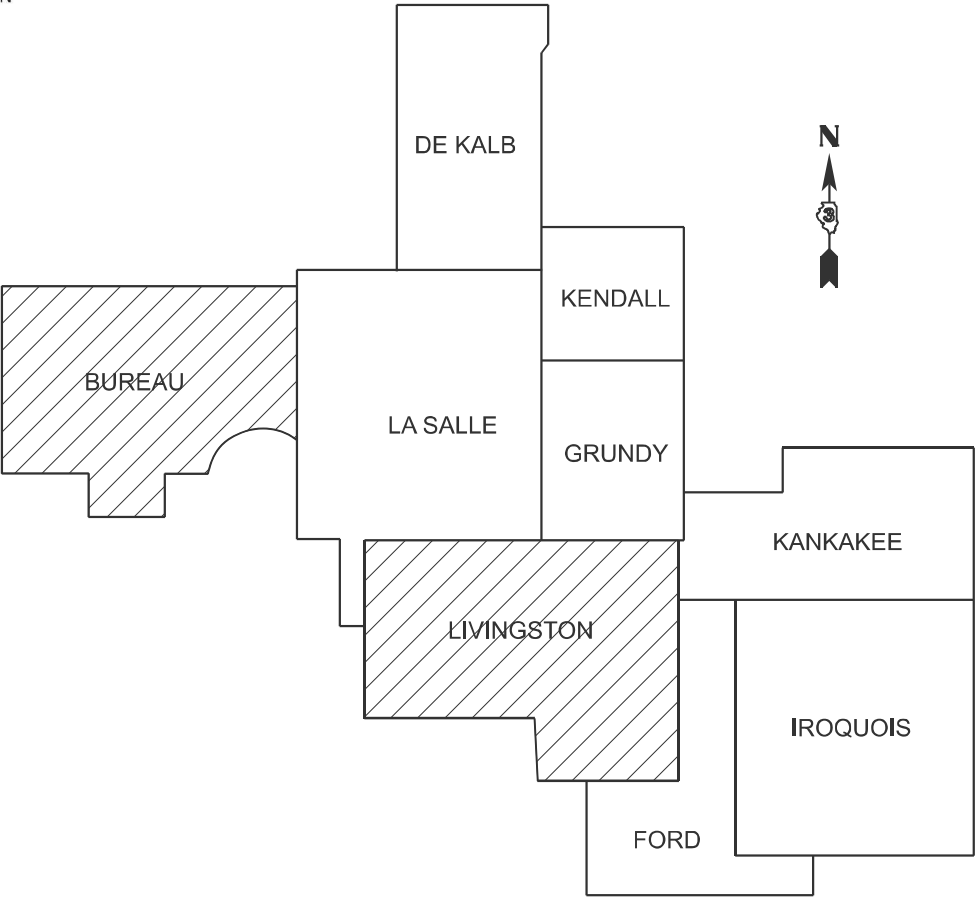

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

PROJECT ENGINEER: JOSEPH KANNEL, P.E.
UNIT CHIEF: MOHAMED YOUSIF
DISTRICT 3 NO. (815) 434-6131
CONTRACT NO. 66P90

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED October 3, 2024
Trisha Thompson REGIONAL ENGINEER
December 6, 2024
Scott A. Etk ENGINEER OF DESIGN AND ENVIRONMENT
December 6, 2024
James J. Quinn DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION 13

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

GENERAL NOTES

ANY REFERENCE TO A STANDARD IN THESE PLANS SHALL BE INTERPRETED TO MEAN THE EDITION AS INDICATED BY THE SUBNUMBER SHOWN IN THE LIST OF STANDARDS OR THE COPY INCLUDED IN THESE PLANS.

THE ENGINEER WILL BE THE SOLE JUDGE CONCERNING CURING TIME FOR THE BRIDGE DECK CONCRETE SEALER.

THE CONTRACTOR SHALL NOT DISTURB THE EXISTING PAVEMENT MARKING OR RAISED REFLECTIVE PAVEMENT MARKERS. THE CONTRACTOR SHALL REPLACE AT NO ADDOTOINAL COST TO THE DEPARTMENT, ANY PAVEMENT MARKING OR RAISED REFLECTIVE PAVEMENT MARKERS DAMAGED BY HIS OPERATION.

COMMITMENTS

- 1) CHANGES / ADJUSTMENTS IN DECK SEALING QUANTITIES LISTED IN THIS CONTRACT MUST BE PROVIDED TO THE DISTRICT VIA AS-BUILTS AND SCANNED COPIES SENT TO PROGRAM DEVELOPMENT & OPERATIONS.
- 2) DELETION OR ADDITION OF STRUCTURES TO BE SEALED MUST BE PROVIDED WITH JUSTIFCATION FOR APPROVAL, THIS INFORMATION IS TO BE SENT TO THE PROJECT ENGINEER AND BRIDGE MAINTENANCE SECTION.

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DISTRICT THREE
AS BUILT INFORMATION

SUPERVISING CONSTRUCTION FIELD ENGINEER

RESIDENT ENGINEER / TECHNICIAN

START & END DATES
OF CONSTRUCTION:

INSPECTORS:

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

GENERAL NOTES

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	*	**	10	2
CONTRACT NO. 66P90				
		ILLINOIS	FED. AID PROJECT	

* D3 BRIDGE DECK SEALING FY 2025
** BUREAU & LIVINGSTON COUNTIES

Model: Default
File Name: p:\projects\new_bentley.com\p\DOT\Documents\DOT 0 ces\Bentley 31080 Project\0366P90\CAOD\0366P90_COVER_SHEET_IDOTeng.dgn

CODE NO.	ITEM	UNIT	TOTAL QUANTITY	CONSTRUCTION CODE	
				100% STATE BUREAU	100% STATE LIVINGSTON
				BRIDGE	BRIDGE
				0047	0047
67100100	MOBILIZATION	L SUM	1	0.5	0.5
70100420	TRAFFIC CONTROL AND PROTECTION, STANDARD 701411	EACH	7	6	1
70100450	TRAFFIC CONTROL AND PROTECTION, STANDARD 701201	L SUM	1	0.5	0.5
70100700	TRAFFIC CONTROL AND PROTECTION, STANDARD 701406	L SUM	1	0.5	0.5
70100825	TRAFFIC CONTROL AND PROTECTION, STANDARD 701456	L SUM	1	0.5	0.5
70102620	TRAFFIC CONTROL AND PROTECTION, STANDARD 701501	L SUM	1	0.5	0.5
70102625	TRAFFIC CONTROL AND PROTECTION, STANDARD 701606	L SUM	1	0.5	0.5
70102630	TRAFFIC CONTROL AND PROTECTION, STANDARD 701601	L SUM	1	0.5	0.5
70107025	CHANGEABLE MESSAGE SIGN	CAL DA	36	18	18
X5870015	BRIDGE DECK CONCRETE SEALER	SQ FT	1201102	851557	349545

* D3 BRIDGE DECK SEALING FY 2025
** BUREAU & LIVINGSTON COUNTIES

	USER NAME = Mohamed,Yousif	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
		DRAWN -	REVISED -						VAR	*	**	10	3	
	PLOT SCALE = \$SCALES	CHECKED -	REVISED -						CONTRACT NO. 66P90					
	PLOT DATE = 9/19/2024	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO	STA.			
												ILLINOIS	FED. AID PROJECT	

MODEL Default
FILE Name: c:\pwwindows\dot\o ces\Bentley\3080 Projects\0366P90\CAOD\366P90_LOCATION_MAP_IDOTeng.dgn

CONCRETE SEALER SCHEDULE - BUREAU COUNTY									
STRUCTURE NUMBER	FACILITY CARRIED	APPROXIMATE LOCATION	FEATURE CROSSED	DECK	PARAPET	MEDIAN	DECK	SEAL	TRAFFIC CONTROL AND PROTECTION STANDARD
				WIDTH	SURFACE	SURFACE	LENGTH	AREA	
				FEET	FEET	FEET	FEET	SQ FT	
BUREAU COUNTY - INTERSTATE STRUCTURES - 48									
006-0001	I-80 EASTBOUND	1.04 E/HENRY CO LN	KING CREEK	40.2	7.4		98.2	4,674	701406
006-0002	I-80 WESTBOUND	1.05 E/HENRY CO LN	KING CREEK	40.2	7.4		98.2	4,674	701406
006-0003	I-80 EASTBOUND	1.51 E/HENRY CO LN	BARBARA DITCH	40.2	7.4		73.5	3,499	701406
006-0004	I-80 WESTBOUND	1.52 E/HENRY CO LN	BARBARA DITCH	40.2	7.4		73.5	3,499	701406
006-0005	I-80 EASTBOUND	3.44 E/HENRY CO LN	ABBOTT DITCH	40.2	7.4		178	8,473	701406
006-0006	I-80 WESTBOUND	3.45 E/HENRY CO LN	ABBOTT DITCH	40.2	7.4		178	8,473	701406
006-0007	I-80 EASTBOUND	3.81 E/HENRY CO LN	COAL CREEK	40	7.6		176	8,378	701406
006-0008	I-80 WESTBOUND	3.82 E/HENRY CO LN	COAL CREEK	40	7.6		176	8,378	701406
006-0009	I-80 EASTBOUND	1.0 MI. W. OF IL 40	DRAINAGE DITCH	40.5	7.6		136	6,542	701406
006-0010	I-80 WESTBOUND	1.0 MI. W. OF IL 40	DRAINAGE DITCH	40.5	7.6		136	6,542	701406
006-0014	I-80 EASTBOUND	2 MI N WYANET	MAPLE GROVE CREEK	43.7	7.6		113.2	5,807	701406
006-0015	I-80 WESTBOUND	2 MI N WYANET	MAPLE GROVE CREEK	43.7	7.6		113.2	5,807	701406
006-0016	I-80 WESTBOUND	2 MI N WYANET	WEST BUREAU CREEK	34	7.4		43	1,780	701406
006-0017	I-80 EASTBOUND	2 MI N WYANET	WEST BUREAU CREEK	34	7.4		94.8	3,925	701406
006-0020	I-80 EASTBOUND	2.8 MI W O I-180	US 34	40	7.6		138.6	6,597	701406
006-0021	I-80 WESTBOUND	2.8 MI W O I-180	US 34	40	7.6		138.6	6,597	701406
006-0038	I-180 NORTHBOUND	4 MI E. OF PRINCETON	I-80	26.5	4.8		273.2	8,551	701456
006-0039	I-180 SOUTHBOUND	4 MI E. OF PRINCETON	I-80	26.5	4.8		272.2	8,520	701456
006-0041	I-180 SOUTHBOUND	3.4 MI S JCT FAI 80	EAST BUREAU CREEK	39	5		150.1	6,604	701406
006-0042	I-180 NORTHBOUND	3.4 MI S JCT FAI 80	EAST BUREAU CREEK	39	5		147.5	6,490	701406
006-0043	I-180 NORTHBOUND	1.1 MI N ILL 26	BRUSH CREEK	39	5		191	8,404	701406
006-0044	I-180 SOUTHBOUND	1.1 MI N ILL 26	BRUSH CREEK	39	5		191	8,404	701406
006-0045	I-180 SOUTHBOUND	2 MI NW BUREAU JCT	ILL 26	39	5		212.5	9,350	701406, 701411
006-0046	I-180 NORTHBOUND	2 MI NW BUREAU JCT	ILL 26	39	5		212.5	9,350	701406, 701411
006-0047	I-180 SOUTHBOUND	0.5 MI S JCT ILL 26	EAST BUREAU CREEK	39	5		211.1	9,288	701406, 701411 SB
006-0048	I-180 NORTHBOUND	0.5 MI S JCT ILL 26	EAST BUREAU CREEK	39	5		211.1	9,288	701406
006-0049	I-180 SOUTHBOUND	0.7 MI S ILL 26	IAIS RR ,I & M CANAL	39	5		716.8	31,539	701406
006-0050	I-180 NORTHBOUND	0.7 MI S ILL 26	IAIS RR, I & M CANAL	39	5		716.8	31,539	701406
006-0055	I-180 EASTBOUND	3 MI W HENNEPIN	FAP 318 NB	39	5		328.4	14,450	701406
006-0056	I-180 EASTBOUND	3 MI W HENNEPIN	I-180 RMP 10.01	39	5		234	10,296	701406
006-0057	I-180 EASTBOUND	2 MI SW BUREAU JCT.	IL 29(SBI29A)&IAIS RR	63	5		393	26,724	701406, 701411
006-0058	I-180 WESTBOUND	2 MI. SW BUREAU JCT.	IL 29(SBI29A)&IAIS RR	69.7	5		383.8	28,670	701406, 701411
006-0059	I-180 WESTBOUND	1.5 MI W HENNEPIN	IL 26 & BUREAU CRK	39	5		401	17,644	701406, 701411
006-0060	I-180 EASTBOUND	1.5 MI W HENNEPIN	ILL 26 & BUREAU CRK.	39	5		401	17,644	701406
006-0151	I-80 EASTBOUND	2 MI. W. OF IL 26	BUREAU CREEK	40	7.4		292	13,841	701406
006-0152	I-80 WESTBOUND	2 MI. W. OF IL 26	BUREAU CREEK	40	7.4		292	13,841	701406
006-0167	I-80 EASTBOUND	1.9 MI E JCT ILL 89	ILLINOIS RY	40	7.6		154.5	7,354	701406
006-0168	I-80 WESTBOUND	1.9 MI E JCT ILL 89	ILLINOIS RY	40	7.6		154.5	7,354	701406
006-0170	I-80 EASTBOUND	4.6 MI E JCT FAI 180-MP 65.6	CREEK & TR 352	40	7.6		310.1	14,761	701406
006-0171	I-80 WESTBOUND	4.6 MI E JCT FAI 180-MP 65.6	CREEK & TR 352	40	7.6		356.9	16,988	701406
006-0172	I-80 EASTBOUND	1.2 MI E JCT FAI 180-MP 62.2	E. BUREAU CREEK	40.3	7.6		172.1	8,244	701406
006-0173	I-80 WESTBOUND	1.2 MI E JCT FAI 180-MP 62.2	E. BUREAU CREEK	40.3	7.6		172.1	8,244	701406
006-0174	I-80 EASTBOUND	1.8 MI W ILL 89-MP 68.3	NEGRO CREEK	40.8	7.6		221	10,696	701406
006-0175	I-80 WESTBOUND	1.8 MI W ILL 89-MP 68.3	NEGRO CREEK	40.8	7.6		221	10,696	701406
006-0176	I-80 EASTBOUND	2.6 MI W OF I-180	BN RR	42.4	7.6		275.9	13,795	701406
006-0177	I-80 WESTBOUND	2.6 MI W OF I-180	BN RR	42.4	7.6		275.9	13,795	701406
006-0184	I-80 EASTBOUND	0.9 MI W OF IL 40	HENNEPIN CANAL	41	7.6		185.2	9,001	701406
006-0185	I-80 WESTBOUND	0.9 MI W OF IL 40	HENNEPIN CANAL	41	7.6		185.2	9,001	701406
INTERSTATE STRUCTURES SUB-TOTAL								514,011	

* D3 BRIDGE DECK SEALING FY 2021
** BUREAU & LIVINGSTON COUNTIES

	USER NAME = Mohamed.Yousif	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -						VAR	*	**	10	4
	PLOT SCALE = \$SCALE\$	CHECKED -	REVISED -						CONTRACT NO. 66P90				
	PLOT DATE = 9/19/2024	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		

MODEL - Default
FILE: Mntc12.pwt\\klot-ew.bentley.com\\P\\DOT\\Documents\\DOT - O ces\\Dist\\IL_3\\OND - Project\\D366P90\\CADD\\Data\\66P90 - LOCATION MAP - IDOTeng.dgn

CONCRETE SEALER SCHEDULE - BUREAU COUNTY									
STRUCTURE NUMBER	FACILITY CARRIED	APPROXIMATE LOCATION	FEATURE CROSSED	DECK	PARAPET	MEDIAN	DECK	SEAL	TRAFFIC CONTROL AND PROTECTION STANDARD
				WIDTH	SURFACE	SURFACE	LENGTH	AREA	
				FEET	FEET	FEET	FEET	SQ FT	
BUREAU COUNTY - NON-INTERSTATE STRUCTURES - 46									
006-0083	ILL ROUTE 29 AND 26	0.3 MI N JCT ILL 26	BUREAU CR OVERFLOW	34	7.4		308	12,751	701201
006-0084	ILL ROUTE 29	0.1 MI S JCT ILL 26	BUREAU CREEK	35.9	7.4		218	9,439	701201
006-0085	FAP 318 NB	3 MI W OF HENNEPIN	I-180 EX RMP 1001	39	5		372.7	16,399	701406
006-0086	ILL 40	3.1 MI S JCT ILL 92	WALNUT SPECIAL DITCH	40	7.4		42.8	2,029	701201
006-0098	IL 92	0.9 MI W JCT ILL 40	BAKERS DR DITCH	28.5	7.4		72	2,585	701201
006-0101	ILL 92	.7 MI W VAN ORIN	BR MASTERS CR	32	7.4		60.3	2,376	701201
006-0114	TISKILWA SPUR	0.3 MI N TISKILWA	BUREAU CREEK	32	7.4		379	14,933	701201
006-0116	FAS 244/BACKBONE RD	1.8 MI W JCT ILL 26	I-80	28	7.6		208.5	7,423	701201
006-0123	TR 148	3.0 MI. E. OF IL 40	I-80	24	1.83		216.7	5,597	701201
006-0124	TR 188	4.3 MI W JCT ILL 26	I-80	24	1.83		235	6,070	701201
006-0125	TR 241	0.9 MI S JCT FAI 80	I-180	30.5	5		277.6	9,855	701201
006-0126	TR 281	1.4 MI N ILL 26	I-180	28.5	5		314	10,519	701201
006-0127	TR 322(2600E)	1.6 MI E JCT I-180	I-80	24	1.83		217.5	5,618	701201
006-0128	TR 333	2.5 MI N JCT ILL 29	I-180	26.5	5		282.9	8,911	701201
006-0129	TR 364 (3000E)	1.4 MI N SEATONVILLE	I-80	24	1.83		250	6,458	701201
006-0131	CH 27	0.5 MI W JCT I-180	I-80	24	1.83		221.5	5,721	701201
006-0132	CH 19	3.0 MI E JCT I-180	I-80	26	1.83		217.8	6,061	701201
006-0133	TR 370 (3100E)	2.2 MI W ILL 89	I-80	24	1.83		268.3	6,930	701201
006-0135	US RT 34	1.1MI NE JCT ILL 26	BN RR	42.5	5		348.8	16,568	701201
006-0137	US 6	1.3 MI E OF I-180	E BUREAU CREEK	30	7.4		156	5,834	701201
006-0140	US 6	WEST EDGE OF SHEFFIELD	COAL CREEK	32	7.6		130.4	5,164	701201
006-0142	ILL 89	0.8 MI S ARLINGTON	BRANCH OF BRUSH CR.	32	1.8		63.5	2,146	701201
006-0143	ILL 29	NORTHEAST EDGE DEPUE	NEGRO CREEK	32	7.4		153.3	6,040	701201
006-0144	US RT 6	IN SEATONVILLE	NEGRO CREEK	32	7.4		105.3	4,149	701201
006-0145	ILL 40	1.2 MI S OF BUDA	COAL CREEK	32	7.4		118	4,649	701201
006-0148	IL 26 & IL 29	S EDGE BUREAU JCT.	HENNEPIN CANAL	32	7.4		168	6,619	701501
006-0149	ILL 92	1.6 MI. W. US 34	BUREAU CREEK	32	7.4		306	12,056	701201
006-0153	IL 92	3.3 MI. W. OF US 34	STREAM	32	7.4		82.1	3,235	701201
006-0154	US 6/34	1 MI. W OF PRINCETON	BIG BUREAU CREEK	40	7.4		235.2	11,148	701201
006-0155	IL 29	EAST EDGE OF DEPUE	DRAINAGE DITCH	32	7.4		116	4,570	701201
006-0156	IL 40	3.5 MI. N. OF I-80	HICKORY CREEK	40	7.4		74.1	3,512	701201
006-0157	IL 40	3 MI. N. OF I-80	DITCH # 4	40	7.4		65	3,081	701201
006-0159	IL 26	0.3 MI. NW OF I-180	E. BUREAU CREEK	44	7.6	14.2	317.4	20,885	701601
006-0160	IL 92	1 MI. E. OF WALNUT	UNNAMED STREAM	32	7.4		78.5	3,093	701201
006-0161	US 6 & 34	AT EAST EDGE WYANET	WEST BUREAU CREEK	36	7.4		150	6,510	701201
006-0162	IL 26	N. EDGE OF PRINCETON	I-80	66.5	7.6	9	216.5	17,991	701601
006-0163	NEW BEDFORD RD	0.6 MI W JCT IL 40	GREEN RIVER	28	7.6		165	5,874	701201
006-0164	IL 89	0.60 MI S OF US 6	IAIS RAILROAD	30	4.6		230	7,958	701501
006-0169	US RT 6	W OF DEPUE SPUR	BRUSH CREEK	32	7.6		127	5,029	701201
006-0181	IL 89	0.5 MI S JCT US 34	PIKE CREEK	32	7.6		145	5,742	701201
006-0182	US 34	0.5 MI SW OF LAMOILLE	PIKE CREEK	32	7.6		105	4,158	701201
006-0183	US 34	1 MI NE OF LAMOILLE	PIKE CREEK	32	7.6		105	4,158	701201
006-0187	IL 26	N OF PRINCETON BY PARK	BIG BUREAU CREEK	40	7.6		255	12,138	701201
006-0188	IL 89	6.3 MI N OF I-80	BRUSH CREEK	33	7.4		70	2,828	701201
006-0189	IL 92	1.0 MI E OF IL 172	HENNEPIN FEEDERCANAL	32	7.6		114.8	4,546	701201
006-0190	TR 82-C	2.5 MI W OF IL 40	I-80	28	7.6		230	8,188	701201
NON-INTERSTATE STRUCTURES SUB-TOTAL								337,546	
BUREAU COUNTY TOTALS								851,557	

* STRUCTURE HAS EXISTING PCC OVERLAY. ADDITIONAL DRYING TIME MAY BE REQUIRED.

* D3 BRIDGE DECK SEALING FY 2021
** BUREAU & LIVINGSTON COUNTIES

	USER NAME = Mohamed.Yousif	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					VAR	I	FP	10	5
	PLOT SCALE = \$SCALE\$	CHECKED -	REVISED -					CONTRACT NO. 66P90				
	PLOT DATE = 9/19/2024	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	


Model Default
FILE NAME: prj\illdot-aw-bentley.com\prj\illdot\Documents\DOT 0 ces\District 3\ORR0 Project\0366P90\CADD\DS3\66P90 LOCATON MAP IDOTeng.dgn

CONCRETE SEALER SCHEDULE - LIVINGSTON COUNTY									
STRUCTURE NUMBER	FACILITY CARRIED	APPROXIMATE LOCATION	FEATURE CROSSED	DECK WDTH	PARAPET SURFACE	MEDIAN SURFACE	DECK LENGTH	SEAL AREA	TRAFFIC CONTROL AND PROTECTION STANDARD
				FEET	FEET	FEET	FEET	SQ FT	
LIVINGSTON COUNTY - NON-INTERSTATE STRUCTURES - 47									
053-0002	OLD RT 66/FAS 294	7.7 MI S OF ILL 116	DRAINAGE DITCH	32	1		74	2,442	701201
053-0003	OLD RT 66/FAS 294	4.5 MI S ILL 116	ROOKS CREEK	32	1		215.5	7,112	701201
053-0005	OLD RT 66/FAS 294	1.3 MI S ILL 116	TURTLE CREEK	33	1		63.2	2,149	701201
053-0007	ILL 116 EASTBOUND	0.6 MILE SOUTH OF ILL 23	VERMILLION RIVER	40	7.4		229	10,855	701601
053-0008	ILL 116 WESTBOUND			40	7.4		229	10,855	701601
053-0019	US 24	EAST EDGE FAIRBURY	INDIAN CREEK	39.3	7.4		163	7,612	701201
053-0026	ILL 17	1.3 MI E JCT ILL 17 & 23	VERMILLION RIVER	32	7.4		324.1	12,770	701201
053-0027	ILL 17	2.5 MI E JCT ILL 17 & 23	DRAINAGE DITCH	32	7.4		60.8	2,396	701201
053-0038	ILL 17	0.2 MI W OF ILL 47	GOOSEBERRY CREEK	44	1.6		32	1,459	701501
053-0047	ILL 47	0.3 MI N OF ILL 116	5 MILE CREEK	32	7.4		124.8	4,917	701201
053-0061	ILL 18	0.58 MI N OF ILL 17	NORFOLK & SOUTHERN R	36	1		125.8	4,655	701201
053-0064	ILL 116	3.9 MI W OF I-55	ROOKS CREEK	39.4	1.2		75.8	3,077	701201
053-0066	ILL 116	1.1 MI E OF I-55	TURTLE CREEK	48	1.6	4	54.5	2,921	701606
053-0075	ILL 116	2.9 MI W OF ILL 47	FELKY SLOUGH	36			116	4,176	701201
053-0135	TR 101	4 MI NE OF PONTIAC	I-55	26.5	5		265.33	8,358	701201
053-0147	ILL 17	4.5 MI E OF ILL 47	GOOSEBERRY CR TRIB	32	7.6		118.8	4,704	701201
053-0148	ILL 23	0.67 MI N OF I-55	WOLF CREEK	46			91	4,186	701201
053-0150	ILL 17	6.1 MI E OF ILL 47	MAZON RIVER	36	7.6		181.6	7,918	701201
053-0153	ILL 23	1.05 MI S OF ILL 17	PRAIRIE CREEK	42.5	1		145	6,308	701201
053-0154	ILL 23	3.46 MI S OF ILL 17	LONG POINT CREEK	46	7.4		200	10,680	701201
053-0157	FAS 370 (LONG POINT RD)	0.93 MI W OF IL 23	LONG POINT CREEK	28			108.6	3,041	701201
053-0158	ILL 17	1.33 MI W OF I-55	W FORK MAZON RIVER	32	74		107	11,342	701201
053-0160	ILL 17	1.0 MI E OF ILL 23	PRAIRIE CREEK	32	7.4		80.3	3,164	701201
053-0162	IL 170	3.82 MI S OF ILL 17	BR OF MUD CREEK	32	7.4		59.4	2,340	701201
053-0163	ILL 170	4.3 MI S OF ILL 17	BR OF MUD CREEK	32	7.4		67.8	2,671	701201
053-0164	ILL 170	6.2 MI S OF ILL 17	BR OF MUD CREEK	32	7.4		43.2	1,702	701201
053-0165	ILL 170	6.9 MI S OF ILL 17	BR OF BAKER RUN	32	7.4		54.9	2,163	701201
053-0166	ILL 47	0.9 MI S ILL 116	5 MILE CREEK	32	7.4		150.9	5,945	701201
053-0167	ILL 17	2.8 MI E OF ILL 17/23	DRAINAGE DITCH	32	7.4		107	4,216	701201
053-0168	ILL 47	0.4 MI S OF US 24	VERMILION RIVER	36	7.4		181.5	7,877	701501
053-0169	ILL 47	8.9 MI S OF US 24	INDIAN CREEK	36	7.4		91.3	3,962	701201
053-0170	ILL 47	0.2 MI S OF ILL 116	5 MILE CREEK	50.7	7.4		98	5,694	701201
053-0174	ILL 23	2.1 MI S OF I-55	NORTH CREEK	40	7.4		83.8	3,972	701201
053-0175	FAU 6322/OLD 66 NB	0.1 MILES NORTH OF IL 23	INTERMITTENT STREAM	33.9	1		121.4	4,237	701601
053-0176	FAU 6322/OLD 66 SB			33.9	1		121.4	4,237	701601
053-0177	ILL 23	1.3 MI W OF CORNELL	VERMILION RIVER	32	7.6		334	13,226	701201
053-0178	ILL 116	2.2 MI E OF ILL 47	5 MILE CREEK	32	7.6		92	3,643	701201
053-0179	ILL 47	3.6 MI S OF ILL 116	VERMILION RIVER	36	7.6		192	8,371	701201
053-0181	ILL 116	0.04 MI W OF ILL 47	5 MILE CREEK	46	7.6		91	4,878	701201
053-0182	ILL 17	3.4 MI E OF ILL 47	DRAINAGE DITCH	36	7.6		105	4,578	701201
053-0183	ILL 23	5.7 MI S OF ILL 17	MOLE CREEK	32	7.6		107.5	4,257	701201
053-0185	ILL 17	7.7 MI E OF ILL 47	STREAM	36	7.6		83.3	3,632	701201
053-0188	US 24	FORREST - W OF IL 47	S FORK VERMILION RIVER	30	7.6		228.6	8,595	701501
053-0189	IL 23	7.31 MI S OF IL 17	SHORT POINT CREEK	37.4	7.6		151.5	6,818	701201
053-0190	IL 116	1.9 MI E OF JCT IL 116 & IL 23	SMITH BRANCH	36	7.6		70.5	3,074	701201
053-0191	IL 116	2.53 MI E OF JCT IL 116 & IL 23	SMITH BRANCH	37.5	7.6		73	3,292	701201
053-0192	IL 116	2.68 MI W OF I-55	ROOKS CREEK	38	7.6		190.3	8,678	701201
NON-INTERSTATE STRUCTURES SUB-TOTAL								259,154	
LIVINGSTON COUNTY TOTALS								349,545	

* STRUCTURE HAS EXISTING PCC OVERLAY. ADDITIONAL DRYING TIME MAY BE REQUIRED.

* D3 BRIDGE DECK SEALING FY 2021
** BUREAU & LIVINGSTON COUNTIES

	USER NAME = Mohamed,Yousif	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SCHEDULE				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -						VAR	*	**	10	7
	PLOT SCALE = 5\$CALES	CHECKED -	REVISED -						CONTRACT NO. 66P90				
	PLOT DATE = 9/19/2024	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		

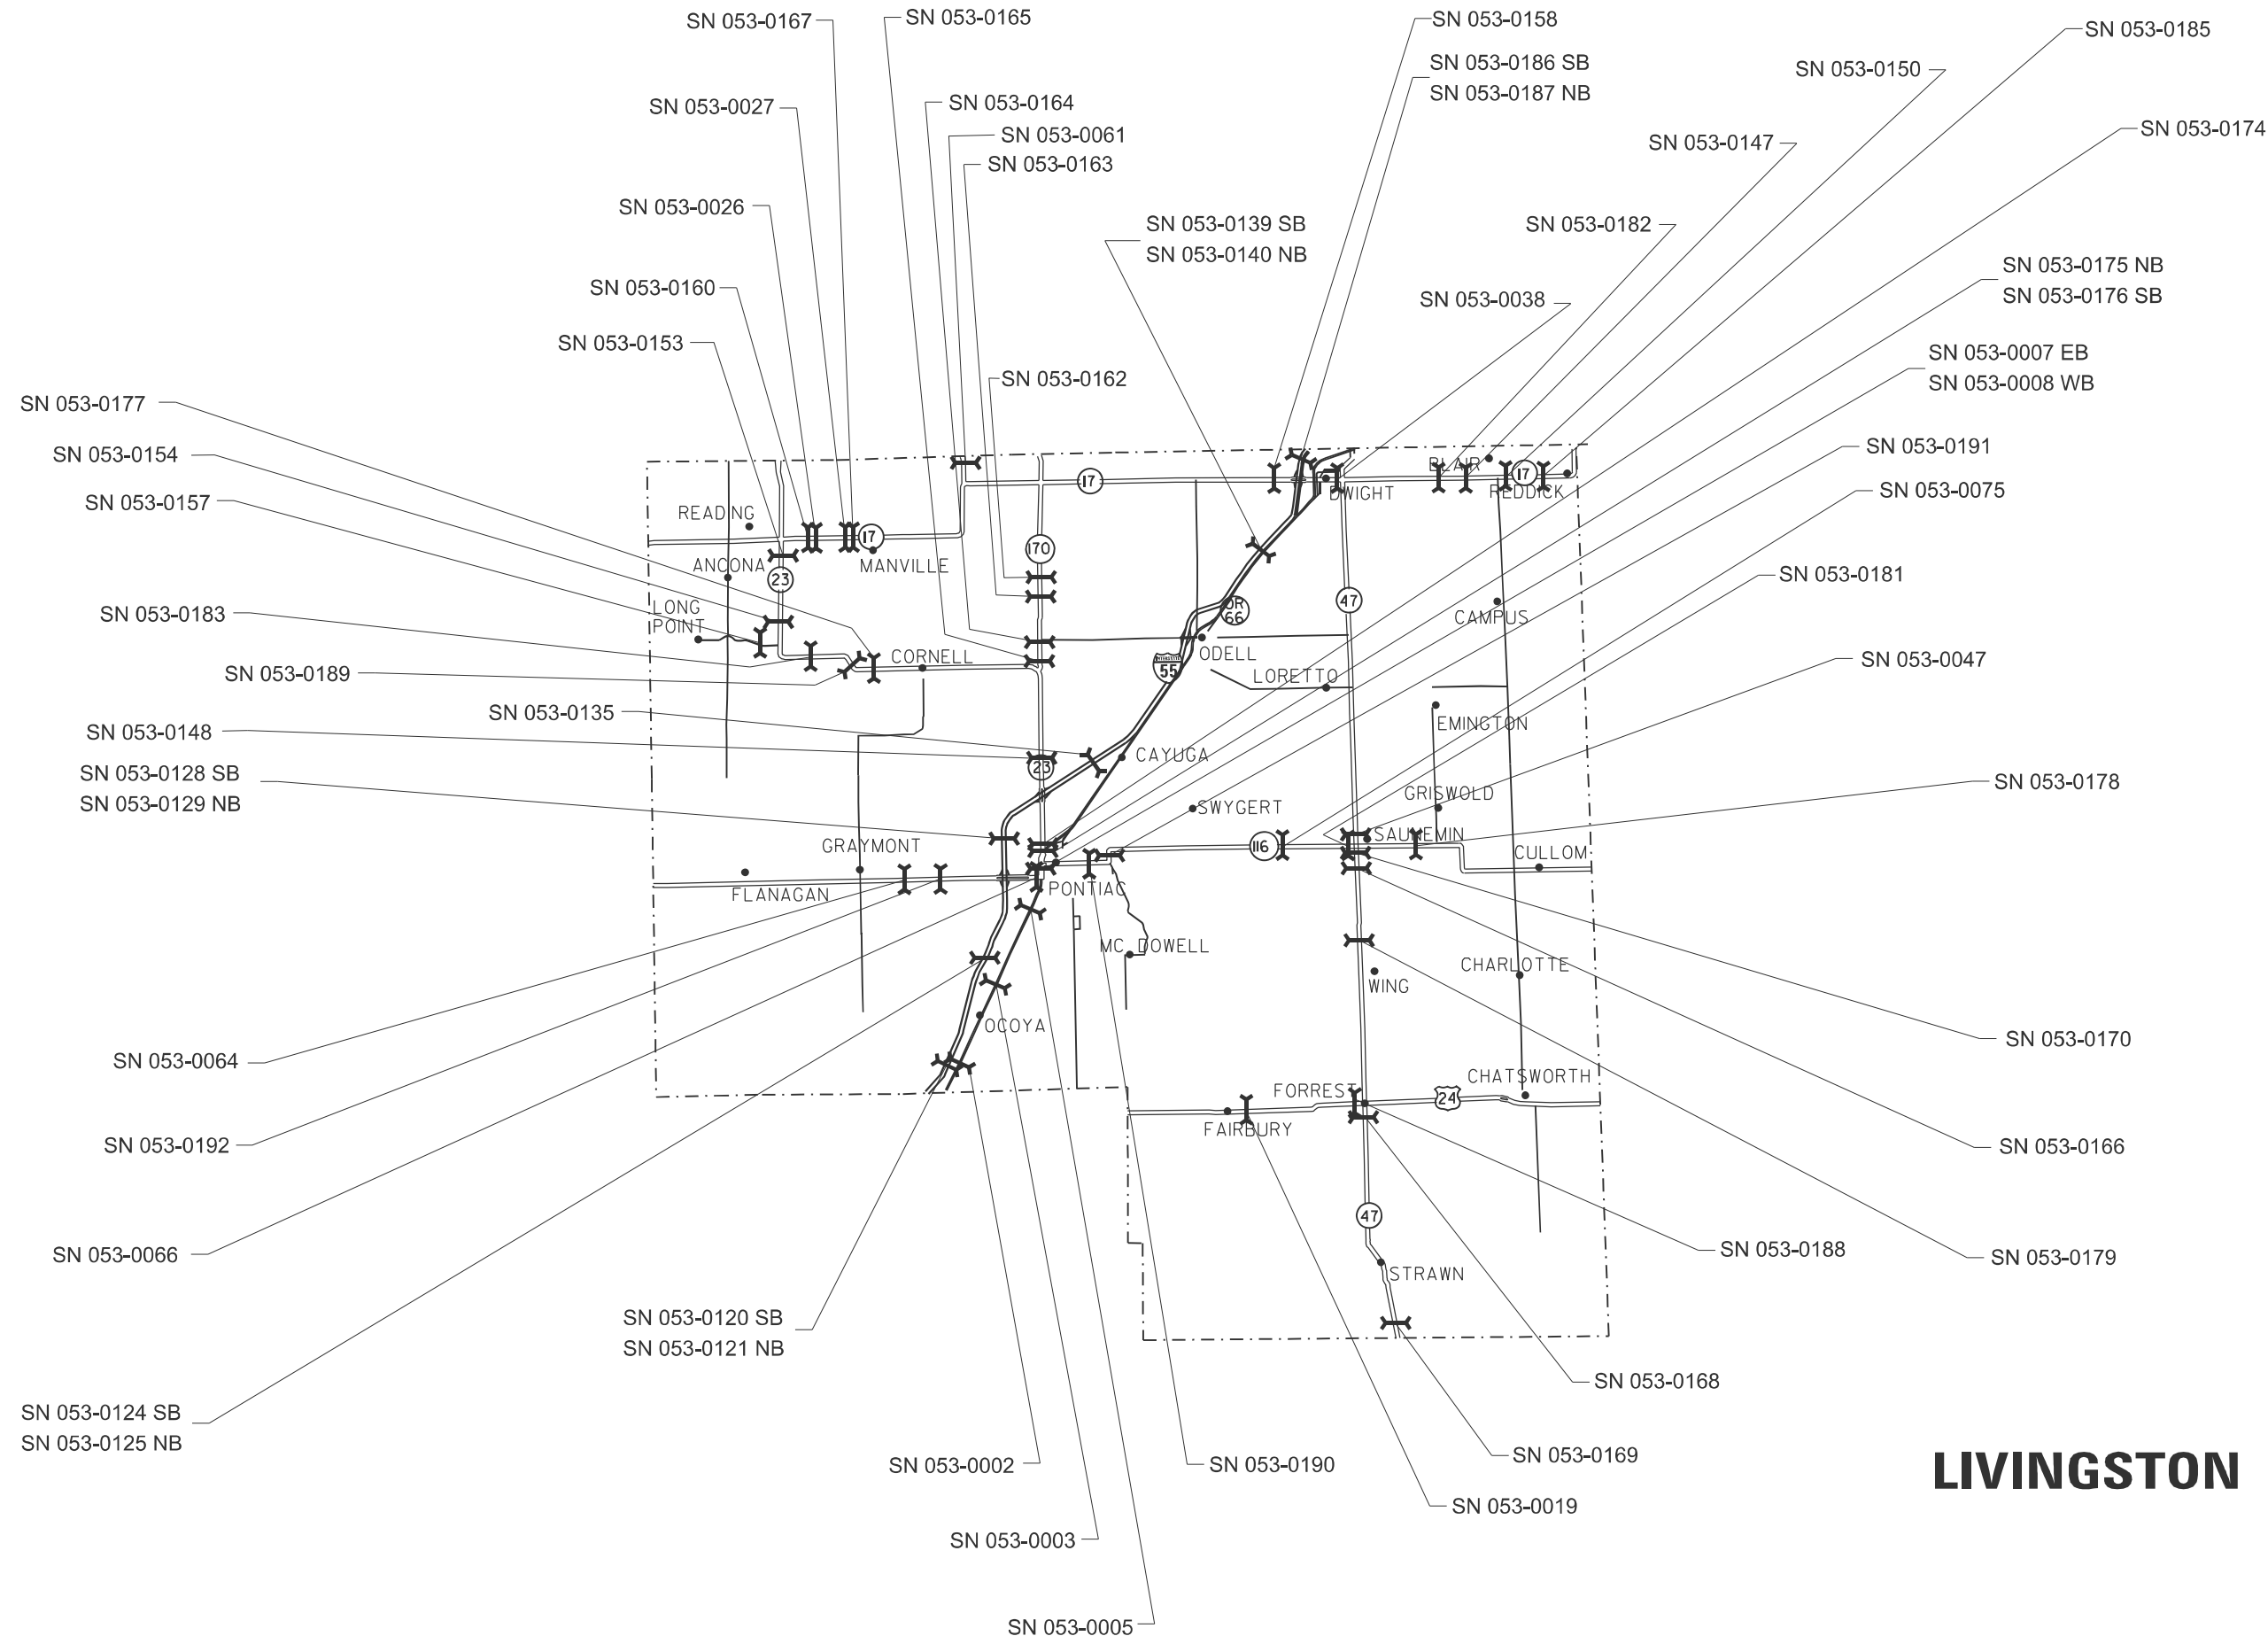

LIVINGSTON COUNTY

* D3 BRIDGE DECK SEALING FY 2021
** BUREAU & LIVINGSTON COUNTIES

MODEL: Default FILE NAME: p:\illicit-aw-bentley.com\PIV\DOT\Documents\DOT 0 cas\District 3\ORR Project\0366P90\CAD\Drawings\66P90 LOCATION MAP IDOTeng.dgn	USER NAME = Mohamed,Yousif	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	LOCATION MAP				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -						VAR	*	**	10	9
	PLOT SCALE = %\$SCALE\$	CHECKED -	REVISED -						CONTRACT NO. 66P90				
	PLOT DATE = 9/19/2024	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		

PLAN VIEW

NOTE: BRIDGE APPROACH PAVEMENT SHALL NOT BE SEALED.

EXISTING PAVEMENT MARKINGS, RAISED REFLECTIVE PAVEMENT MARKERS AND LINEAR DELINEATOR ON THE BARRIER WALL SHALL BE TEMPORARILY COVERED PRIOR TO APPLICATION OF THE DECK SURFACE TREATMENT TO PREVENT THE MATERIAL FROM BEING APPLIED TO THE MARKINGS AND TO PROTECT THE REFLECTIVE PROPERTIES OF THE MARKINGS.

THE TEMPORARY COVERING MATERIAL USED SHALL BE SUCH THAT IT WILL NOT AFFECT THE MARKING'S REFLECTIVITY WHEN REMOVED AFTER APPLICATION OF THE DECK SURFACE TREATMENT AND PRIOR TO OPENING TO TRAFFIC. COST INCLUDED WITH CONCRETE SEALER.

EXISTING EXPANSION JOINTS SHALL BE TEMPORARILY COVERED, PRIOR TO APPLICATION OF THE DECK SURFACE TREATMENT, TO PREVENT THE MATERIAL FROM BEING APPLIED TO THE JOINTS. THE TEMPORARY COVERING SHALL BE REMOVED AFTER THE APPLICATION OF THE DECK SURFACE TREATMENT AND PRIOR TO OPENING TO TRAFFIC. COST IS INCLUDED WITH CONCRETE SEALER.

 AREA TO BE SEALED

NOT TO SCALE

* D3 BRIDGE DECK SEALING FY 2021
** BUREAU & LIVINGSTON COUNTIES

FILE NAME: D:\PROJECTS\ILLINOIS\BRIDGE DECK & PARAPET SEALING DETAILS.dwg	USER NAME = Mohamed.Yousif	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	BRIDGE DECK & PARAPET SEALING DETAILS				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
		DRAWN -	REVISED -						VAR	*	**	10	10	
	PLOT SCALE = S\$CALES	CHECKED -	REVISED -											
	PLOT DATE = 9/25/2024	DATE -	REVISED -											
					SCALE:	SHEET	OF	SHEETS	STA.	TO STA.	CONTRACT NO. 66P90			
					ILLINOIS FED. AID PROJECT									

```
MODEL : Default
FILE NAME: p:\jldt-pw.bentley.com\p\jldt-pw\Documents\jDOT_O_cas\Distctc\3\ORD_Proj\ccts\ID366P90\CADData\66P90_LOCATION_MAP_IDOTeng.dgn
```