
SCHEDULE OF QUANTITIES

2)413546			AL VI VORINITES
QU/	MILLY	UNIT	ITEM
	32.5	SO FT	SIGN PANEL - TYPE 1
	18.75	SO FT	SIGN PANEL - TYPE 2
	1	EACH	SERVICE INSTALLATION - POLE MOUNTED
	954	FOOT	UNDERGROUND CONDUIT, GALVANIZED STEEL, 2" DIA.
	46	FOOT	UNDERGROUND CONDUIT, GALVANIZED STEEL, 21/2" DIA.
	139	FOOT	UNDERGROUND CONDUIT, GALVANIZED STEEL, 3" DIA.
	461	FOOT	UNDERGROUND CONDUIT, GALVANIZED STEEL, 4" DIA.
	5	EACH	HANDHOLE
	2	EACH	HEAVY-DUTY HANDHOLE
	2	EACH	DOUBLE HANDHOLE
	1	EACH	FULL-ACTUATED CONTROLLER AND TYPE IV CABINET
	1	EACH	TRANSCEIVER-FIBER OPTIC
	713	FOOT	ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 2C
••	1407	FOOT	ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 3C
	2522	FOOT	ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 5C
	320	FOOT	ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 7C
	3097	FOOT	ELECTRIC CABLE IN CONDUIT, LEAD-IN, NO. 14 1 PAIR
	118	FOOT	ELECTRIC CABLE IN CONDUIT, SERVICE, NO. 6 20
	842	FOOT	ELECTRIC CABLE IN CONDUIT, EQUIPMENT GROUNDING CONDUCTOR, NO. 6 IC
	2	EACH	TRAFFIC SIGNAL POST, GALVANIZED STEEL 14 FT.
	1	EACH	STEEL MAST ARM ASSEMBLY AND POLE 20 FT.
	1	EACH	STEEL MAST ARM ASSEMBLY AND POLE 28 FT.
	1	EACH	STEEL MAST ARM ASSEMBLY AND POLE 30 FT.
	i	EACH	STEEL COMBINATION MAST ARM ASSEMBLY AND POLE 38 FT.
	1	EACH	STEEL COMBINATION MAST ARM ASSEMBLY AND POLE 48 FT.
	8	FOOT	CONCRETE FOUNDATION, TYPE A
	4	FOOT	CONCRETE FOUNDATION, TYPE C
	20	FOOT	CONCRETE FOUNDATION, TYPE E 30-INCH DIAMETER
	35	FOOT	CONCRETE FOUNDATION, TYPE E 36-INCH DIAMETER
	9	EACH	SIGNAL HEAD, LED, 1-FACE, 3-SECTION, MAST ARM MOUNTED
	2	EACH	SIGNAL HEAD, LED, 1-FACE, 3-SECTION, BRACKET MOUNTED
	2	EACH	SIGNAL HEAD, LED, 1-FACE, 5-SECTION, MAST ARM MOUNTED
	1	EACH	SIGNAL HEAD, LED, 2-FACE, 3 SECTION, BRACKET MOUNTED
	11	EACH	TRAFFIC SIGNAL BACKPLATE, LOUVERED, ALUMINUM
	9	EACH	INDUCTIVE LOOP DETECTOR
	458	FOOT	PREFORMED DETECTOR LOOP
•	3	EACH	LIGHT DETECTOR
•	1	EACH	LIGHT DETECTOR AMPLIFIER
*	667	FOOT	EMERGENCY VEHICLE PRIORITY SYSTEM LINE SENSOR CABLE, NO. 20 3/C
	1	EACH	UNINTERRUPTABLE POWER SUPPLY, SPECIAL
			. 100% OF THE COST TO THE VILLAGE OF UNIVERSITY PARK

•• 667' IS USED FOR CONFIRMATION BEACONS (TO BE PAID FOR BY THE VILLAGE OF UNIVERSITY PARK) AND 740' IS USED FOR PEDESTRIAN SIGNAL HEADS

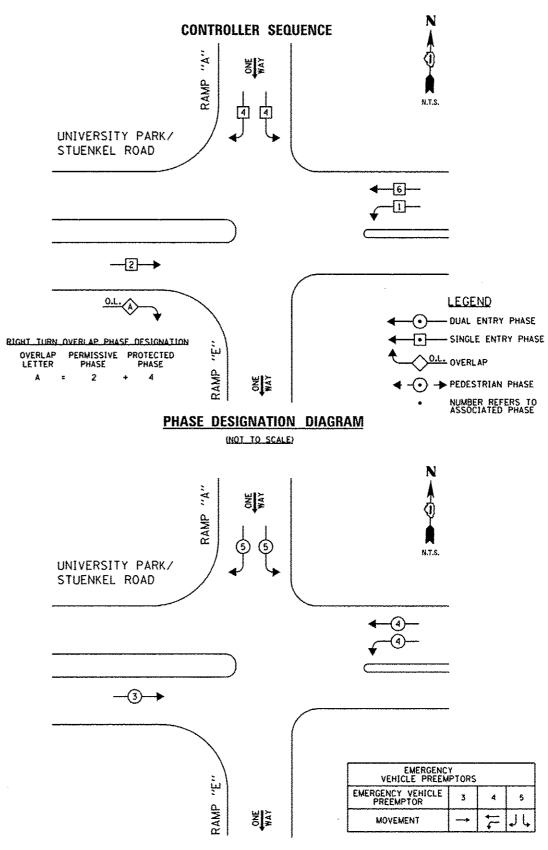

EMERGENCY VEHICLE PREEMPTION SEQUENCE

(NOT TO SCALE)

CINICU USER NAME + kprojopasi	DESIGNED - MG	REVISED A- ADDENDUM 1 1/03/14
\!NI _T H	DRAWN - MG	REVISED -
PLOT SCALE : 40.00000001.000000	CHECKED - KGP/VO	REVISED -
CONSUMMENTS PLOT DATE * 26-DEC-2013 14:57	DATE - 05/09/2013	REVISED -

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

SCHEDULE OF QUANTITIES, PHASE DESIGNATION DIAGRAM,				
AND EMERGENCY VEHICLE PREEMPTION SEQUENCE STUENKEL ROAD AT 1-57 RAMPS A AND E	F.A. RTI			
SCALE: AS NOTED SHEET NO. 12 OF 18 SHEETS STA. TO STA.	_			

COUNTY TOTAL SHEET NO. WILL 679 317 SECTION 99-1HB-R