




**PROPOSED TYPICAL SECTION
MEADE AVENUE
STA. 10+20 TO STA. 17+22.73**

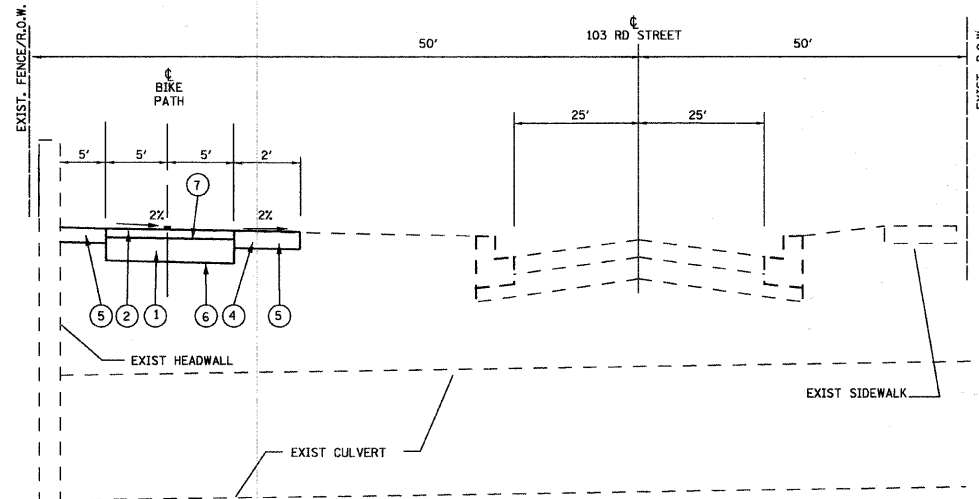


**PROPOSED TYPICAL SECTION
103rd STREET
STA. 124+20 TO STA. 125+69**

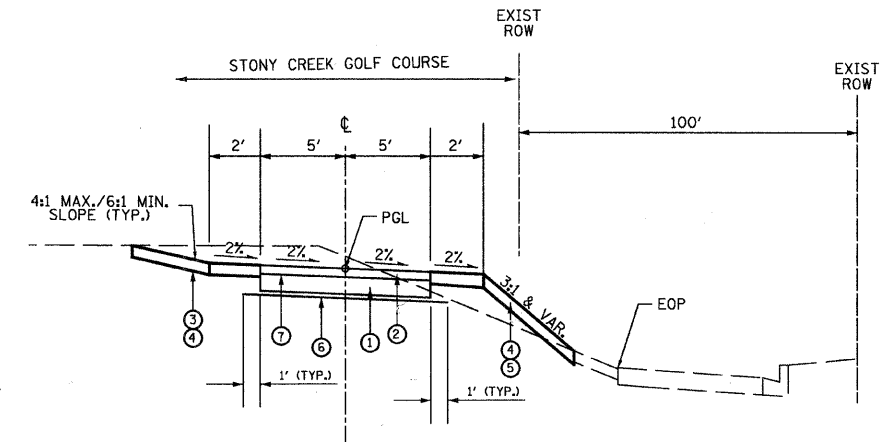


**PROPOSED TYPICAL SECTION
103rd STREET
STA. 100+00 TO STA. 108+00
STA. 115+00 TO STA. 125+99.72**

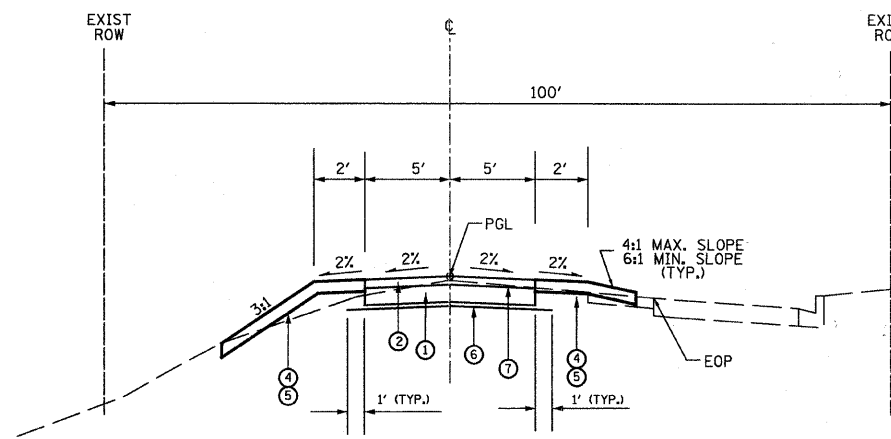

**PROPOSED TYPICAL SECTION
103rd STREET
STA. 108+00 TO STA. 115+00**

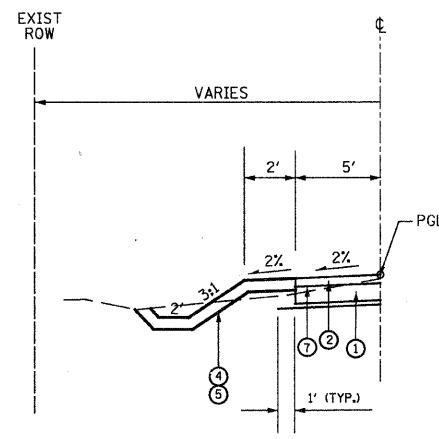

**PROPOSED TYPICAL SECTION
103rd STREET
STA. 111+00 TO STA. 114+00**

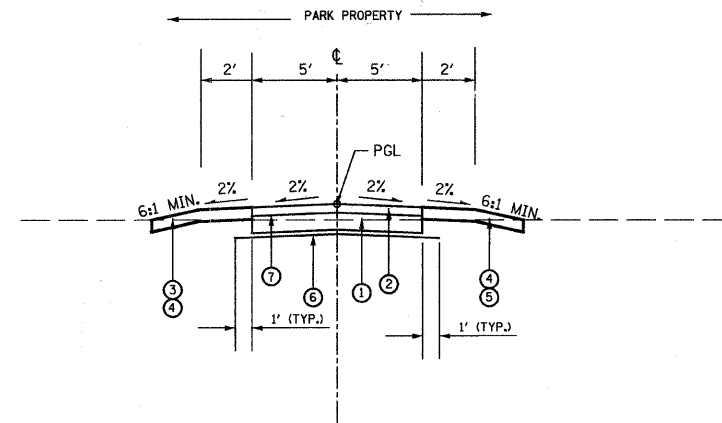

**PROPOSED TYPICAL SECTION
SPUR TO PARKING LOT
STA. 130+00 TO STA. 132+06.34**

LEGEND

- ① AGGREGATE BASE COURSE, TYPE B, 6 INCH
- ② HOT MIX ASPHALT SURFACE COURSE, MIX "C", N50, (IL 9.5 mm), 3 INCH
- ③ SODDING, SALT TOLERANT
- ④ TOPSOIL FURNISH AND PLACE, 6 INCH
- ⑤ SEEDING, CLASS 2A
- ⑥ GEOTECHNICAL FABRIC FOR GROUND STABILIZATION
- ⑦ PRIME COAT

HOT-MIX ASPHALT MIXTURE REQUIREMENTS	
ITEM	% VOIDS @ Ndes
HOT-MIX ASPHALT SURFACE COURSE MIX "C", N50 (IL 9.5mm); 3"	4% @ 50 Gyr.
LEVELING BINDER (HAND METHOD), N50 (IL 9.5mm)	4% @ 50 Gyr.

THE UNIT WEIGHT USED TO CALCULATE ALL HMA SURFACE MIXTURE QUANTITIES IS 112 LBS/50 YD³/IN

THE "AC TYPE" FOR POLYMERIZED HMA MIXES SHALL BE "SBS/SBR PG 70-22" AND FOR NON-POLYMERIZED HMA THE "AC TYPE" SHALL BE "PG 64-22" UNLESS MODIFIED BY DISTRICT ONE SPECIAL PROVISIONS. FOR "PERCENT OF RAP" SEE DISTRICT ONE SPECIAL PROVISIONS.

NOTE 1:
THE EXCAVATED MATERIAL CAN BE EITHER UNSUITABLE OR UNSTABLE MATERIAL WHICH IS TO BE DETERMINED BY THE ENGINEER AT THE TIME OF CONSTRUCTION. UNDERCUT DEPTHS ARE NOT A STANDARD 12 INCHES. DEPTHS OF UNDERCUTS SHALL BE DETERMINED BY THE ENGINEER DURING CONSTRUCTION.

NOTE 2:
GEOTECHNICAL FABRIC FOR GROUND STABILIZATION SHALL BE ONLY USED IN AREAS RECOMMENDED OR AS DETERMINED AT THE TIME OF CONSTRUCTION, BOTH AS DETERMINED BY THE ENGINEER.

NOTE 3:
PORTLAND CEMENT CONCRETE SIDEWALK 6" SHOULD BE PLACED ON LOCATIONS ACCORDING TO DETAIL ON SHEET NO. 9

NOTE 4:
WHERE CROSS DRAINAGE ACROSS THE PATH IS SHOWN ON THE CROSS SECTIONS, THE CONTRACTOR SHALL PROVIDE A CONSTANT CROSS SLOPE IN THE DIRECTION OF THE GROUND SLOPE.

REVISIONS	
NAME	DATE

URS 100 S. WACKER DR., SUITE 500 TEL (312) 939-1000
CHICAGO, IL, 60606 FAX (312) 939-4198

VILLAGE OF OAK LAWN

STONY CREEK BIKE TRAIL

PROPOSED TYPICAL SECTIONS

SCALE: NTS DRAWN BY: MIA
DATE: 12/01/09 CHECKED BY: Y00