

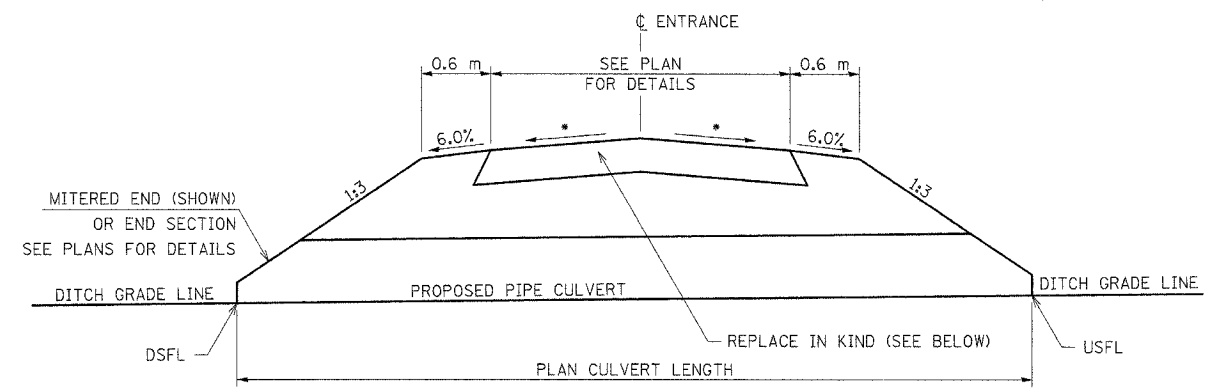
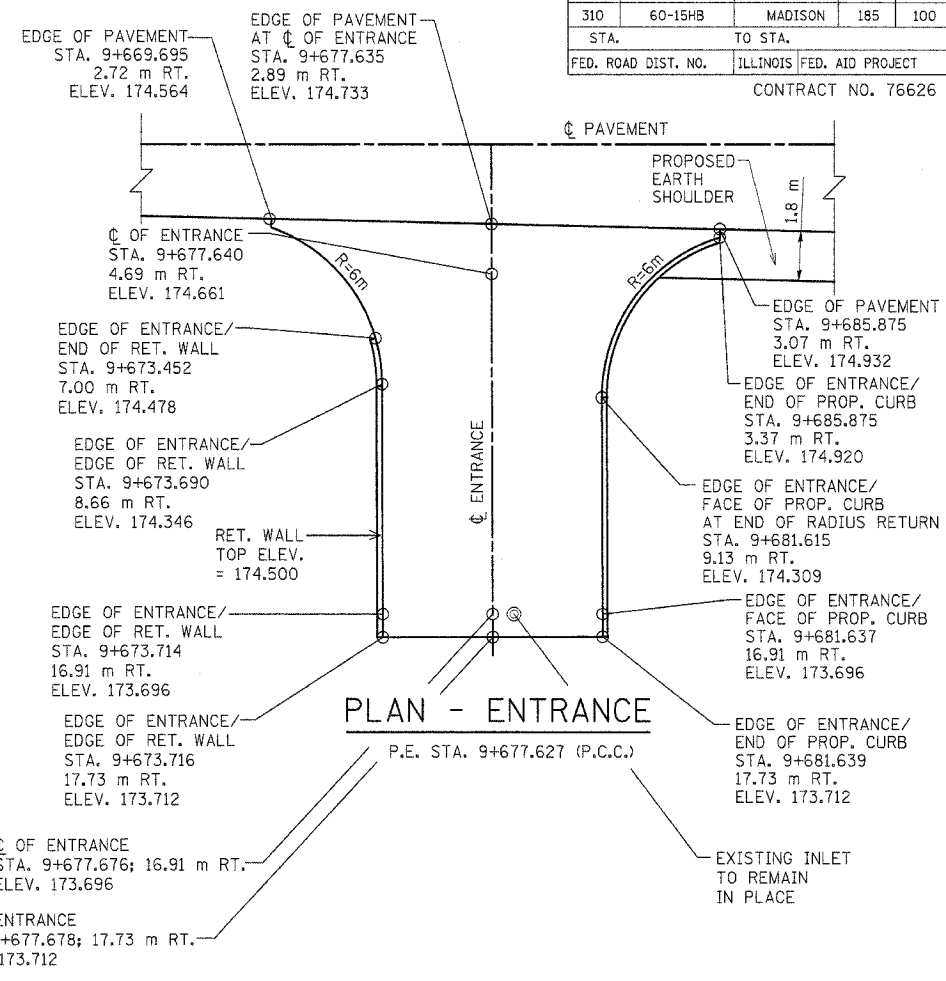
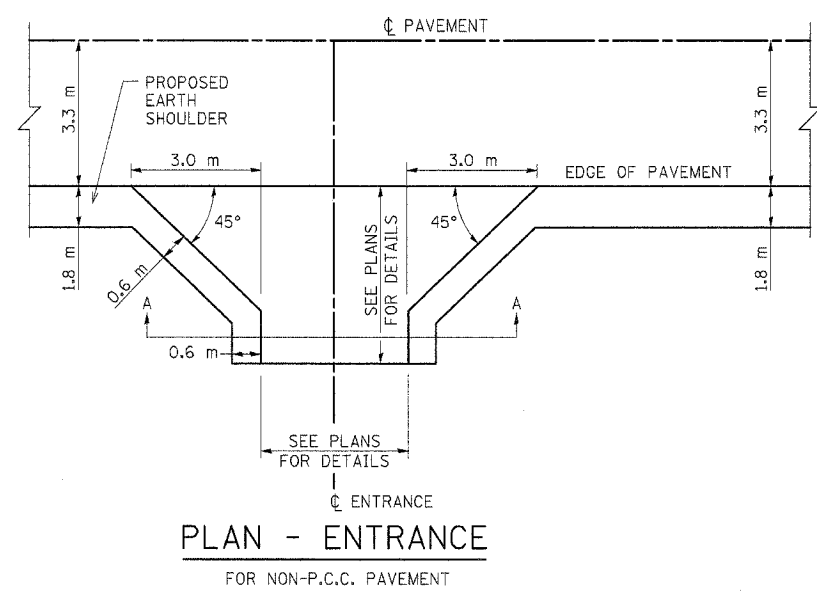


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
310	60-15HB	MADISON	185	100
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		
CONTRACT NO. 76626				

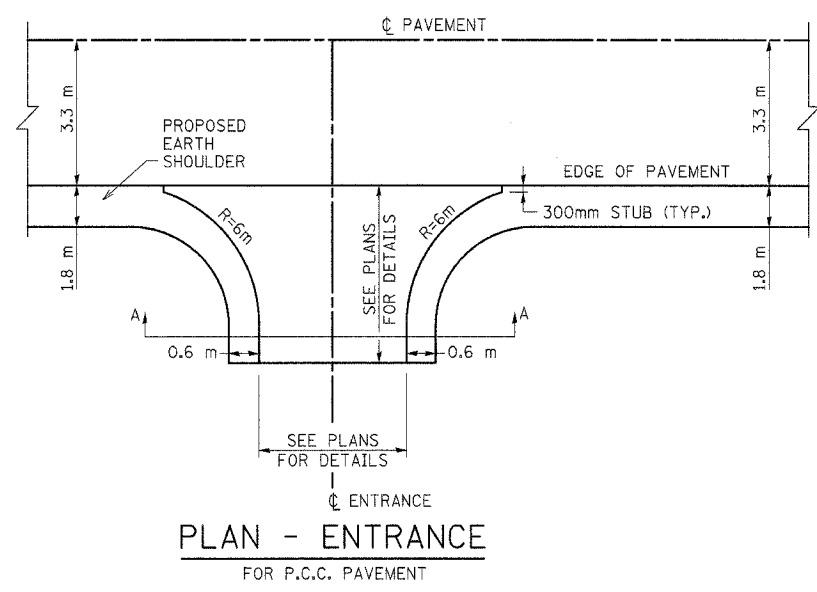


* 6% FOR AGGREGATE
2% FOR BITUMINOUS & CONCRETE


EXISTING	PROPOSED
EARTH	AGGREGATE SURFACE COURSE, TYPE B 150 mm - PE & FE
AGGREGATE	AGGREGATE SURFACE COURSE, TYPE B 150 mm - PE & FE
BIT. & CONC.	PCC DRIVEWAY PAVEMENT 150 mm - PE & CE

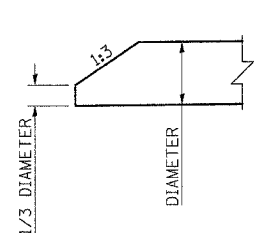

SECTION VIEW OF MITERED END
MITERED ENDS TO BE INCLUDED
IN THE TOTAL LENGTH OF THE PIPE



CONCRETE CURB TYPE B

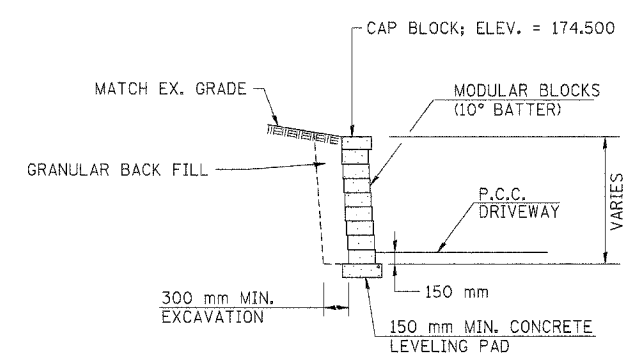

MODULAR RETAINING WALL SYSTEM

- NOTES:
- MODULAR RETAINING WALLS SHALL BE CONSTRUCTED TO MANUFACTURER'S SPECIFICATIONS AND TO THE APPROVAL OF THE ENGINEER.
 - THE SCHEMATIC REPRESENTATION SHOWN IN THE DRAWINGS IS ARBITRARY. APPROPRIATE ADJUSTMENTS SHALL BE MADE TO SUIT THE MANUFACTURER'S PRODUCT SIZE.
 - THIS WORK, INCLUDING EXCAVATION, SELECT FILL, CONCRETE BLOCKS, CONCRETE LEVELING PAD, AND OTHER ACCESSORIES SHALL BE INCLUDED IN THE PAY ITEM "MODULAR RETAINING WALL SYSTEM".

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
ENTRANCE DETAILS
WENZEL ROAD
SECTION 60-15HB
MADISON COUNTY

SCALE: NONE
DATE: 04/2005

DRAWN BY: JH
CHECKED BY: FML