
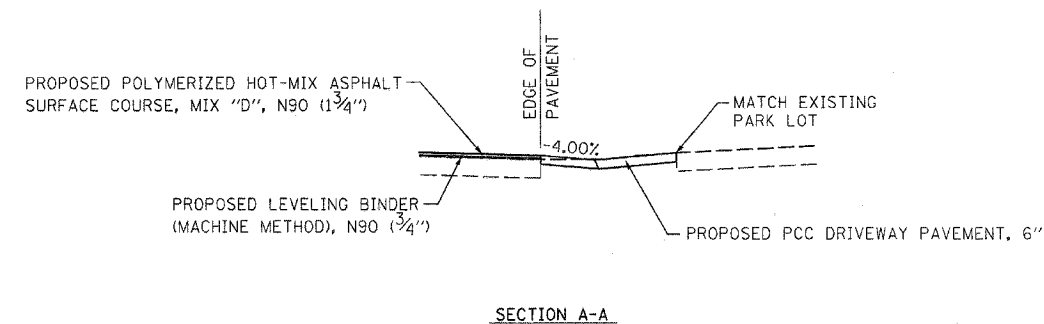


SHOULDER			
LOCATION	SIDE	PAVED SHOULDER REMOVAL	HOT-MIX ASPHALT SHOULDERS
		SQ YD	TON
STATE STREET			
28+18.52 TO 28+43.54	LT		5
28+18.52 TO 28+81.37	LT	55	
28+18.52 TO 29+54.64	RT	65	
28+57.22 TO 28+85.55	LT		6
30+34.80 TO 31+76.54	LT	73	
30+44.54 TO 31+76.54	RT	86	
31+05.78 TO 31+76.54	LT		13
31+07.24 TO 31+76.54	RT		13
TOTAL:		279	37

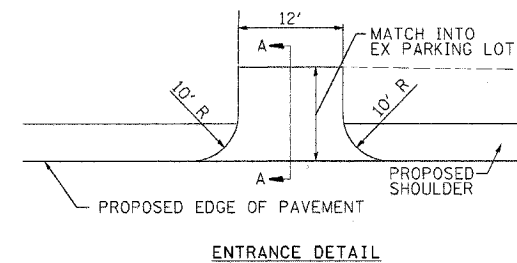

PATCHING		
LOCATION	SIDE	CLASS D PATCHES, TYPE II
		SQ YD
STATE STREET		
29+10.82 TO 29+13.95	LT/RT	9
30+41.88 TO 30+55.90	LT/RT	9
31+01.37 TO 31+04.50	LT/RT	8
GREENMOUNT		
39+38.43 TO 39+41.56	LT/RT	11
OBERNUEFEMANN		
40+52.94 TO 40+56.36	LT/RT	11
41+73.79 TO 41+77.80	LT	0
TOTAL:		48

ENTRANCE				
LOCATION	SIDE	WIDTH	DRIVEWAY PAVEMENT REMOVAL	PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 6 INCH
			SQ YD	SQ YD
STATE STREET				
28+50.34	LT	12		24
28+87.82	LT	11	16	
TOTAL:			16	24

SIDEWALK				
LOCATION	SIDE	SIDEWALK REMOVAL	PORTLAND CEMENT CONCRETE SIDEWALK 4 INCH	DETECTABLE WARNINGS
		SQ FT	SQ FT	SQ FT
28+63.41 (STATE STREET) TO 38+99.59 (GREENMOUNT)	SW QUADRANT	632	980	40
29+14.98 (STATE STREET) TO 40+87.38 (OBERNUEFEMANN)	NW QUADRANT		591	40
39+00.53 (GREENMOUNT) TO 31+09.63 (STATE STREET)	SE QUADRANT	645	830	40
40+88.04 (OBERNUEFEMANN) TO 31+14.58 (STATE STREET)	NE QUADRANT		801	40
TOTAL:		1277	3202	160