5–02 A
5 S 010 I074 R181.19
LEFT SIGN

12.0" Radius, 2.0" Border, White on Green;
[EXIT 183] E Mod 2K;
12.0" Radius, 2.0" Border, White on Green;
[Lincoln] ClearviewHwy-5-W; [Avenue] ClearviewHwy-5-W; [1 MILE] E Mod 2K;
Table of letter and object lefts.

E 36.5	X 45.4	I 56.1	T 60.0	1 82.4	8 90.5	3 104.9	
L 19.3	i 33.1	n 42.6	c 59.1	o 74.0	l 91.8	n 101.6	
A 18.1	v 35.6	e 51.5	n 68.6	u 85.8	e 102.1		
1 39.6	M 59.1	I 71.3	L 76.0	E 85.0			

5–02 B
5 S 010 I074 R181.19
RIGHT SIGN

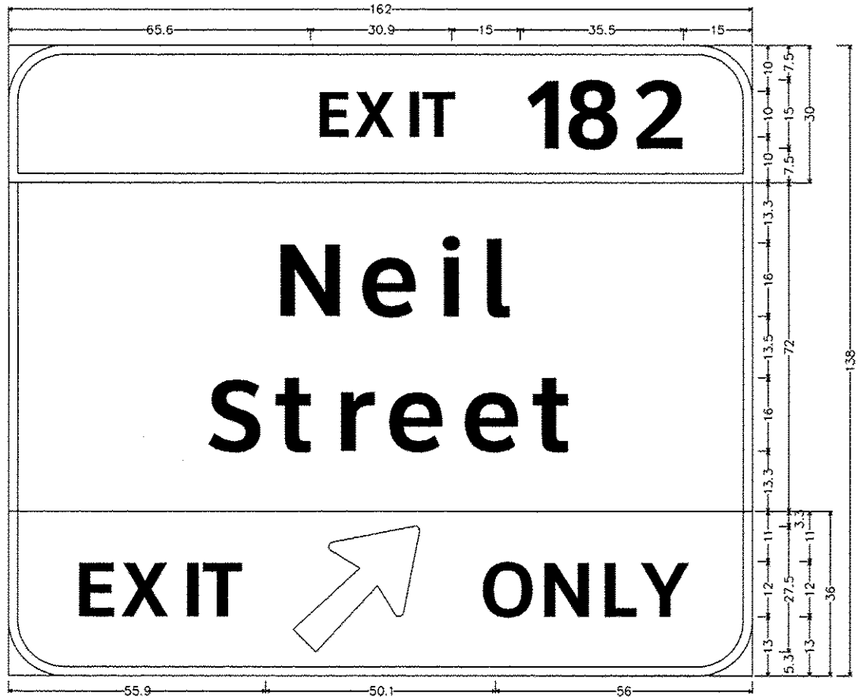

12.0" Radius, 2.0" Border, White on Green;
[EXIT 182] E Mod 2K;
12.0" Radius, 2.0" Border, White on Green;
[Neil] ClearviewHwy-5-W; [Street] ClearviewHwy-5-W;
12.0" Radius, 2.0" Border, Black on Yellow;
[EXIT] E Mod 2K; Arrow 160 – 35.0" 45[; [ONLY] E Mod 2K;
Table of letter and object lefts.

E 65.6	X 74.5	i 85.3	T 89.0	1 111.5	8 119.5	2 134.9			
N 55.9	e 74.6	i 91.5	l 100.9						
S 41.5	t 56.5	r 69.1	e 80.5	e 97.0	t 112.6				
E 12.9	X 23.5	i 36.4	T 41.0	⇗ 61.9	O 101.4	N 114.4	L 127.4	Y 137.0	

• D-5 OVD SIN STR REPL 2013-09

FILE NAME = c:\pw_work\pwidot\bucklesjj\d0308231\D546222-Sht-Sign_Details.dgn	USER NAME = bucklesjj	DESIGNED -	REVISED -
		DRAWN -	REVISED -
	PLOT SCALE = 40.0000 ' / in.	CHECKED -	REVISED -
$MODELNAME$	PLOT DATE = 8/22/2012	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: | SHEET OF SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
74	•	CHAMPAIGN	50	23
		CONTRACT NO. 46222		
	ILLINOIS FED. AID PROJECT			