

**DIMENSION 'E'**

GRADE	'D'=0°		'D'=5°		'D'=10°	
	UPGRADE END	DOWNGRADE END	UPGRADE END	DOWNGRADE END	UPGRADE END	DOWNGRADE END
0%	2 3/8"	2 3/8"	2 3/8"	2 3/8"	2 3/8"	2 3/8"
Over 0% to 1%	2 3/8"	2 3/8"	2 1/4"	2 3/8"	2 1/8"	2 1/2"
Over 1% to 2%	2 3/8"	2 3/8"	2 1/8"	2 1/2"	1 7/8"	2 3/4"
Over 2% to 3%	2 3/8"	2 3/8"	2"	2 5/8"	1 5/8"	3"
Over 3% to 4%	2 3/8"	2 3/8"	1 7/8"	2 3/4"	1 3/8"	3 1/4"

**NOTES**


- The Backwall and the portion of the Wingwalls above the bonded construction joint shall be cast against the in-place beam.
- Reinforcement bars shall conform to the requirements of A.A.S.H.T.O. M-31 or M-322, Grade 60.
- Space reinforcement in cap to miss anchor bolts.

**MAXIMUM PILE LOADS**

SPAN	TONS
30'	27
35'	30
40'	32
45'	34




**DESIGN STRESSES**

f'c = 3,500 psi  
fy = 60,000 psi

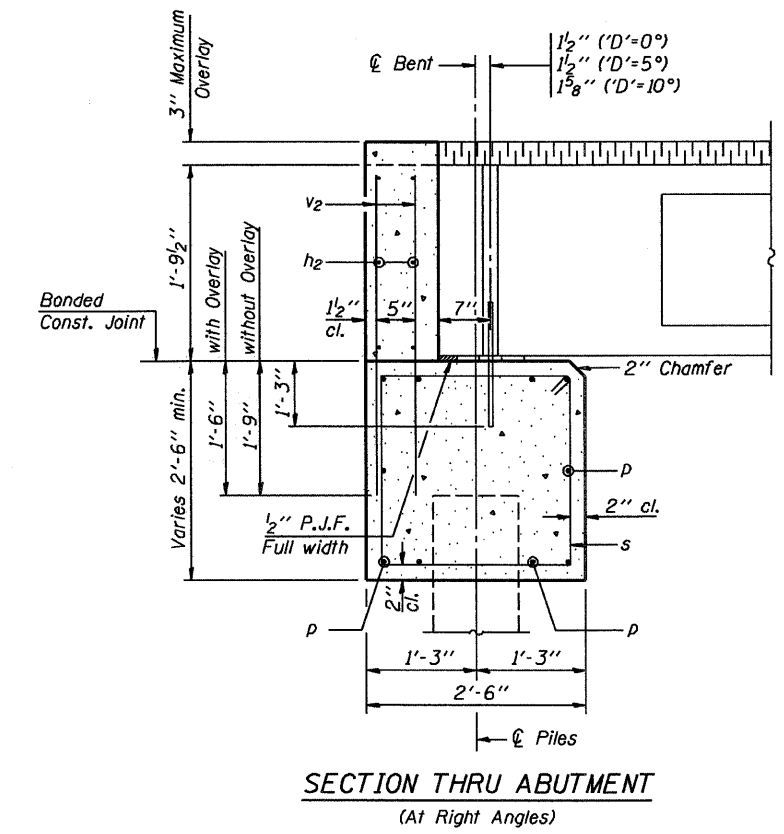

**BILL OF MATERIAL FOR ONE ABUTMENT**

Bar	No.	Size	Length	Shape
h	16	#4	5'-0"	—
h1	4	#4	5'-3"	—
h2	6	#4	24'-9"	—
p	10	#7	24'-9"	—
s	27	#4	9'-5"	□
u	8	#6	11'-1"	□
v	8	#4	2'-8"	—
v1	8	#4	3'-8"	—
v2	50	#4	3'-5"	—
Concrete Structures			8.6 Cu. Yds.	
Reinforcement Bars			1120 Lb.	

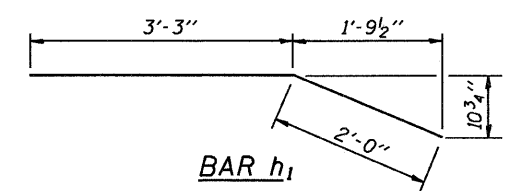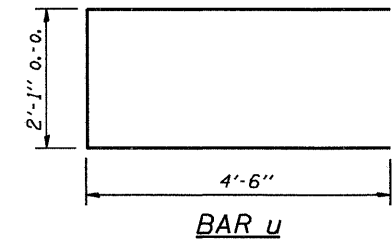

Illinois Department of Transportation  
 PASSED APRIL 4, 2005  
 Thomas J. Damagala  
 Engineer of Bridge Design  
 APPROVED APRIL 4, 2005  
 Ralph E. Anderson  
 Engineer of Bridges and Structures

P.P.C. DECK BEAMS  
 PILE BENT ABUTMENT  
 24' RDWY. 21" BMS. 'D'=0°, 5° OR 10°  
 STANDARD CA-2421-10