


GENERAL NOTES

1. Slipforming of the parapets is not allowed.
2. Reinforcement bars designated (E) shall be epoxy coated.


INDEX OF SHEETS

- S-1 General Plan and Elevation
- S-2 Index, General Notes and Total Bill of Material
- S-3 Plan and Elevation (1 of 2)
- S-4 Plan and Elevation (2 of 2)
- S-5 Typical Sections
- S-6 Typical Sections and Details
- S-7 Parapet and Anchorage Slab Reinforcement (1 of 4)
- S-8 Parapet and Anchorage Slab Reinforcement (2 of 4)
- S-9 Parapet and Anchorage Slab Reinforcement (3 of 4)
- S-10 Parapet and Anchorage Slab Reinforcement (4 of 4)
- S-11 Parapet and Anchorage Slab Details (1 of 2)
- S-12 Parapet and Anchorage Slab Details (2 of 2)
- S-13 Boring Logs
- S-14 Boring Logs

EAST RETAINING WALL TOTAL BILL OF MATERIAL		
ITEM	UNIT	TOTAL
Porous Granular Backfill	Cu Yd	545
Aggregate Subgrade Improvement 12"	Sq Yd	400
Structure Excavation	Cu Yd	2,383
Concrete Structures	Cu Yd	391.2
Concrete Superstructure	Cu Yd	231.2
Form Liner Textured Surface	Sq Ft	2,750
Reinforcement Bars, Epoxy Coated	Pound	76,040
Slope Wall 4 Inch	Sq Yd	430
Geocomposite Wall Drain	Sq Yd	410
Pipe Underdrains For Structures 6"	Foot	381

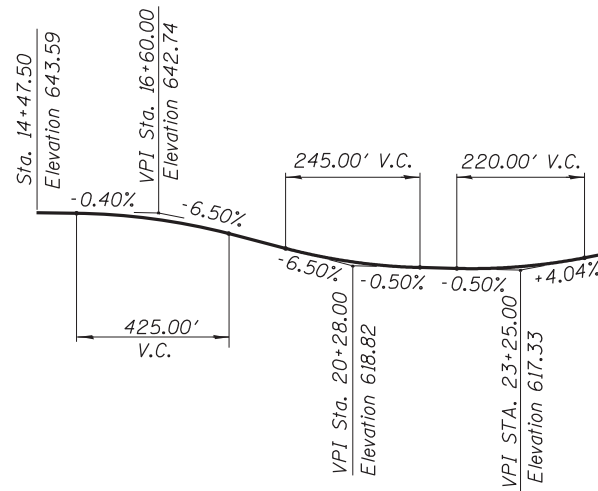

PROFILE GRADE - S.B. MANNHEIM ROAD EXIT RAMP

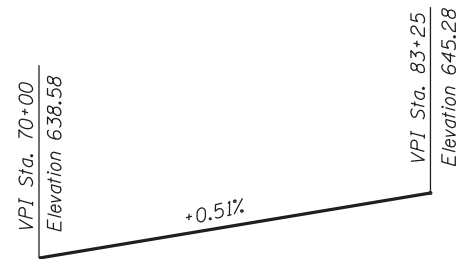

PROFILE GRADE - S.B. MANNHEIM ROAD

N:\ROSEMONT\11000\CADD_Sheets\DI166037-shr-ewell-02-cebdgr

CHRISTOPHER B. BURKE ENGINEERING, LTD.
 8575 W. Higgins Road, Suite 600
 Rosemont, Illinois 60018
 (847) 924-6900

USER NAME =	DESIGNED - JMB	REVISED
	CHECKED - MM	REVISED
PLOT SCALE =	DRAWN - PDR	REVISED
PLOT DATE =	CHECKED - MM	REVISED

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

**GENERAL NOTES AND BILL OF MATERIAL
 EAST RETAINING WALL - STRUCTURE NO. 016-1401**

SHEET NO. S-2 OF S-14 SHEETS

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
330	0105 WRS&HB	COOK	605	404
CONTRACT NO. 60G37				
ILLINOIS FED. AID PROJECT				