



TYPICAL SECTIONS

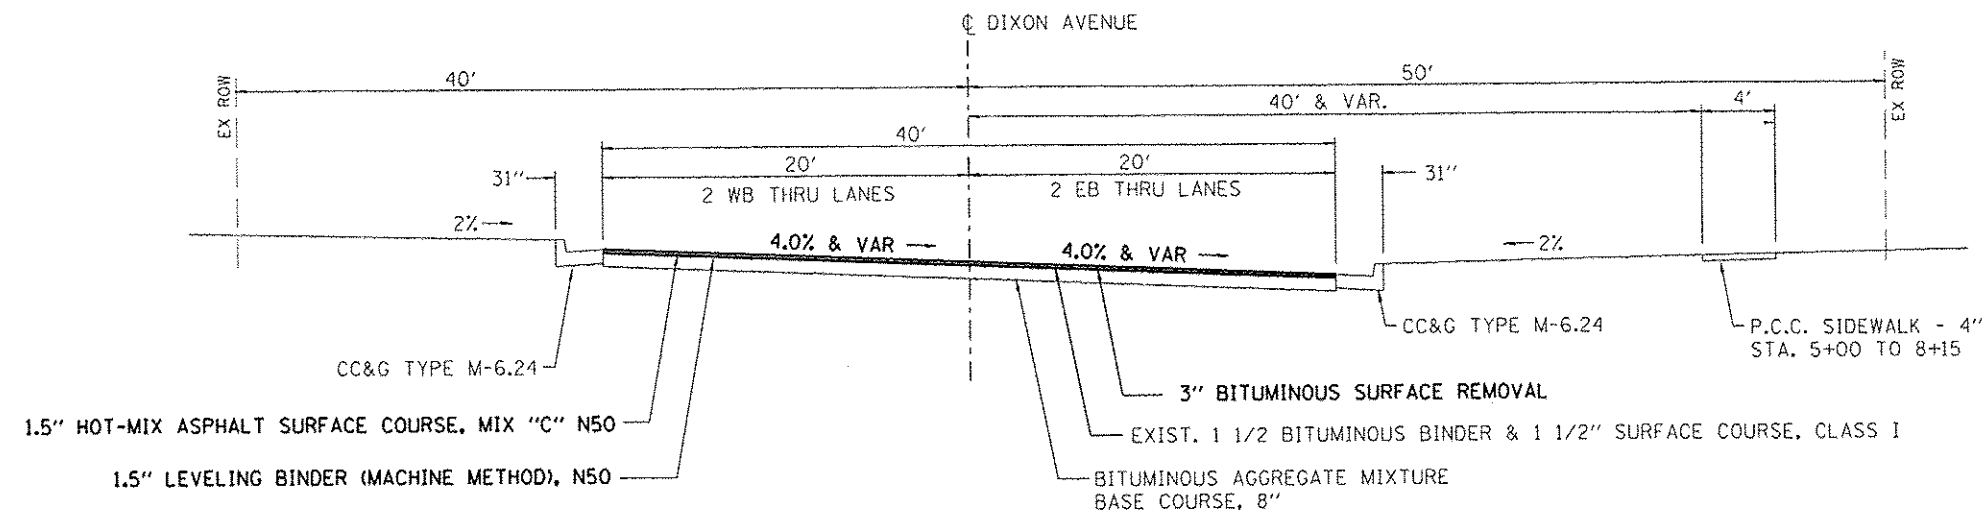

DIXON AVENUE - TYPICAL SECTION
STA. 5+00 TO 13+88.64

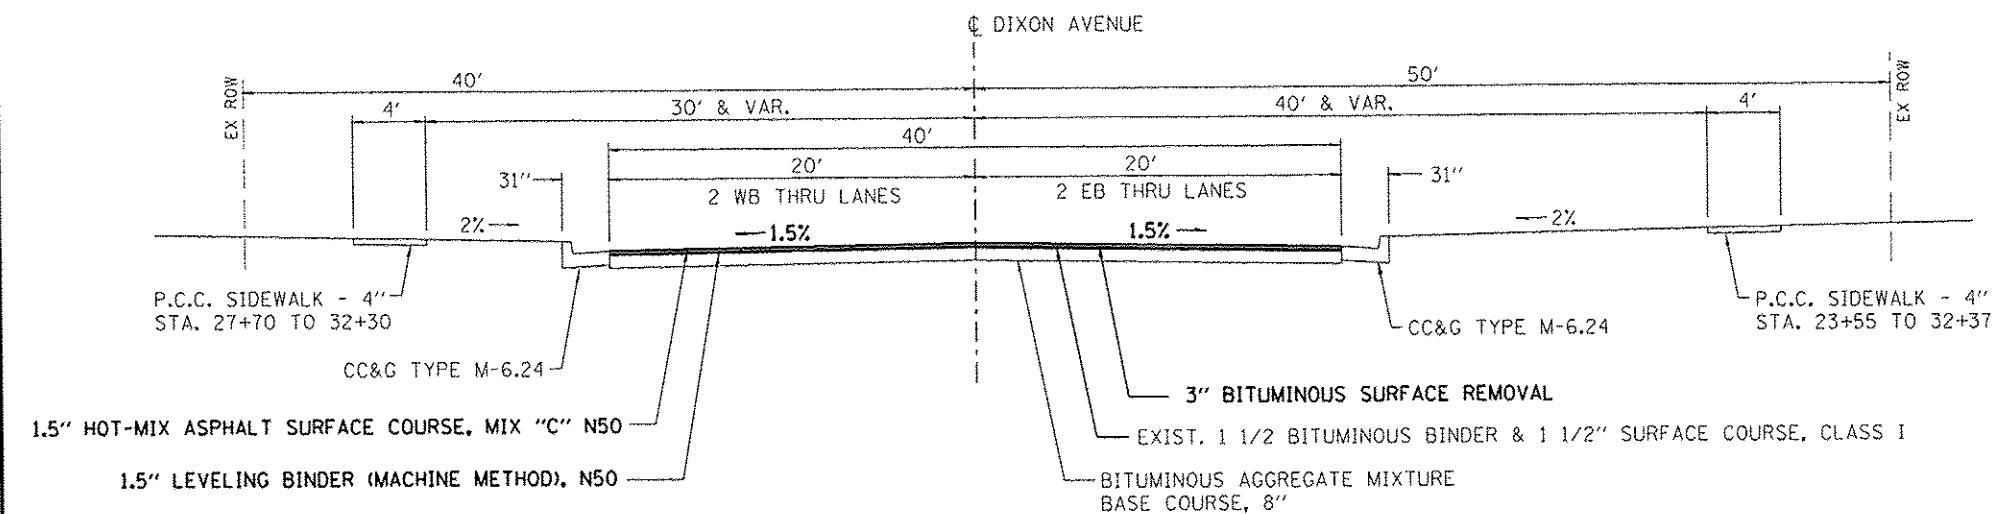

DIXON AVENUE - TYPICAL SECTION
STA. 13+88.64 TO 32+37

PAVEMENT MIXTURE REQUIREMENTS

	CONSTRUCTION	
	SURFACE & LB	BOT. OF PATCH
PG:	PG 64-22	PG 64-22
DESIGN AIR VOIDS	4.0 @ N50	4.0 @ N50
MIXTURE COMPOSITION (GRADATION MIXTURE)	IL 9.5	IL 19.0
FRICTION AGGREGATE	C	NA

PAVEMENT STRUCTURAL DESIGN
DIXON AVENUE

STRUCTURAL DESIGN TRAFFIC (S.D.T.) = YEAR 2022
 CLASS I STREET

P.V. 6332
 S.U. 504
 M.U. 359 } 7195 ADT

USE
 1 1/2" HOT-MIX ASPHALT SURFACE COURSE, MIX "C" N50
 1 1/2" LEVELING BINDER (MACHINE METHOD), N50

FILE - S:\PROJECTS\2011\1014211_RFD\TXAVE.DESIGN\TRANS.TYPICAL.S.DGN

REVISION	DATE	BY	REMARKS

DRAWN D.L.B.
 CHECKED J.R.R.
 APPROVED G.F.S.

CITY OF ROCK FALLS
DIXON AVENUE RESURFACING PROJECT
 2012



SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
DIXON AVENUE TYPICAL SECTIONS	WHITESIDE	19	4
STA. 2+24.25 - 32+37.00	DATE: DEC. 14, 2012		