


EROSION CONTROL LEGEND

- | | | | |
|--|--|--|---|
| | TEMPORARY EROSION CONTROL SEEDING AND TEMPORARY EROSION CONTROL BLANKET | | TEMPORARY DITCH CHECK |
| | PERMANENT SEEDING (SEE NOTE 3) | | TEMPORARY DITCH CHECK INSTALLED IN PREVIOUS STAGE |
| | TEMPORARY EROSION CONTROL SEEDING OR PERMANENT SEEDING INSTALLED IN A PREVIOUS STAGE | | INLET & PIPE PROTECTION |
| | TEMPORARY PAVEMENT | | INLET & PIPE PROTECTION INSTALLED IN PREVIOUS STAGE |
| | PERIMETER EROSION BARRIER (SEE NOTE 2) | | FLOW DIRECTION (SEE NOTE 4) |
| | PERIMETER EROSION BARRIER INSTALLED IN PREVIOUS STAGE | | PROPOSED STORM SEWER (SEE NOTE 1) |
| | INLET FILTER | | PROPOSED STORM SEWER INSTALLED IN PREVIOUS STAGE |
| | INLET FILTER INSTALLED IN PREVIOUS STAGE | | TEMPORARY PIPE CULVERT |
| | PERMANENT DRAINAGE STRUCTURE NUMBER (SEE NOTE 1) | | |

NOTES

- SEE PROPOSED DRAINAGE PLANS FOR STORM SEWER INFORMATION
- PERIMETER EROSION BARRIER SHALL BE ERECTED ADJACENT TO R.O.W., EASEMENT, AND CONSTRUCTION LIMITS AND AS DIRECTED BY THE ENGINEER.
- SEE LANDSCAPING PLANS FOR LANDSCAPING REQUIREMENTS.
- SEE STAGE 3 CROSS SECTIONS FOR GRADING INFORMATION.

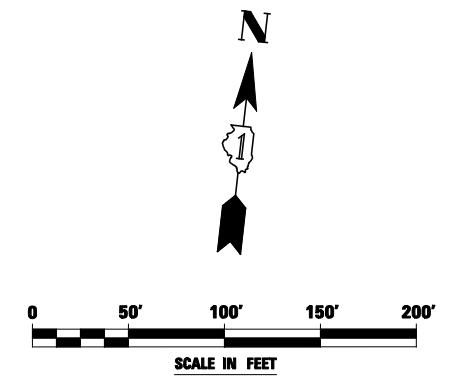

FILE NAME = #FILEL#	USER NAME = #USER#	DESIGNED <i>PJO</i>	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	EROSION CONTROL - STAGE 3, 3A, 3B, AND 3C INTERSTATE 88	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
		DRAWN <i>KES</i>	REVISED -			338	(112 & 113) WRS-5	DUPAGE	963	528	
		CHECKED <i>JCM</i>	REVISED -			CONTRACT NO. 60I31					
		DATE <i>10/15/2012</i>	REVISED -			ILLINOIS FED. AID PROJECT					
				SCALE:	SHEET NO. 53 OF 66 SHEETS	STA. 6521+00	TO STA. 6533+00				