


STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

3'' Radius

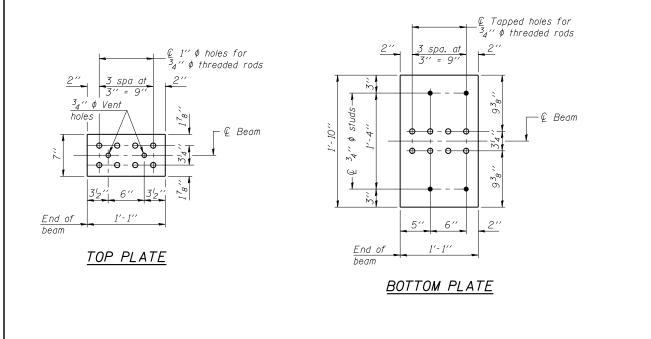



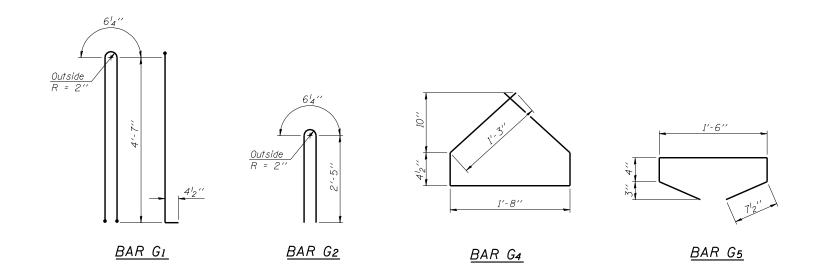

DESIGNED	DPN	Jan 23,2007
СНЕСКЕД	AJB	EXAMINED Thomas & Romanalski
DRAWN	h.t. duong	PASSED Ralph E. anderson
CHECKED	FT/AJB/DPN	ENGINÉER OF BRIDGES AND STRUCTURES

ROUTE NO.	SECTION	COUNTY		TOTAL SHEETS	SHEET NO.	SHEET NO. 12
FAP 662	(V,T)B-2	MACOUPIN		66	38	20 SHEETS
FED. ROAD DIST. NO. 7		ILL INDIS	FED. ALD PROJECT-			

Contract #72993

<u>NOTES</u>

Inserts for ${}^3_4{}'' \phi$ threaded dowel rods, when specified, are to be two strut, coil type for interior beams and single coil, flared loop type for exterior beams.

Prestressing steel shall be uncoated high strength, low relaxation 7-wire strand, Grade 270.

The nominal diameter shall be $l_2^{\prime\prime}{}^{\prime\prime}$ and the nominal cross-sectional area shall be 0.153 sq. in.

Non-prestressing steel shall conform to ASTM A 706 (IL MOD), Grade 60. A minimum $2l_2'' \phi$ lifting pin shall be used to engage the lifting loops during handling.

The bottom plates and studs shall be galvanized according to AASHTO M 111. Threaded rods shall be ASTM F 1554 Grade 55.

The cut strands at each beam end shall be given two coats of zinc dust spray or paint meeting the requirements of ASTM A 780. The zinc dust spray or paint shall be applied before corrosion appears and allowed to dry according to the manufacturer's specifications prior to another coat of zinc. A concrete sealer meeting the requirements of Section 587 of the Standard Specifications shall be applied to all portions of the I-beam or Bulb-T beam, except the top surface of the top flange and the bottom surface of the bottom flange, starting at each beam end and extending out a distance of 54 inches. The sealer shall be applied after visible crack growth has subsided. This work shall be performed by the producer and included with the cost of the beam.

BILL OF MATERIAL

Item	Unit	Total
Furnishing and Erecting Precast Prestressed Concrete I-Beams, 54''	Ft.	524.5

54" PPC I-BEAM DETAILS F.A.P. RT. 662 SECTION (V,T)B-2 MACOUPIN COUNTY STATION 447+03.80 STRUCTURE NO. 059-0504