


**TRAFFIC SIGNAL SCHEDULE OF QUANTITIES**


Code No.	Pay Item	Unit	Quantity
85000200	Maintenance of Existing Traffic Signal Installation	Each	1
87301305	Electric Cable in Conduit, Lead-In, No. 14 1 Pair	Foot	880
87900200	Drill Existing Handhole	Each	4
88500100	Inductive Loop Detector	Each	3
88600100	* Detector Loop, Type 1	Foot	220
89502300	Remove Electric Cable from Conduit	Foot	770
X0324599	Rod and Clean Existing Conduit	Foot	700

**TRAFFIC SIGNAL LEGEND**

- SIGNAL HEAD WITH BACKPLATE
- SIGNAL HEAD
- GALVANIZED STEEL CONDUIT IN TRENCH OR PUSHED
- DETECTOR LOOP
- VEHICLE DETECTOR, NON COMPENSATED MAGNETIC TYPE
- RACEWAY FOR MAGNETIC DETECTOR, TYPE I OR TYPE II



\* Contract shall determine what type amplifiers shelf/rack mounts are needed in the existing traffic signal controller cabinet.

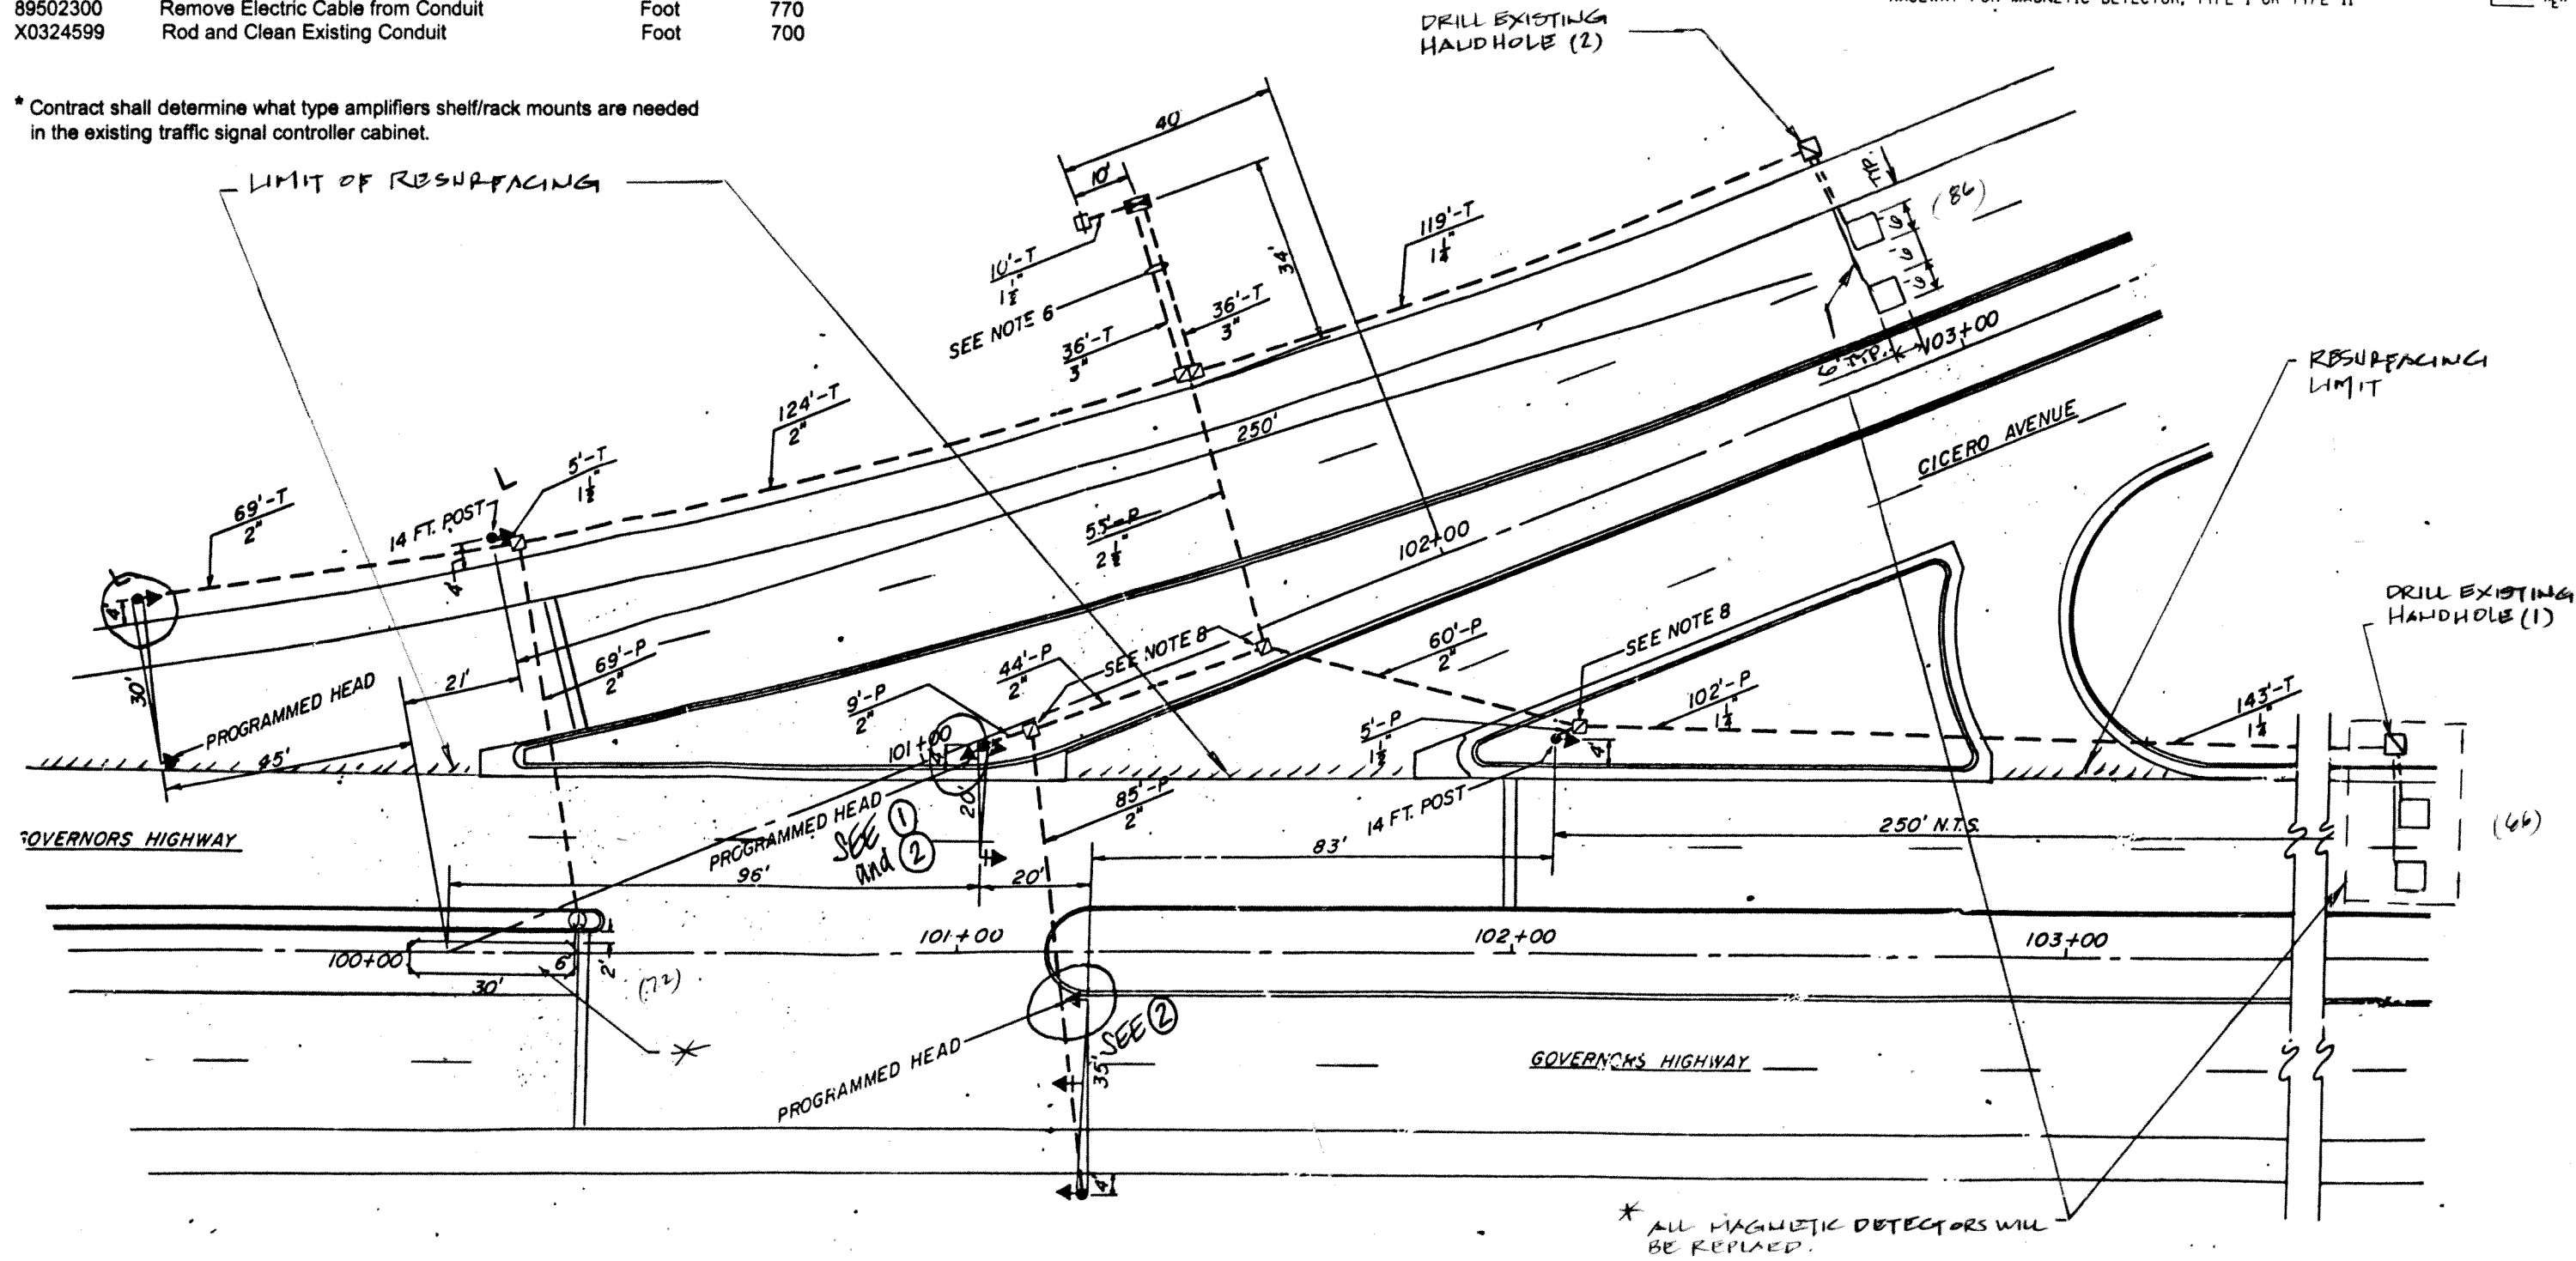

\* ALL MAGNETIC DETECTORS WILL BE REPLACED.

**REPLACE ALL DETECTOR LOOPS AS SHOWN (WITHIN THE RESURFACING LIMITS)**

CODE	QUANTITY	UNIT	ITEM
88600600	- 0 -	FOOT	DETECTOR LOOP, REPLACEMENT

**THIS PLAN IS FOR THE SOLE PURPOSE OF DETECTOR LOOP REPLACEMENTS ONLY**

\* SEE PAY ITEMS

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

DISTRICT ONE - DETECTOR LOOP REPLACEMENT  
ILL. RTE. 50 (CICERO AV) @ GOVERNOR'S HWY.

FILE NAME	USER NAME	DESIGNED	REVISED	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
c:\pv\work\p\dot\placencas\112618\1\shen.dgn	placencas	-	-	350	(101W-EXT-R)RS	WILL	31	30
PLOT SCALE	PLOT DATE	CHECKED	REVISED	CONTRACT NO. 60V65				
1/8" = 1'-0"	6/22/2011	-	-					