

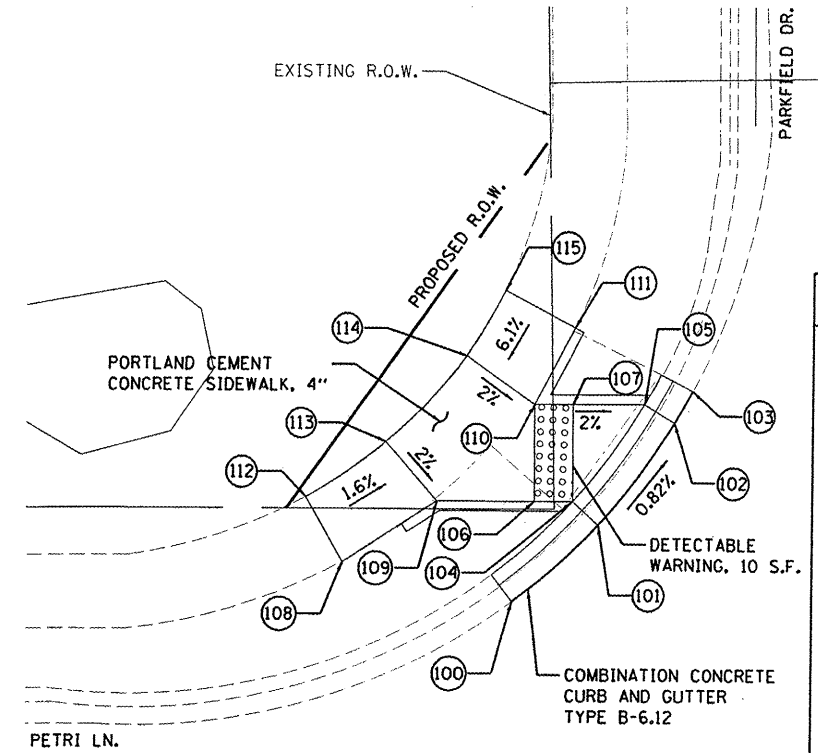


© Copyright Hanson Professional Services Inc. 2011
HANSON
 Hanson Professional Services Inc.

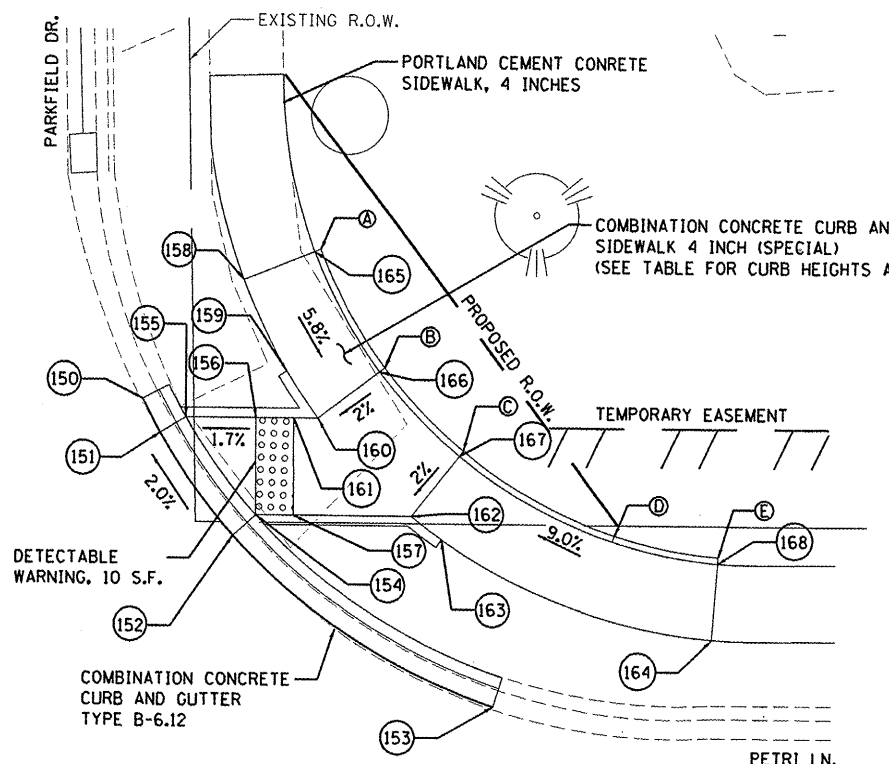

**PETRI LN. AND PARKFIELD DR.
NORTH WEST SIDEWALK RAMP**
SCALE: 1" = 5'

POINT NO.	STA.	OFF	ELEV.	DESCRIPTION
100	15+86.62	22.14' LT	518.15	EX. EDGE OF PAVEMENT
101	15+91.06	26.15' LT	518.17	EX. EDGE OF PAVEMENT
102	15+95.00	31.42' LT	518.12	EX. EDGE OF PAVEMENT
103	15+95.93	33.07' LT	518.10	EX. EDGE OF PAVEMENT
104	15+89.74	27.37' LT	518.17	DETECTABLE WARNING AND BACK OF CURB
105	15+93.43	32.37' LT	518.12	BACK OF CURB
106	15+87.74	27.37' LT	518.21	DETECTABLE WARNING
107	15+89.72	32.37' LT	518.19	DETECTABLE WARNING
108	15+77.89	24.19' LT	518.48	EX. EDGE OF SIDEWALK
109	15+82.70	27.37' LT	518.31	PR. EDGE OF SIDEWALK
110	15+87.72	32.36' LT	518.23	DETECTABLE WARNING
111	15+89.79	36.28' LT	518.54	EX. EDGE OF SIDEWALK
112	15+76.01	27.54' LT	518.40	EX. BACK OF SIDEWALK
113	15+80.10	30.40' LT	518.39	BACK OF SIDEWALK
114	15+84.21	34.84' LT	518.32	BACK OF SIDEWALK
115	15+86.19	38.17' LT	518.52	EX. BACK OF SIDEWALK



**PETRI LN. AND PARKFIELD DR.
NORTH EAST SIDEWALK RAMP**
SCALE: 1" = 5'

COMB. CONC. CURB AND SIDEWALK 4 INCH (SPECIAL)		
POINT	CURB HEIGHT	ELEV.
A	0"	519.23
B	6"	519.28
C	6"	519.35
D	6"	520.19
E	0"	520.20

POINT NO.	STA.	OFF	ELEV.	DESCRIPTION
150	16+34.94	33.29' LT	518.49	EX. EDGE OF PAVEMENT
151	16+35.89	31.55' LT	518.57	EDGE OF PAVEMENT
152	16+39.76	26.28' LT	518.70	EDGE OF PAVEMENT
153	16+53.46	17.49' LT	519.25	EX. EDGE OF PAVEMENT
154	16+40.93	27.35' LT	518.70	DETECTABLE WARNING AND BACK OF CURB
155	16+37.26	32.35' LT	518.57	BACK OF CURB
156	16+40.92	32.34' LT	518.64	DETECTABLE WARNING
157	16+42.93	27.35' LT	518.74	DETECTABLE WARNING
158	16+40.24	39.40' LT	519.12	EDGE OF SIDEWALK
159	16+42.54	34.78' LT	518.85	EDGE OF SIDEWALK
160	16+44.21	32.35' LT	518.70	EDGE OF SIDEWALK
161	16+42.92	32.35' LT	518.68	DETECTABLE WARNING
162	16+49.09	27.35' LT	518.77	EDGE OF SIDEWALK
163	16+50.69	26.15' LT	518.97	EDGE OF SIDEWALK
164	16+65.03	21.04' LT	520.12	EDGE OF SIDEWALK
165	16+43.96	40.86' LT	519.23	BACK OF SIDEWALK
166	16+47.39	34.78' LT	518.78	BACK OF SIDEWALK
167	16+51.59	30.46' LT	518.85	BACK OF SIDEWALK
168	16+65.33	25.03' LT	520.20	BACK OF SIDEWALK

SIDEWALK RAMP NOTES

1. USE TYPE A CURB RAMPS IN ALL LOCATIONS.
2. MAXIMUM SIDEWALK CROSS SLOPE SHALL BE 2.0%.
3. LANDING AREA LOCATED BEHIND THE DETECTABLE WARNING AREAS SHALL HAVE A MAXIMUM SLOPE OF 2.0% IN ANY DIRECTION.