


NORTH WEST SIDEWALK RAMP
SCALE: 1" = 5'

POINT NO.	STA.	OFF.	ELEV.	DESCRIPTION
300	23+79.07	20.75' LT	541.72	EDGE OF PAVEMENT
301	23+85.22	26.08' LT	541.75	EDGE OF PAVEMENT
302	23+88.92	31.34' LT	541.72	EDGE OF PAVEMENT
303	23+90.39	34.39' LT	541.71	EDGE OF PAVEMENT
304	23+84.17	27.00' LT	541.75	DETECTABLE WARNING AND BACK OF CURB
305	23+87.74	32.00' LT	541.72	BACK OF CURB
306	23+82.17	27.00' LT	541.79	DETECTABLE WARNING
307	23+84.16	32.00' LT	541.79	DETECTABLE WARNING
308	23+68.48	23.48' LT	542.50	EX. EDGE OF SIDEWALK
309	23+76.04	27.00' LT	541.91	EDGE OF SIDEWALK
310	23+82.16	31.99' LT	541.83	DETECTABLE WARNING
311	23+81.34	32.00' LT	541.85	EDGE OF SIDEWALK
312	23+85.03	39.43' LT	542.40	EX. EDGE OF SIDEWALK
313	23+67.46	27.26' LT	542.48	EX. BACK OF SIDEWALK
314	23+73.74	30.28' LT	541.99	BACK OF SIDEWALK
315	23+78.20	34.48' LT	541.93	BACK OF SIDEWALK
316	23+81.58	40.58' LT	542.50	EX. BACK OF SIDEWALK

POINT NO.	STA.	OFF.	ELEV.	DESCRIPTION
350	24+29.43	31.22' LT	541.77	EDGE OF PAVEMENT
351	24+33.23	25.94' LT	541.89	EDGE OF PAVEMENT
352	24+34.41	27.00' LT	541.89	DETECTABLE WARNING AND BACK OF CURB
353	24+30.81	32.00' LT	541.77	BACK OF CURB
354	24+34.39	31.99' LT	541.84	DETECTABLE WARNING
355	24+36.41	27.00' LT	541.93	DETECTABLE WARNING
356	24+33.66	37.29' LT	542.28	EX. EDGE OF SIDEWALK
357	24+36.19	32.00' LT	541.88	EDGE OF SIDEWALK AND DETECTABLE WARNING
358	24+40.60	27.00' LT	541.94	EDGE OF SIDEWALK
359	24+48.44	22.27' LT	542.61	EX. EDGE OF SIDEWALK
360	24+37.49	38.64' LT	542.37	EX. BACK OF SIDEWALK
361	24+39.65	34.14' LT	541.96	BACK OF SIDEWALK
362	24+43.15	30.08' LT	542.02	BACK OF SIDEWALK
363	24+49.98	25.97' LT	542.69	EX. BACK OF SIDEWALK

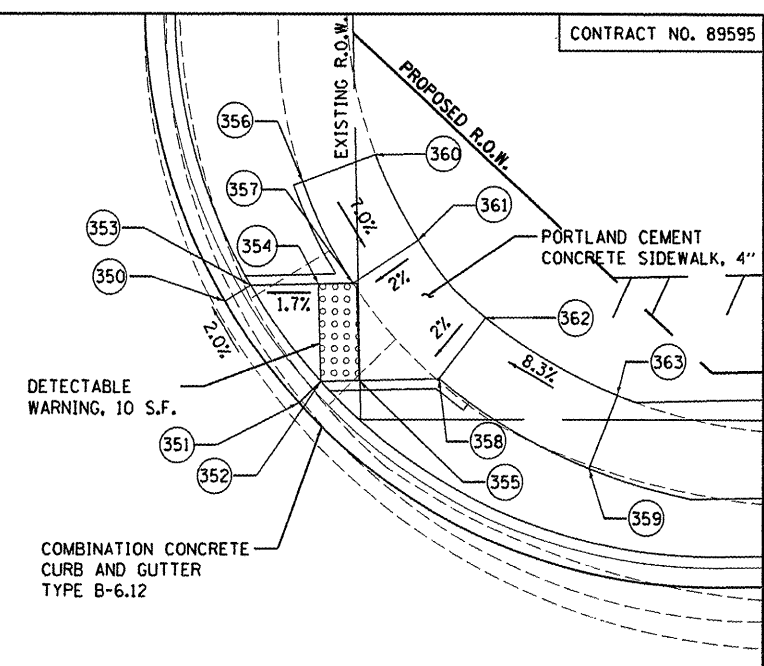

NORTH EAST SIDEWALK RAMP
SCALE: 1" = 5'

SIDEWALK RAMP NOTES

1. USE TYPE A CURB RAMPS IN ALL LOCATIONS.
2. MAXIMUM SIDEWALK CROSS SLOPE SHALL BE 2.0%.
3. LANDING AREA LOCATED BEHIND THE DETECTABLE WARNING AREAS SHALL HAVE A MAXIMUM SLOPE OF 2.0% IN ANY DIRECTION.

