


F.A.P. SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
311 G-10R	KENDALL	514	242
STA. 780+44.91 TO STA. 918+85.88		ILLINOIS FED. AID PROJECT	

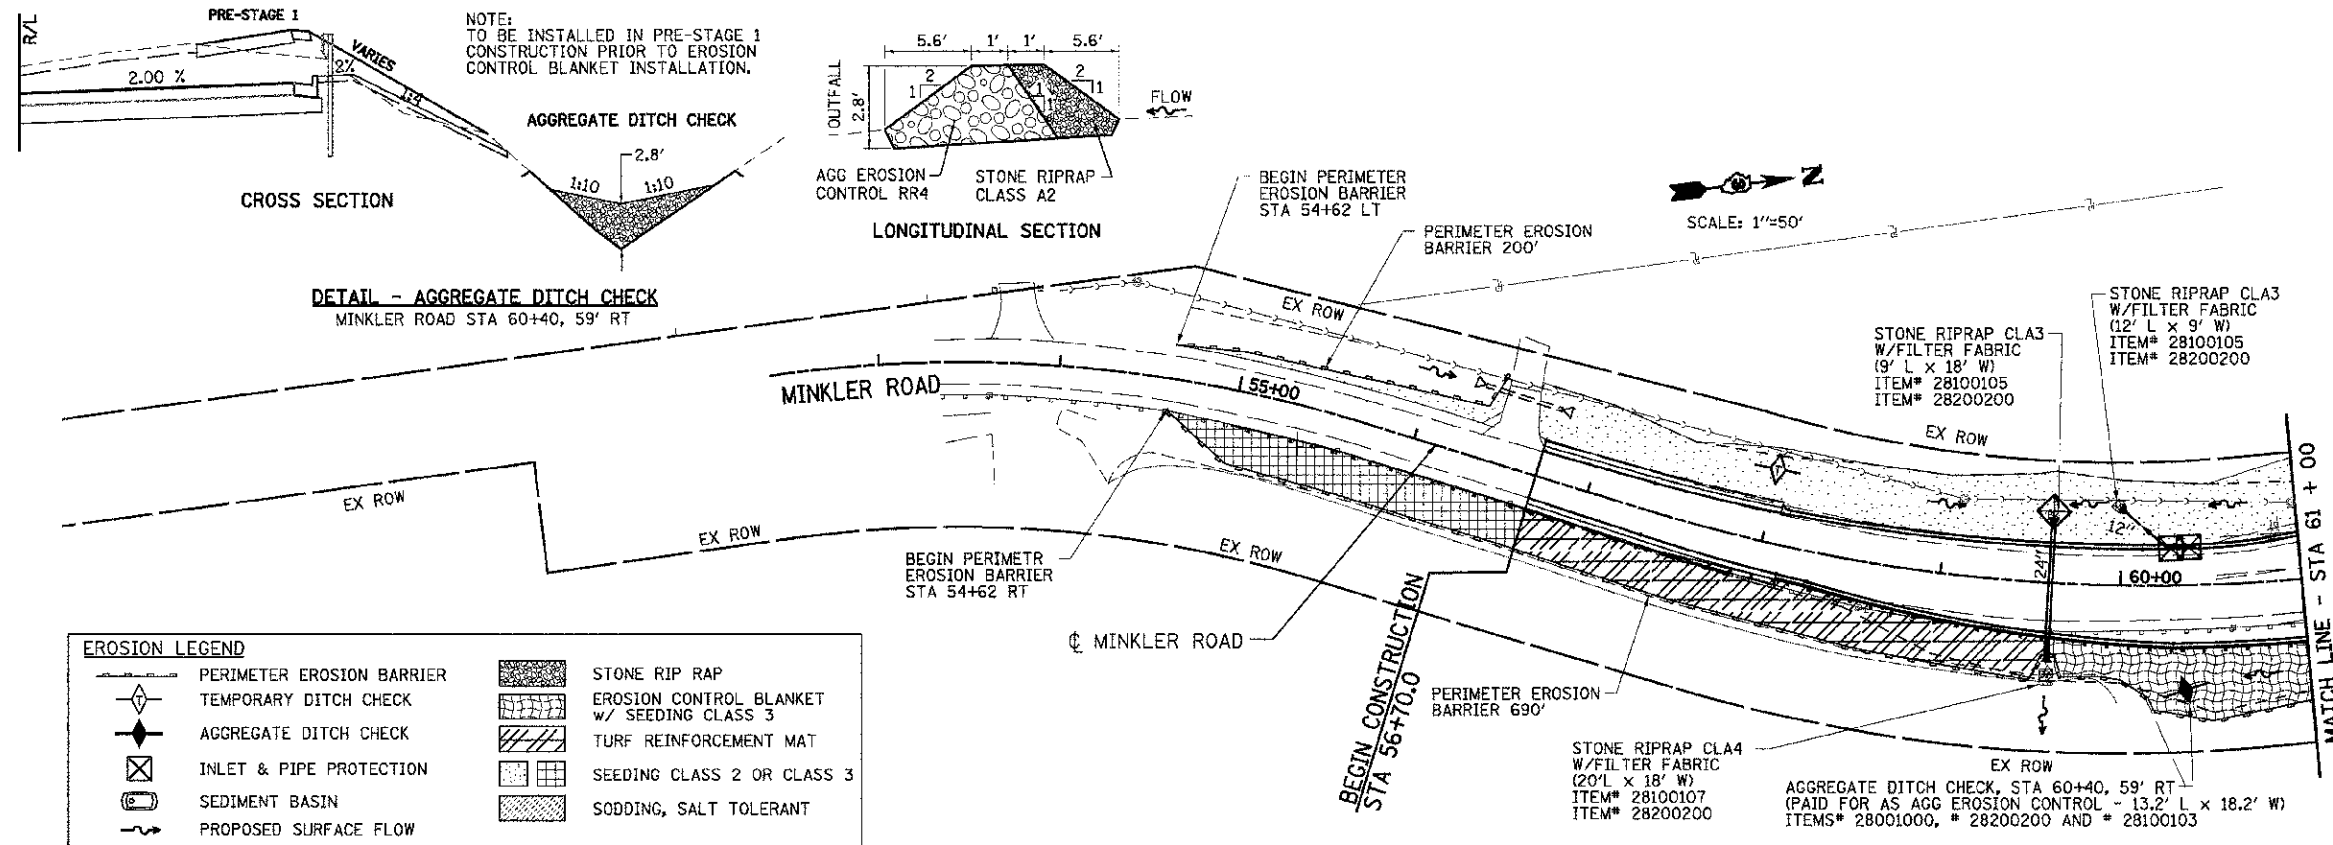


PRE-STAGE 1 TEMPORARY SEEDING:  
STA 54+62 RT TO STA 56+70 RT  
SEEDING, CLASS 7 - 0.357 ACRE  
MULCH, METHOD 1 - 0.357 ACRE

STAGE 1 TEMPORARY SEEDING:  
STA 56+65 LT TO STA 61+00 LT  
SEEDING, CLASS 7 - 0.334 ACRE  
MULCH, METHOD 1 - 0.334 ACRE

STAGE 1B TEMPORARY SEEDING:  
STA 54+62 RT TO STA 61+00 RT  
SEED, CLASS 7 - 0.357 ACRE  
MULCH, METHOD 1 - 0.357 ACRE

STAGE 1 PERMANENT SEEDING:  
STA 56+70 LT TO STA 61+00 LT  
SEEDING, CLASS 2 - 0.334 ACRE  
NITROGEN FERT NUTR - 20.0 LBS  
PHOSPHORUS FERT NUTR - 20.0 LBS  
POTASSIUM FERT NUTR - 20.0 LBS  
MULCH, METHOD 2 - 0.334 ACRE

STAGE 2 PERMANENT SEEDING:  
STA 54+62 RT TO STA 61+00 RT  
SEEDING, CLASS 3 - 0.357 ACRE  
NITROGEN FERT NUTR - 21.4 LBS  
PHOSPHORUS FERT NUTR - 21.4 LBS  
POTASSIUM FERT NUTR - 21.4 LBS  
MULCH, METHOD 2 - 0.357 ACRE

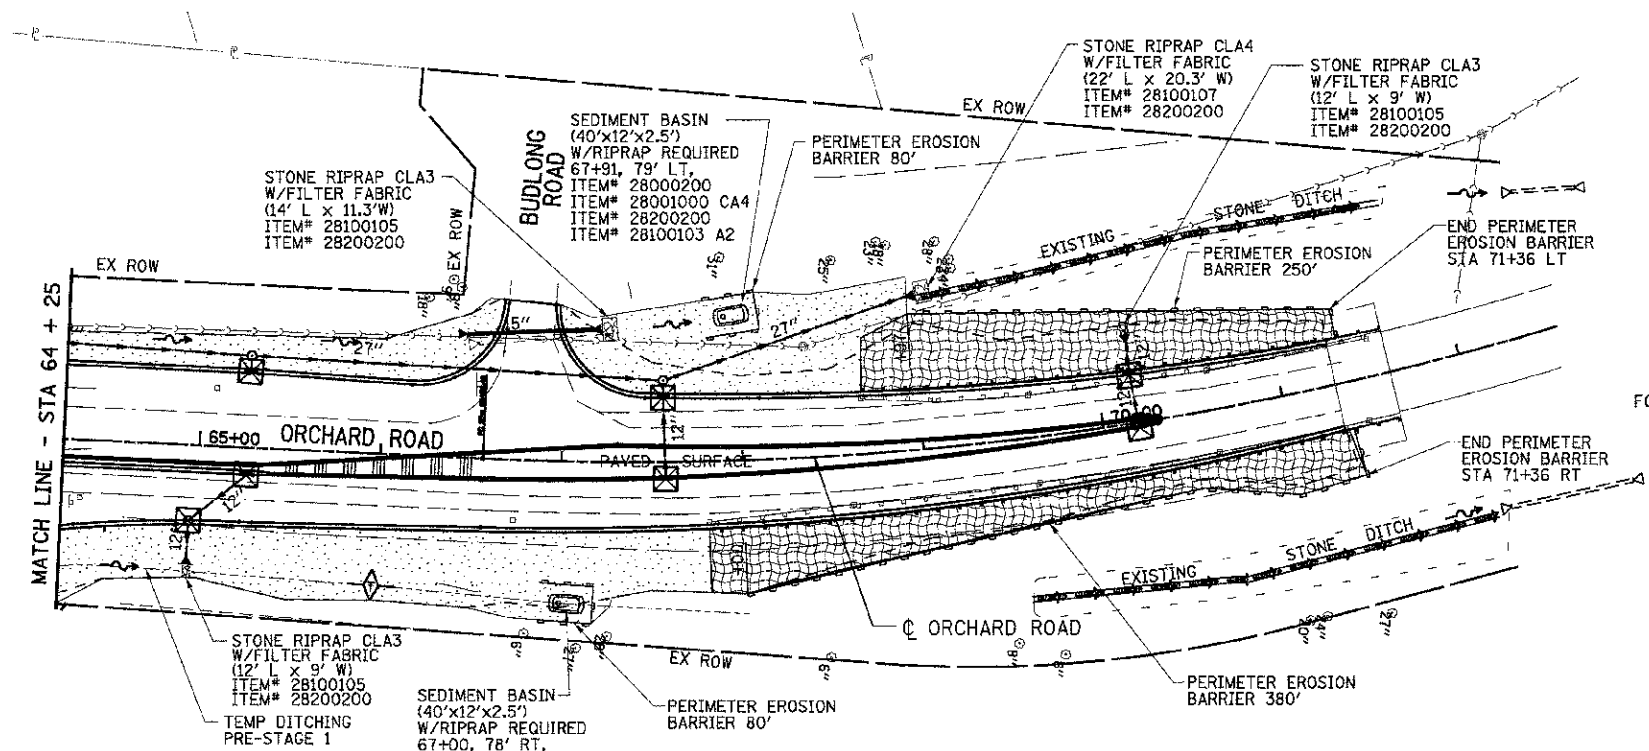

PRE-STAGE 1 TEMPORARY SEEDING:  
STA 64+25 RT TO STA 71+36 RT  
SEED, CLASS 7 - 0.496 ACRE  
MULCH, METHOD 1 - 0.496 ACRE

STAGE 1 TEMP. SEEDING:  
STA 64+25 LT TO STA 71+36 LT  
SEED, CLASS 7 - 0.500 ACRE  
MULCH, METHOD 1 - 0.500 ACRE

STAGE 2 TEMP. SEEDING:  
STA 64+25 RT TO STA 71+36 RT  
SEED, CLASS 7 - 0.496 ACRE  
MULCH, METHOD 1 - 0.496 ACRE

STAGE 1 PERMANENT SEEDING -  
STA 64+25 LT TO STA 71+36 LT  
SEEDING, CLASS 2 - 0.308 ACRE  
SEEDING, CLASS 3 - 0.192 ACRE  
NITROGEN FERTI NUTR - 30.0 LBS  
PHOSPHORUS FERT NUTR - 30.0 LBS  
POTASSIUM FERT NUTR - 30.0 LBS  
MULCH, METHOD 2 - 0.500 ACRE

STAGE 2 PERMANENT SEEDING -  
STA 64+25 RT TO STA 71+36 RT  
SEEDING, CLASS 2 - 0.312 ACRE  
SEEDING, CLASS 3 - 0.184 ACRE  
NITROGEN FERT NUTR - 38.0 LBS  
PHOSPHORUS FERT NUTR - 29.7 LBS  
POTASSIUM FERT NUTR - 29.7 LBS  
MULCH, METHOD 2 - 0.496 ACRE

**INTENDED EROSION AND LANDSCAPE SEQUENCE**

- 1) PLACE PERIMETER EROSION CONTROL BARRIER PRIOR TO COMMENCEMENT OF ANY WORK (SEE ARTICLE 280).
- 2) INSTALL TEMPORARY INLET PROTECTION AT ALL EXISTING AND PROPOSED STRUCTURES AND PIPE INLET AND OUTLETS WITHIN THE PROJECT LIMITS, AND IN ACCORDANCE WITH ARTICLE 280 OF THE IDOT STANDARD SPECIFICATION, (280001 INLET AND PIPE PROTECTION EACH).
- 3) CONSTRUCT EARTHWORK, DITCHES FIRST (MAXIMUM 10 ACRES DISTURBED AT ONE TIME PRIOR TO SEEDING - SEE ARTICLE 202 & 280).
- 4) INSTALL ALL DITCH EROSION ITEMS TO THE NEW DITCH CENTERLINES FROM OFFSETS IN SECTIONS (SEE CROSS SECTIONS)
- 5) PLACE AND MAINTAIN TEMPORARY AND PERMANENT EROSION CONTROL ITEMS FOLLOWING THE STAGED CONSTRUCTION PROCEDURE SHOWN IN THESE PLANS. SEED EVERY 7 DAYS (SEE ARTICLE 280 FOR TEMPORARY EROSION ITEMS AND ARTICLE 250 & 251 FOR PERMANENT SEEDING).
- 6) FINAL SHAPE, GRADE AND PAVE ROADWAY BY STAGING SHOWN IN PLANS.
- 7) PLACE REMAINING PERMANENT EROSION CONTROLS AND LANDSCAPE ITEMS PRIOR TO THE COMPLETION OF EACH STAGE.

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

**EROSION CONTROL PLAN**  
**LANDSCAPING**  
STA 54+62 TO STA 71+36

SCALE: VERT. HORIZ. 1:50  
DATE 07/06/2012

DRAWN BY KDD  
CHECKED BY MO/MEJ

PLOT DATE = 7/9/2012  
 FILE NAME = F:\31103-1150 I 71 Dwg\egp\1150\1150-031150-EROSION.dgn  
 USER = jkohan

**BLOOM COMPANIES, LLC**  
Infrastructure Division and Agency  
200 W. Fulton Street, Suite 701 • Chicago, IL 60601  
Phone: (312) 979-3630 Fax: (312) 979-9630